

Guidance on the Application of the CLP Criteria

Version # #

Month 2024

ABC

Disclaimer

This document aims to assist users in complying with their obligations under the CLP Regulation. However, users are reminded that the text of the CLP Regulation is the only authentic legal reference and that the information in this document does not constitute legal advice. Usage of the information remains under the sole responsibility of the user. The European Chemicals Agency does not accept any liability with regard to the use that may be made of the information contained in this document.

Version	Changes	

Guidance on the application of the CLP criteria

Reference: xxxx-xxxx-xxxx

ISBN: xxxx-xxxx-xxxx

Cat. Number: ED-xxxxxx-xxxx-xxxx

DOI: xx.xxxx/xxxxxx

Publ.date: Month 20xx

Language: EN

© European Chemicals Agency, 20xx

Cover page © European Chemicals Agency

If you have questions or comments in relation to this document please send them (quote the reference and issue date) using the information request form. The information request form can be accessed via the Contact ECHA page at:
<http://echa.europa.eu/contact>

European Chemicals Agency

P.O. Box 400, FI-00121 Helsinki, Finland

Table of Contents

1. HEADING LEVEL 1..... ERROR! BOOKMARK NOT DEFINED.

2. HEADING LEVEL 1..... ERROR! BOOKMARK NOT DEFINED.

2.1 Heading level 2Error! Bookmark not defined.

2.1.1 Heading level 3 Error! Bookmark not defined.

2.1.1.1 Heading level 4Error! Bookmark not defined.

2.1.1.1.1 Heading level 5Error! Bookmark not defined.

2.1.1.1.1.1 Heading level 6.....Error! Bookmark not defined.

2.1.1.1.1.1.1 Heading level 7.....Error! Bookmark not defined.

3. HEADING LEVEL 1..... ERROR! BOOKMARK NOT DEFINED.

3.1 Heading level 2Error! Bookmark not defined.

4. HEADING LEVEL 1..... ERROR! BOOKMARK NOT DEFINED.

4.1 Heading level 2Error! Bookmark not defined.

APPENDIX 1. EXAMPLE ERROR! BOOKMARK NOT DEFINED.

Table of Figures

Figure 1: Test Example..... Error! Bookmark not defined.

Figure 2: Error! Bookmark not defined.

Table of Tables

Table 1: Example..... Error! Bookmark not defined.

1. PART 1: General principles for classification and labelling

Not part of the guidance: for clarity, Parts 1, 3 and 4 have been removed as this update concern only Part 2, i.e. the physical hazards. Consequently, all cross-references to these sections are broken and will be restored on the final version.

2. PART 2: PHYSICAL HAZARDS

1.0 INTRODUCTION

3. General remarks about the prerequisites for classification and testing

The purpose of this chapter is to give some general guidance with respect to the classification of physical hazards, the generation of test data and their interpretation. The general principles of the classification process are explained above in 1.1.3, thus this section refers to physical hazard specificities. ~~The intention of CLP is to identify hazards of chemical substances and mixtures and to provide a systematic approach using classification to communicate them based on harmonized criteria. The classification process involves three steps:~~

- ~~— gathering of relevant information regarding the hazards of a substance or mixture (Articles 5—8 of CLP);~~
- ~~— evaluation of hazard information to ascertain the hazards associated with the substance or mixture (Article 9 of CLP); and~~
- ~~— a decision on whether the substance or mixture will be classified as hazardous and the degree of hazard, where appropriate, by comparison of the data with agreed hazard classification criteria (Article 13 of CLP).~~

~~Generally, for both substances and mixtures, the tests required in Annex I of CLP must be performed unless there is adequate and reliable information already available. Testing is required to determine physical hazards including the physico-chemical properties necessary for the respective classification unless alternative methods are specifically permitted. Before undertaking testing of a substance or mixture, enquiries should be made to ascertain the availability of data, e.g. flash points, on the substance or mixture.~~

Test methods for physical hazards are referred to in each physical hazard class chapter of CLP. Most of these test methods can be found in the UN Manual of Tests and Criteria¹ (UN MTC), see the website http://www.unece.org/trans/danger/publi/manual/manual_e.html. A few of these test methods are contained in standards which are also referred to in CLP (see particularly flammable gases, oxidising gases and flammable liquids). When test result, based on other methods or standards (which are not referred to in CLP) are available, then these data may still be used, provided they are adequate for the purpose of hazard determination. Expert judgement is necessary to conclude whether there is sufficient documentation to assess the suitability of the test method used, and whether the test was carried out using an acceptable level of quality assurance and thus on the adequacy of such data for the purposes of classification according to

¹It should be noted that before GHS rev. 7, the official name of this manual was "UN Recommendations on the Transport of Dangerous Goods – Manual of Tests and Criteria", which is abbreviated "UN RTDG - Manual of Tests and Criteria" in the CLP Regulation. As of GHS rev. 7, however, the official name was changed to "Manual of Tests and Criteria". For this reason, references to this manual are denoted as "Manual of Test and Criteria" or "UN-MTC" when occurring in plain text in this guidance, while they are denoted "UN RTDG - Manual of Tests and Criteria" when occurring in direct quotes from CLP.

CLP.

Please note that in practice the physical hazards of a substance or mixture may differ from those shown by tests, e.g. in case of certain ammonium-nitrate-based compounds (explosive / oxidising properties) and certain halogenated hydrocarbons (flammable properties). Such experience must be taken into account for the purpose of classification (CLP Article 12(a)).

The information available or generated must be checked to determine if it is directly comparable to the respective hazard criteria and if it is, then it can be used to derive the classification immediately. Where the criteria cannot be directly applied to the available data, expert judgement should be used for the evaluation of the available information in a weight of evidence determination (CLP Article 9(3) and CLP Annex I, 1.1.1.).

3.1.1. Safety

~~In most cases, the classification is based on data derived from testing.~~ Special care is required when new or unknown substances or mixtures are tested. If possible, preliminary tests should be carried out before larger quantities are handled. Appendix 6 of the ~~UN Recommendations on the transport of dangerous goods~~ Manual of Tests and Criteria (UN-MTC) 'Screening procedures' allows gathering valuable information about physico-chemical properties based on small-scale tests. Further aspects of safety are given in the general introduction, Section 1.4 of the UN-MTC rev. 8² or within the individual test procedures.

3.1.2. General conditions for testing

Samples offered for testing must in all aspects be representative of the substance or mixture to be classified. Therefore, it is helpful to characterise or specify the sample for the purposes of documentation (i.e. batch number, production code, impurities etc.). Further characterisation (i.e. analysis) is highly recommended in cases where the presence of diluents, activators, stabilisers or moisture may influence the outcome of the test.

~~The tests must be performed on the substance or mixture in the appropriate physical form where changes in that form may influence the outcome of the test (see also Articles 5 and 6 of CLP). see section {place holder for cross link to part 1}. In some cases, test methods as stipulated in the relevant physical hazards sections provide further information on the physical forms that should be tested and if manipulation of the substance is required (e.g. grinding to decrease particle size).~~

~~In some cases, If~~ additional parameters like (e.g.) physical condition, particle size and shape, specific surface area, density, crystal structure, ~~may~~ influence the test result. ~~Therefore~~, these properties should be mentioned in the test report.

~~The tests must be performed on the substance or mixture in the appropriate physical form where changes in that form may influence the outcome of the test (see also Articles 5 and 6 of CLP).~~

3.1.3. Physical state and form

The physical state determines which hazard classes should be considered for testing. As the CLP states³, hazard classification is based on intrinsic properties of the substance or mixture which are determined not only by its physical state but also its form.

² Unless otherwise specified, references to sections, tables, figures, etc. are consistent with UN-MTC rev. 8 (2023).

³ CLP Article 5(1), 6(1) and 8(6), please note that the CLP Regulation is undergoing revision and these references may need to be updated in the future.

The definitions for gases, liquids and solids are given in Annex I, Part 1 of CLP:

Annex I: Part 1, 1.0. Definitions

Gas means a substance which:

(i) at 50 °C has a vapour pressure greater than 300 kPa (absolute); or

(ii) is completely gaseous at 20 °C at a standard pressure of 101.3 kPa;

Liquid means a substance or mixture which:

(i) at 50 °C has a vapour pressure of not more than 300 kPa (3 bar);

(ii) is not completely gaseous at 20 °C and at a standard pressure of 101,3 kPa; and

(iii) which has a melting point or initial melting point of 20 °C or less at a standard pressure of 101,3 kPa;

Solid means a substance or mixture which does not meet the definitions of liquid or gas.

In some cases (i.e. viscous substances or mixtures), a specific melting point cannot be determined. Such a substance or mixture must be regarded as a liquid if either the result of the ASTM D 4359-90 test as amended (standard test method for determining whether a material is a liquid or a solid) indicates 'liquid' or the result of the test for determining fluidity (penetrometer test) prescribed in Section 2.3.4 of Annex A of ADR indicates 'not pasty'.

As mentioned in Chapter 1.2 of this guidance, the same solid substance or mixture may have different forms such as flakes, prills, or powder. Furthermore, e.g. a powder may contain particles of different size, and particles of the same size may have different shapes, crystallinity or allotropy etc. These differences may result in different intrinsic properties, and consequently, different physical hazards of the powder. Particle size is crucial for several classes such as explosives, flammable solids, solid self-reactive substances and mixtures, pyrophoric solids, self-heating substances and mixtures, solid organic peroxides and solid substances which, in contact with water, emit flammable gases. Therefore not only the physical appearance state, but also other parameters should be considered when identifying the form, since they may trigger different classifications of the same substance or mixture.

An example of different classification due to different intrinsic properties of forms is red phosphorus (flammable solid) and white phosphorus (pyrophoric solid) (different allotropes). It is therefore important to evaluate case by case whether available information on the physical properties of the substance and mixture placed on the market⁷ is applicable to the examined form, and whether additional testing should be performed.

The form of a substance or mixture as placed on the market might be such that it is not possible to test it in this form, e.g. if it is in the form of tablets or pellets. In such ~~circumstances~~ cases, the physical hazards of the substance or mixture in its granular/powdered form should must be considered for classification especially if ~~they are~~ it is friable and produce secondary effects due to abrasion or crushing during supply and use. If phase separation does occur, the hazardous properties of the most hazardous phase of the substance or mixture must be ~~communicated~~ determined.

If further testing is required, the choice of the test method should be done after thorough evaluation of its suitability for the substance or mixture, as the properties of the form (e.g. for powders especially size and shape of the particle) may have a significant effect on the test

results.

~~The definitions for gases, liquids and solids are given in Annex I, Part 1 of CLP.~~

~~Annex I, Part 1, 1.0. Definitions~~

~~Gas means a substance which:~~

~~at 50 °C has a vapour pressure greater than 300 kPa (absolute); or
is completely gaseous at 20 °C at a standard pressure of 101,3 kPa;~~

~~Liquid means a substance or mixture which:~~

- ~~(i) at 50 °C has a vapour pressure of not more than 300 kPa (3 bar);~~
- ~~(ii) is not completely gaseous at 20 °C and at a standard pressure of 101,3 kPa; and~~
- ~~(iii) which has a melting point or initial melting point of 20 °C or less at a standard pressure of 101,3 kPa;~~

~~Solid means a substance or mixture which does not meet the definitions of liquid or gas.~~

~~In some cases (i.e. viscous substances or mixtures), a specific melting point cannot be determined. Such a substance or mixture must be regarded as a liquid if either the result of the ASTM D 4359-90 test as amended (standard test method for determining whether a material is a liquid or a solid) indicates 'liquid' or the result of the test for determining fluidity (penetrometer test) prescribed in Section 2.3.4 of Annex A of ADR indicates 'not pasty'.~~

3.1.4. Quality

The determination of data must be based on the methods named in Annex I, Part 2 of CLP. ~~For most hazard classes in Annex I, Part 2 of CLP there is reference made to the UN MTC which gives very detailed descriptions of the test methods. For the classification of flammable gases, oxidising gases and for the determination of the flash point there are references to international standards in Annex I, Part 2 of CLP. Whenever possible, the laboratory should validate the regularly assess its~~ performance ~~of with respect to~~ the methods used e.g. by participating in inter-laboratory testing or by using reference materials. Any deviation from the test procedure or standard should be documented and, if necessary, justified.

The reliability of all test results used for the classification of hazardous substances and mixtures is important and therefore their transparency and comparability must be ensured.

For these purposes, CLP requires in Article 8 the following:

Article 8(5)

~~[...]~~

Where new tests for physical hazards are carried out for the purposes of this Regulation, they shall be carried out, at the latest from 1 January 2014, in compliance with a relevant recognised quality system or by laboratories complying with a relevant recognised standard.

~~[...]~~

In general, the following alternative strategies can be pursued:

1. compliance with the principles of good laboratory practice (GLP) ~~(as formerly required by the DSD)~~;
2. application of EN ISO/IEC 17025 General requirements for the competence of testing and calibration laboratories as amended as a relevant recognised standard;
3. other internationally recognised standards of comparable scope.

It should be noted that GLP is not primarily aimed at physical hazard testing and thus can be applied only to some but not all of the physical hazard test methods. Therefore, in general EN ISO/IEC 17025 is more suitable or preferred over GLP for physical hazard testing.

Any laboratory that carries out physical hazard tests for classification purposes can therefore choose from these alternatives how to fulfil the quality requirements of CLP.

3.2. Explosives

3.2.1. Introduction

The requirements in Chapter 2.1 'Explosives' of Annex I of CLP are identical to those in Chapter 2.1 of GHS up to revision 8⁴. As of revision 9 of the GHS, however, the classification system for explosives has been completely altered. It is expected that this new classification system for explosives will eventually be included in the CLP, upon which this guidance chapter will have to be substantially reviewed.

Up to revision 8 of the GHS, the GHS classification of explosives according to the GHS is almost entirely adopted based on the UN Recommendations on the Transport of Dangerous Goods – Model Regulations (UN RTDG Model Regulations). This classification system, which is currently used in CLP, is appropriate for transport and also for storage of packaged explosives in the transport configuration (e.g. as packaged for transport). In practice, the transport classification normally is simply translated into the corresponding CLP classification without further testing.

The changes in the classification system as of revision 9 of the GHS were introduced to better reflect the explosive behaviour when the substance, mixture or article is not in the transport configuration. While the overall scope of the class of explosives was retained, new categories 1 and 2A-C were introduced to supplement the divisions used for transport and for classification up to revision 8 of the GHS. For explosives which are transported (which should be virtually all commercial explosives), it is quite straight-forward to derive the new GHS classification from the transport classification.

It should be noted that the class of explosives, unlike other hazard classes of the CLP, includes explosive articles. According to Article 4(8) of CLP, these articles should be treated as substances and mixtures in the context of CLP.

The classification of substances, mixtures and articles in the class of explosives and further allocation to a division is a very complex procedure. References to Part I of the UN-MTC and related expertise are necessary.

⁴ The twelfth ATP (Commission Regulation (EU) 2019/521) implements the changes introduced by the sixth (2015) and seventh (2017) revisions of the GHS into the CLP Regulation. No changes on chapter 2.1 were included in GHS revision 8. Consequently, if not specified "GHS" indicates "GHS rev. 7".

3.2.2. Definitions and general considerations for classification of explosives

The following definition is given in CLP for the class of explosives.

Annex I: 2.1.1.1. *The class of explosives comprises*

- (a) *explosive substances and mixtures;*
- (b) *explosive articles, except devices containing explosive substances or mixtures in such quantity or of such a character that their inadvertent or accidental ignition or initiation shall not cause any effect external to the device either by projection, fire, smoke, heat or loud noise; and*
- (c) *substances, mixtures and articles not mentioned in points (a) and (b) above which are manufactured with ~~a~~-the view to producing a practical, explosive or pyrotechnic effect.*

Additional remark related to the applicability of 2.1.1.1 (a) (see also UN RTDG Model Regulations, 2.1.1.1 (a)):

- a substance or mixture which is not itself an explosive (i.e. it does not react out of the condensed phase) but which can form an explosive atmosphere of gas, vapour or dust is not included in this class;
- explosive behaviour ~~related to the thermal decomposition~~ of organic peroxides and of self-reactive substances and mixtures is covered by those specific hazard classes and therefore not included in the hazard class explosives.

In addition the following definitions apply for explosives:

Annex I: 2.1.1.2. For the purposes of this Regulation the following definitions shall apply:

~~{...}~~

An explosive substance or mixture is a solid or liquid substance or mixture of substances which is in itself capable by chemical reaction of producing gas at such a temperature and pressure and at such a speed as to cause damage to the surroundings. Pyrotechnic substances are included even when they do not evolve gases.

A pyrotechnic substance or mixture is a substance or mixture of substances designed to produce an effect by heat, light, sound, gas or smoke or a combination of these as the result of non-detonative self-sustaining exothermic chemical reactions.

An unstable explosive is an explosive which is thermally unstable and/or too sensitive for normal handling, transport and use.

An explosive article is an article containing one or more explosive substances or mixtures.

A pyrotechnic article is an article containing one or more pyrotechnic substances or mixtures.

An intentional explosive is a substance, mixture or article which is manufactured with a view to produce a practical explosive or pyrotechnic effect.

~~Certain physical hazards (due to explosive properties) are altered by dilution, as is the case for desensitized explosives, by inclusion in a mixture or article, packaging or other factors.~~

~~Explosive substances and mixtures wetted with water or alcohols, or diluted with other substances to suppress their explosive properties, may be treated differently to their non-wetted or non-diluted counterparts i.e. different hazard classes may apply, depending on the physical properties of the wetted/diluted substance or mixture.~~

3.2.3. Relation to other physical hazards

~~For safety reasons, s~~Substances, mixtures or articles which have already been classified as Explosives (Class 1 according to the UN RTDG Model Regulations) should normally not be considered for classification in any other physical hazard classes, ~~as. Since~~ the explosion hazard ~~can be considered to be the most is more~~ severe ~~than other of the~~ physical hazards. Furthermore, testing explosives for other physical hazards may pose a severe safety concern for the testing personnel, which must always be avoided. ~~there is no need to further perform classification tests for other potential physical hazards.~~

When considering substances and mixtures for classification within the hazard class explosives, the following checks should be performed with respect to other hazard classes:

- Substances, mixtures and articles that have been manufactured with a view to producing a practical explosive or pyrotechnic effect, are classified as explosives by definition according to 2.1.1.1(c) of Annex I of the CLP. It should be checked whether such a substance or mixture is an unstable explosive.
- Thermally unstable substances or mixtures that are not classified as explosives should be considered for classification as self-reactive substances and mixtures.
- Mixtures of oxidising substances and mixtures with combustible material that are not classified as explosives should be considered for classification as self-reactive substances and mixtures, oxidising liquids or oxidising solids.
- Explosive substances or mixtures may be phlegmatised such that, in the phlegmatised state, they meet the criteria for classification as desensitised explosives, and should be classified as such instead of as explosives.

Due to the complexity of these issues, expert advice should always be sought when dealing with classification of substances and mixtures and articles with potentially explosive properties.

3.2.4. Classification of substances, mixtures or articles as explosives

3.2.4.1. Identification of hazard information

Information on the following types of hazards is relevant for the evaluation of substances, mixtures and articles for the class of explosives:

- sensitivity to shock;
- effects of heating and ignition under confinement;
- thermal stability;
- sensitiveness to impact and friction;
- mass explosion hazard;
- projection hazard;
- fire and radiant heat hazard.

3.2.4.2. Screening procedures and waiving of testing

The screening procedure is described in:

222 CLP, Annex I, Part 2, paragraphs 2.1.4.2 and 2.1.4.3; Appendix 6 of the UN-MTC.

223 The screening procedure may be used for ~~new~~-substances or mixtures which are suspected of
 224 having explosive properties. It ~~is not applicable to should not be used for~~ substances and
 225 mixtures manufactured with the intention of producing a practical explosive or pyrotechnic
 226 effect, ~~as they are classified as explosives by definition~~.

227 Explosive properties are associated with the presence of certain chemical groups in a molecule
 228 which can react to produce very rapid increases in temperature and/or pressure. The screening
 229 procedure is aimed at identifying the presence of such reactive groups and the potential for rapid
 230 energy release.

231 Examples of groups which may indicate explosive properties in organic materials are:

- 232 • C-C unsaturation (e.g. acetylenes, acetylides, 1, 2-dienes);
- 233 • C-Metal, N-Metal (e.g. Grignard reagents, organo-lithium compounds);
- 234 • Contiguous nitrogen atoms (e.g. azides, aliphatic azo compounds, diazonium salts,
 235 hydrazines, sulphonylhydrazides);
- 236 • Contiguous oxygen atoms (e.g. peroxides, ozonides);
- 237 • N-O (e.g. hydroxyl amines, nitrates, nitro compounds, nitroso compounds, N-oxides,
 238 1,2-oxazoles);
- 239 • N-halogen (e.g. chloramines, fluoroamines);
- 240 • O-halogen (e.g. chlorates, perchlorates, iodosyl compounds).


241 A substance or mixture ~~does not have to undergo the acceptance procedure, and is therefore~~
 242 not classified as explosive, ~~if~~:

243 a. ~~when -t~~There are no chemical groups associated with explosive properties present in the
 244 molecule. ~~(see listing above for indications of chemical groups);~~

245 or

246 b. ~~when -t~~The substance or mixture contains chemical groups associated with explosive
 247 properties which include oxygen and the calculated oxygen balance is less than -200;

248 The oxygen balance is calculated for the chemical reaction:



250 Using the formula:

$$251 \quad \text{Oxygen balance} = -1600 \times \frac{[2x + (y/2) - z]}{\text{molecular weight}}$$

252 or

253 ~~c. when -t~~For an organic substance or a homogenous mixture of organic substances,
 254 ~~containscontaining one or more~~ chemical group(s) associated with explosive properties.

255 ~~- -but~~the exothermic decomposition energy is less than 500 J/g ~~or~~;

256 ~~- -and~~the onset of exothermic decomposition is below 500 °C ~~or above, as indicated in~~
 257 ~~CLP, Annex I, Table 2.1.3, see below~~.

(The temperature limit is to prevent the procedure being applied to a large number of organic materials which are not explosive but which will decompose slowly above 500 °C to release more than 500 J/g. Normally, therefore, the measurement is not carried out beyond 500 °C). The exothermic decomposition energy may be determined using a suitable calorimetric technique see section 20.3.3.3⁵ of the UN-MTC.

Annex I: Table 2.1.3 Decision to apply the acceptance procedure for the hazard class 'Explosives' for an organic substance or a homogenous mixture of organic substances

<u>Decomposition energy</u> (J/g)	<u>Decomposition onset temperature</u> (°C)	<u>Apply acceptance procedure?</u> (Yes/No)
<u>< 500</u>	<u>< 500</u>	<u>No</u>
<u>< 500</u>	<u>≥ 500</u>	<u>No</u>
<u>≥ 500</u>	<u>< 500</u>	<u>Yes</u>
<u>≥ 500</u>	<u>≥ 500</u>	<u>No</u>

or

e.d. for mixtures of inorganic oxidising substances with organic material(s), the concentration of the inorganic oxidising substance is:

- less than 15 % by mass, if the oxidising substance is assigned to Categories 1 or 2;
- less than 30 % by mass, if the oxidising substance is assigned to Category 3.

If the screening procedure identifies the substance or mixture to be a potential explosive or if it is a mixture containing any known explosives, the classification (acceptance) procedure for the class of explosives (see Section 3.2.4.5~~2.1.4.5.1~~) has to be applied. If the exothermic decomposition energy of organic materials is less than 800 J/g, a UN gap test is not required, neither according to Series 1 Type (a) nor according to Series 2 Type (a).

3.2.4.3. Classification criteria

The criteria for the classification of explosives are given in the following tables.

Annex I:

2.1.2.1. Substances, mixtures and articles of this class are classified as an unstable explosive on the basis of the flowchart in Figure 2.1.2. The test methods are described in Part I of the UN RTDG, Manual of Tests and Criteria.

2.1.2.2. Substances, mixtures and articles of this class, which are not classified as an unstable explosive, shall be assigned to one of the following six divisions depending on the type of hazard they present:

⁵ https://unece.org/fileadmin/DAM/trans/danger/publi/manual/Rev7/Manual_Rev7_E.pdf

- (a) Division 1.1 Substances, mixtures and articles which have a mass explosion hazard (a mass explosion is one which affects almost the entire quantity present virtually instantaneously);
- (b) Division 1.2 Substances, mixtures and articles which have a projection hazard but not a mass explosion hazard;
- (c) Division 1.3 Substances, mixtures and articles which have a fire hazard and either a minor blast hazard or a minor projection hazard or both, but not a mass explosion hazard:
- (i) combustion of which gives rise to considerable radiant heat; or
 - (ii) which burn one after another, producing minor blast or projection effects or both;
- (d) Division 1.4 Substances, mixtures and articles which present no significant hazard:
- substances, mixtures and articles which present only a small hazard in the event of ignition or initiation. The effects are largely confined to the package and no projection of fragments of appreciable size or range is to be expected. An external fire shall not cause virtually instantaneous explosion of almost the entire contents of the package;
- (e) Division 1.5 Very insensitive substances or mixtures which have a mass explosion hazard:
- substances and mixtures which have a mass explosion hazard but are so insensitive that there is very little probability of initiation or of transition from burning to detonation under normal conditions;
- (f) Division 1.6 Extremely insensitive articles which do not have a mass explosion hazard:
- articles which **predominantly** contain ~~only~~ extremely insensitive substances or mixtures;
 - and which demonstrate a negligible probability of accidental initiation or propagation.

2.1.2.3. Explosives, which are not classified as an unstable explosive, shall be classified in one of the six divisions referred to in section 2.1.2.2 of this Annex based on Test Series 2 to 8 in Part I of the UN RTDG, Manual of Tests and Criteria according to the results of the tests laid down in Table 2.1.1:

Table 2.1.1

Criteria for explosives

Category	Criteria
Unstable explosives or explosives of Divisions 1.1 to 1.6	<p>For explosives of Divisions 1.1 to 1.6, the following are the core set of tests that need to be performed:</p> <p>Explosibility: according to UN Test Series 2 (section 12 of the UN RTDG, Manual of Tests and Criteria). Intentional explosives ⁽¹⁾ shall not be subject to UN Test Series 2.</p>

	<p><i>Sensitiveness: according to UN Test Series 3 (section 13 of the UN RTDG, Manual of Tests and Criteria).</i></p> <p><i>Thermal stability: according to UN Test 3(c) (sub-section 13.6.1 of the UN RTDG, Manual of Tests and Criteria).</i></p> <p><i>Further tests are necessary to allocate the correct Division.</i></p>
	<p><i>(¹) This comprises substances, mixtures and articles which are manufactured with a view to producing a practical, explosive or pyrotechnic effect.</i></p>

~~Where the test is conducted in the package form and the packaging is changed, a further test must be conducted where it is considered that the change in packaging will affect the outcome of the test.~~

~~Classification tests must be performed on the substance or mixture as supplied. If the same chemical is to be presented in a physical form different from that which was tested and which is considered likely to materially alter its performance in a classification test, the substance or mixture must also be tested in the new form.~~

3.2.4.4. Testing and evaluation of hazard information

Where test data are available, these must be evaluated against the set criteria for classification.

When the screening procedure indicates that a substance or mixture may possess explosive properties, a cautious approach when performing the tests is necessary to ensure safe handling.

For information on the test procedures see the following Section 3.2.4.5 where the individual test series are described in context with the respective decision logic.

The test procedures for the classification of explosives are described in detail in the Part I of the UN-MTC.

Where the test is conducted in the packaged form and the packaging is changed, a further test must be conducted where it is considered that the change in packaging will affect the outcome of the test.

Classification tests must be performed on the substance or mixture as supplied. If the same chemical is to be presented in a physical form different from that which was tested and which is considered likely to materially alter its performance in a classification test, the substance or mixture must also be tested in the new form.

3.2.4.5. Classification procedure and decision logics

Any substance, mixture or article having, or suspected of having, explosives characteristics must be considered for classification in the hazard class of explosives. Substances, mixtures and articles classified in this hazard class must be assigned to the appropriate division or must be classified as unstable explosive.

It should be noted that, as a consequence to the substantial changes to the explosives classification as GHS revision 9 (see the introduction to this chapter, section 3.2.1), the UN-MTC was consequently amended. These amendments are included in Amendment 1 to the 7:th revised edition of the UN-MTC. In essence, the amendments mean that all references to "unstable explosive" and to "too dangerous for transport" in the UN-MTC have been replaced by "too sensitive to assign a division". A substance, mixture or article that is considered "too sensitive to assign a division" according to the UN-MTC (as amended) is classified as an unstable

311 explosive according to CLP.

312 The classification process is divided into two stages, the acceptance procedure and the
313 assignment procedure.

314 In the acceptance procedure, intrinsic explosive properties of a substance, mixture or article are
315 determined through tests of its sensitivity, stability and explosion effects. If the substance,
316 mixture or article is not characterised as unstable explosive and is provisionally accepted into
317 the class of explosives, it is then necessary to ascertain the correct division by applying the
318 assignment procedure. The further subdivision into compatibility groups A to S is described in
319 detail in the UN-~~MTC~~~~RTDG Model Regulations~~, Section 2.1.2. The compatibility groups and their
320 recommended combination identify types of explosives which are deemed to be compatible, e.g.
321 for combined storage or transportation and can therefore be used to distinguish technical
322 requirements (especially) in these sectors. However, assignment of compatibility groups is not
323 part of the classification system according to CLP.

324 The tests for acceptance and the further tests to determine the correct division are grouped into
325 eight test series. Classification procedures, test methods and criteria are described in detail in
326 Part I of the UN-MTC.

❗ NOTE: The person responsible for the classification of explosives should be experienced in this field and be familiar with the criteria for classification.


327 **3.2.4.5.1. Acceptance procedure**

328 The acceptance procedure is used to determine whether or not a substance, mixture or article
329 is a candidate for the class of explosives, ~~and whether it-~~or~~~~ is an unstable explosive ~~(which is~~
330 ~~not allowed for transport)~~.

331 The test methods used for deciding on provisional acceptance into the class of explosives are
332 grouped into four series, ~~Test Series numbered~~-1 to 4 (see CLP Annex I, Figure 2.1.2 reported
333 below).

Annex I: Figure 2.1.2

Procedure for provisional acceptance of a substance, mixture or article in the class of explosives (Class 1 for transport)

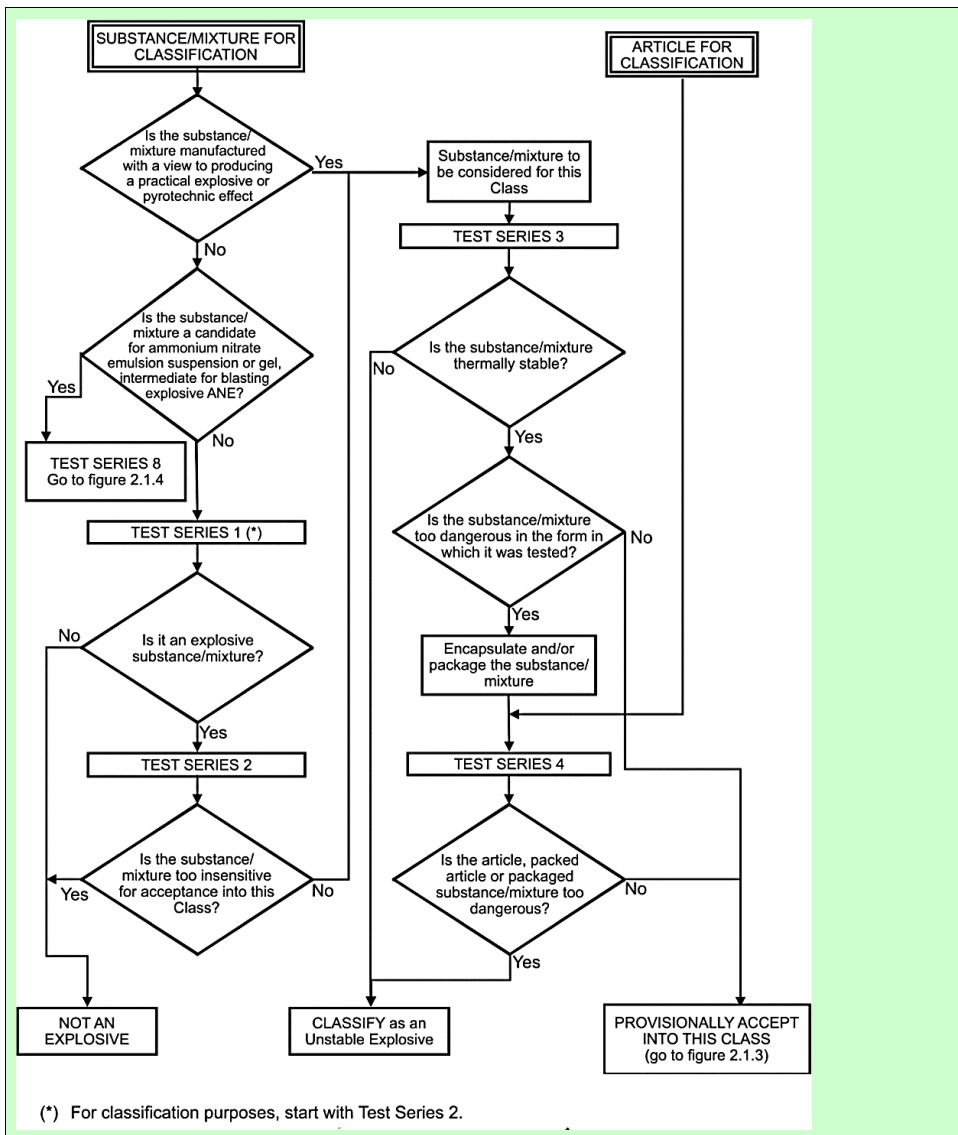

334

335 The numbering of Test Series 1 to 4 relates to the sequence of assessing the results rather than
 336 the order in which the tests should be conducted. **It may be important for the safety of test**
 337 **personnel that certain tests, using small amounts of material, be conducted first**
 338 **before proceeding to experiment with larger quantities.**

339 Starting the testing procedure with Test Series 3 is highly recommended, because these tests
 340 involve relatively small sample sizes, which reduces the risk to test personnel. While Test Series

1 may be waived for the purpose of classification, it can provide useful information on the properties of the substance or mixture.

Test Series 1

Within Test Series 1 the question 'Is it an explosive substance / mixture?' is answered on the basis of the results of three types of tests to assess possible explosive effects. The question is answered 'Yes' if a '+' is obtained in any of the three types of tests. If the answer is 'No', the substance / mixture is rejected from this class; it is not an explosive. Under certain conditions the Test Type 1 (a) can be replaced by certain tests of Test Series F, see UN-MTC, Section 11.3.5.

The three types of test used are (recommended test is indicated within brackets):

Type 1 (a): a shock test with defined booster and confinement to determine the ability of the substance to propagate a detonation (UN Gap test, zero gap);

Type 1 (b): a test to determine the effect of heating under confinement (Koenen test); and

Type 1 (c): a test to determine the effect of ignition under confinement (time/pressure test).

Test Series 2

Series 2 tests are used to answer the question 'Is the substance / mixture too insensitive for acceptance into this Class?'. In general, the basic apparatus and method used is the same as that for Test Series 1 but with less stringent criteria, e.g. in the case of gap tests, the gap used is greater than zero. The question is answered 'No' if a '+' is obtained in any of the three types of test. If the answer is 'Yes', the substance / mixture is rejected from this class; it is not an explosive. Under certain conditions Test Type 2 (a) can be replaced by certain tests of Test Series F, see UN-MTC, Section 12.3.4.

The following three types of test are used (recommended test is indicated within brackets):

Type 2 (a): a shock test with defined initiation system and confinement to determine sensitivity to shock (UN gap test) (with a defined gap e.g. 50 mm);

Type 2 (b): a test to determine the effect of heating under confinement (Koenen test); and

Type 2 (c): a test to determine the effect of ignition under confinement (Time/pressure test).

If the substance or mixture is manufactured with a view to produce a practical explosive or pyrotechnic effect, it is unnecessary to conduct Test Series 1 and 2 for purposes of classification.

Test Series 3

As stated above it is recommended to carry out Test Series 3 before Test Series 1 and 2 for safety reasons due to the small sample amount needed. It is also recommended to carry out Test Series 3 even if negative results have been obtained in Test Series 1 and/or 2 because only Test Series 3 gives information about the thermal stability and the sensitivity to mechanical stimuli (impact and friction).

Test Series 3 is used to answer the questions 'Is the **substance / mixture** thermally stable?'

and 'Is the substance / mixture too dangerous ~~for transport~~ in the form in which it was tested ~~(and therefore unstable in that form)~~?⁶ This involves tests for determining the sensitiveness of the substance or mixture to mechanical stimuli (impact and friction), and to heat and flame.

The following four types of tests are used (recommended test is indicated within brackets):

Type 3 (a): a falling weight test to determine sensitiveness to impact (BAM Fallhammer);

Type 3 (b): a friction; or impacted friction test to determine sensitiveness to friction (BAM friction apparatus);

Type 3 (c): an elevated temperature test to determine thermal stability (thermal stability test at 75 °C); and

Type 3 (d): an ignition test to determine the response of a substance or mixture to fire (small scale burning test).

The first question is answered 'No' if a '+' is obtained in Test ~~I~~type 3_(c). Then the substance / mixture is considered as thermally unstable and either classified as an unstable explosive or as a self-reactive substance or mixture.

The second question is answered 'Yes' if a '+' is obtained in any of the Test ~~types-Types~~ 3_(a), 3_(b) or 3_(d). If a '+' is obtained, the substance / mixture may be encapsulated or packaged to reduce its sensitiveness to external stimuli or is classified as an unstable explosive. Furthermore, the explosive may be desensitized in order to suppress/reduce its explosive properties in which case the classification procedure has to be restarted.

Test Series 4

Series 4 tests are intended to answer the question 'Is the **article**, packaged article or packaged substance or mixture too dangerous ~~to be transported~~ ~~(and therefore an unstable explosive)~~?⁷. Conditions which may occur during supply and use include high /low temperature and high relative humidity, vibration, bumping and dropping.

The two types of test to be carried out are:

Type 4 (a): a test of thermal stability for articles; and

Type 4 (b): a test to determine the hazard from dropping.

The question is answered 'Yes' if a '+' is obtained in either Test ~~type-Type~~ 4 (a) or 4 (b) and the substance or mixture or article is classified as an unstable explosive.

It is important to note that a substance / mixture which fails Test Series 2 (i.e. it is sensitive enough for acceptance into the class of explosives) may still, if properly packaged, leave the class of explosives provided that it is not designed to have an explosive effect and does not exhibit any explosive hazard in Test Series 6 of the assignment procedure (see example for musk xylene). Such an exclusion from the class of explosives is restricted to the specific type and size of package tested.

⁶ Through Amendment 1 to the UN-MTC rev. 7 the latter question has been changed to "Is the substance / mixture too sensitive to assign a division?", see the introduction to section 3.2.4.5.

⁷ Through Amendment 1 to the UN-MTC rev. 7 this question has been changed to "Is the article, packaged article or packaged substance or mixture too sensitive to assign a division", see the introduction to section 3.2.4.5.

Especially for substances / mixtures, which have explosive properties according to Test Series 1 and/or 2 but can leave the class of explosives after Test Series 6 due to ~~the type of proper~~ packaging, ~~it is necessary to communicate~~ these properties should be communicated in the Safety Data Sheet (SDS). ~~Furthermore, the results from Test types 3 (a) and 3 (b) should be documented in the SDS when they meet the criteria of EU test method A.14 in Regulation (EC) No 440/2008 (these are substances with a sensitiveness to impact, determined by UN Test Series 3 (a) (ii) of 40 J or less and/or a sensitiveness to friction, determined by Test Series 3 (b) (i) of 360 N or less).~~

3.2.4.5.2. Assignment procedure to a division


The assignment procedure to one of six divisions, depending on the type of hazard they present, applies to all substances, mixtures and/or articles that are candidates for the class of explosives. A substance, mixture or article must be assigned to the division which corresponds to the results of the tests to which the substance, mixture or article, as presented ~~offered~~ for supply and use, has been subjected. Other test results, and data gathered from accidents which have occurred, may also be taken into account.


The test methods used for assignment to a division are grouped into three series – ~~Test Series numbered~~ 5 to 7 – designed to provide the information necessary to answer the questions in Figure 2.1.3 in CLP.

NOTE: The person responsible for the classification of explosives should be experienced in this field and be familiar with the criteria for classification.

Annex I: Figure 2.1.3

Procedure for assignment to a division in the class of explosives (Class 1 for transport)

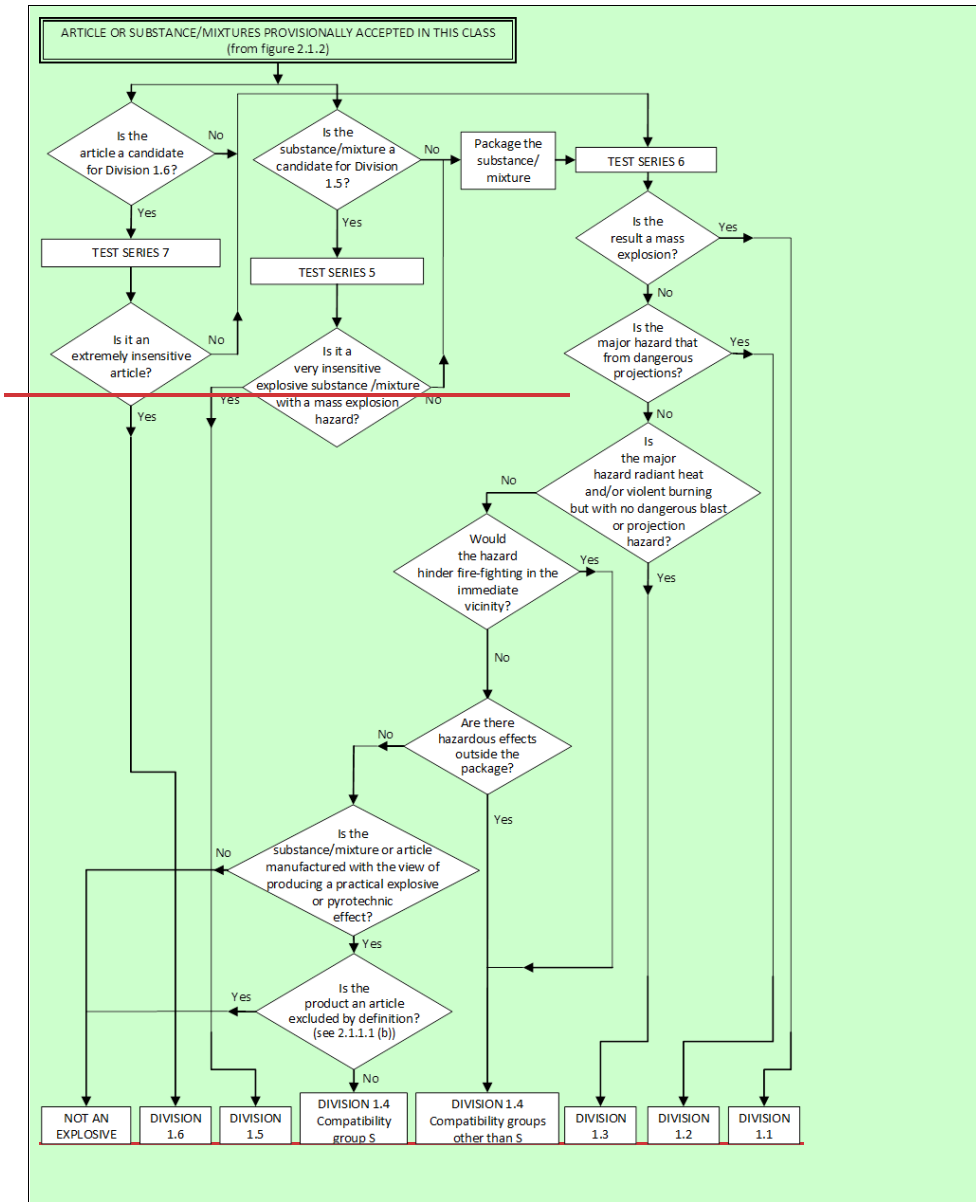

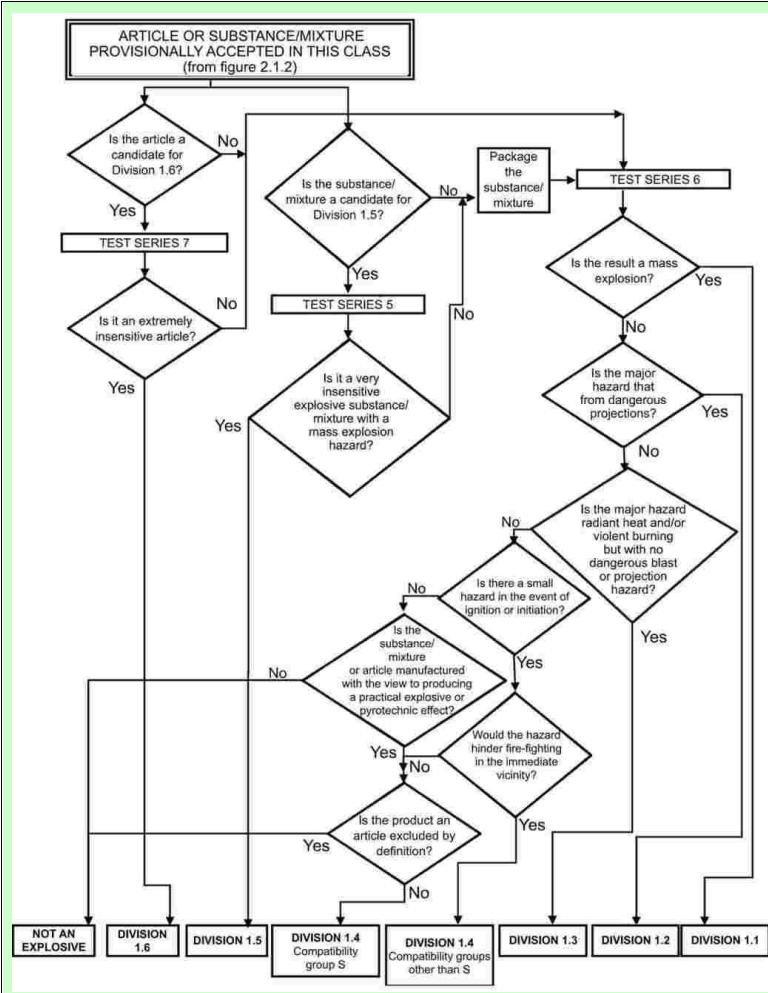

Test Series 5

Test Series 5 is only carried out for explosive substances/mixtures which are very insensitive and therefore candidates for division 1.5. Typical substances/mixtures are blasting agents such as ANFO, slurries, and emulsion explosives.

The results from three types of series 5 tests are used to answer the question 'Is it a very insensitive explosive substance/mixture with a mass explosion hazard?'.

The test types are (recommended test is indicated within brackets):

Type 5 (a): a shock test to determine the sensitivity to intense mechanical stimulus (cap sensitivity test);

Type 5 (b): thermal tests to determine the tendency of transition from deflagration to detonation (French or USA DDT test); and

Type 5 (c): a test to determine if a substance, when in large quantities, explodes when subjected to a large fire.

The question is answered 'No' if a '+' is obtained in any of the three test types. A candidate for Division 1.5 should pass one test of each type.

Test Series 6

The results from four types of series 6 tests are used to determine which division, amongst Divisions 1.1, 1.2, 1.3 and 1.4, corresponds most closely to the behaviour of the substance, mixture or article to be classified if a load is involved in a fire resulting from internal or external sources or an explosion from internal sources. The results are also necessary to assess whether a substance, mixture or article can be assigned to Compatibility Group S of Division 1.4 and whether or not it ~~should may~~ be excluded from this class. Test Series 6 should be applied to packages of substances, mixtures or articles in the condition and form in which they are offered for supply and use.

The four test types are (recommended test is indicated within brackets):

Type 6 (a): a test on a single package to determine if there is mass explosion of the contents (single package test);


Type 6 (b): a test on packages of an explosive substance, mixture or explosive articles, or non-packaged explosive articles, to determine whether an explosion is propagated from one package to another or from a non-packaged article to another (stack test); ~~and~~


Type 6 (c): a test on packages of an explosive substance, mixture or explosive articles, or non-packaged explosive articles, to determine whether there is a mass explosion or a hazard from dangerous projections, radiant heat and/or violent burning or any other dangerous effect when involved in a fire (bonfire test);

Type 6 (d): a test on an unconfined package of explosive articles to which special provision 347 of Chapter 3.3 of the UN RTDG Model Regulations applies, to determine if there are hazardous effects outside the package arising from accidental ignition or initiation of the contents.

Test ~~I~~types 6 (a), 6 (b), 6 (c) and 6 (d) are performed in alphabetical order. However, it is not always necessary to conduct tests of all types. Test ~~type-Type~~ 6 (a) may be waived if explosive articles are carried without packaging or when the package contains only one article.

- 479 Test ~~type~~Type 6 (b) may be waived if in each ~~type-Type~~ 6 (a) test:
- 480 • the exterior of the package is undamaged by internal detonation and/or ignition; or
 - 481 • the contents of the package fail to explode, or explode as feebly as would exclude
 - 482 propagation of the explosive effect from one package to another in ~~Test~~ ~~type~~ Type 6 (b).
- 483 Test ~~type~~ Type 6 (c) may be waived if, in a ~~type~~ Type 6 (b) test, there is practically instantaneous
- 484 explosion of virtually the total contents of the stack. In such cases the product is assigned to
- 485 Division 1.1.
- 486 Test ~~type~~ Type 6 (d) is a test used to determine whether a ~~Division 1.4 compatibility group~~ S
- 487 classification is appropriate and is only used if Special Provision 347 of Chapter 3.3 of the UN
- 488 RTDG Model Regulations applies. The results of ~~Test~~ ~~series-Series~~ 6 (c) and 6 (d) indicate if
- 489 ~~division 1.4 compatibility group~~ S is appropriate, otherwise the classification is ~~Division 1.4~~
- 490 ~~compatibility group~~ other than S.
- 491 If a substance or mixture gives a '—' result (no propagation of detonation) in the Series 1
- 492 ~~type~~ (a) test, the ~~6~~ (a) test with a detonator may be waived.
- 493 If a substance gives a '—' result (no or slow deflagration) in a Series 2 ~~type-Type~~ (c) test, the
- 494 6 (a) test with an igniter may be waived.
- 495 Test Series 7
- 496 Test Series 7 aims at military explosives (Extremely Insensitive Substance: EIS or article
- 497 containing an EIS) and is generally not relevant for explosives for civil use. Therefore the
- 498 individual tests are not described here. If needed, they can be found in the UN--MTC, Part I,
- 499 Section 17.
- 500 Test Series 8
- 501 The question whether a candidate for ammonium nitrate emulsion or suspension or gel,
- 502 intermediate for blasting explosives (ANE) is insensitive enough for classification as oxidising
- 503 is answered by ~~Test~~ ~~Series 8-tests~~.
- 504 According to CLP, there are three test types ~~are for ANE~~ (recommended test is indicated
- 505 within brackets):
- 506 Type 8 (a): a test to determine the thermal stability (Thermal Stability Test for ANE);
- 507 Type 8 (b): a shock test to determine sensitivity to intense shock (ANE gap test); ~~and~~
- 508 Type 8 (c): a test to determine the effect of heating under confinement (Koenen test).
- 509 Test Series 8 is used to establish whether an ~~ammonium-nitrate-emulsion-or-suspension-or~~
- 510 ~~gel, intermediate for blasting explosives (ANE)~~ may leave the class of explosives or not. ~~ANE:s~~
- 511 ~~that are allowed to leave the class of explosives are classified as oxidising liquids or oxidising~~
- 512 ~~solids (depending on their viscosity). Substances or mixtures failing any of the tests must be~~
- 513 ~~classified as explosives (Division 1.1. or 1.5) or as an unstable explosive in accordance with~~
- 514 ~~CLP Annex I, Figure 2.1.4. If they pass all three tests they are classified as an oxidising liquid~~
- 515 ~~or solid.~~
- 516 In the UN-MTC there is an additional classification Test Type 8 (e) (the Minimum Burning
- 517 Pressure test), which has not yet been introduced into the CLP classification scheme.
- 518 Test Type 8 (d) of the UN-MTC is not used for classification and has no relevance for CLP.

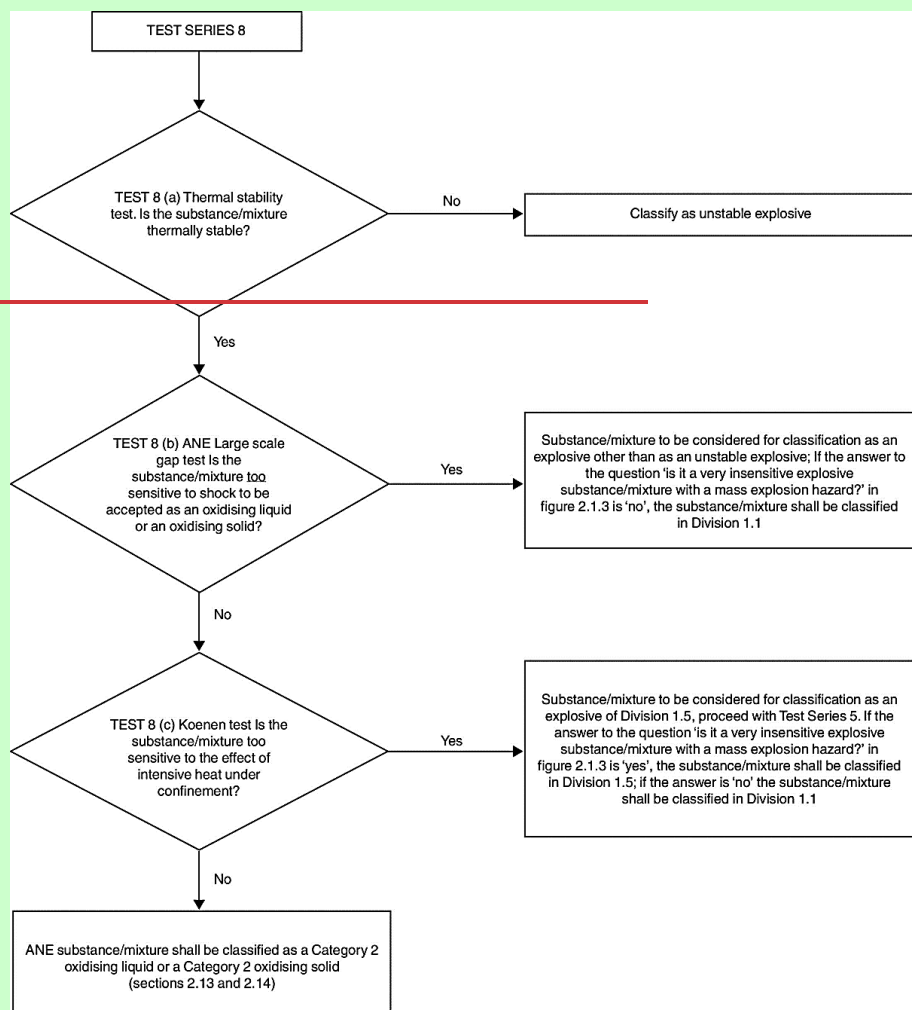

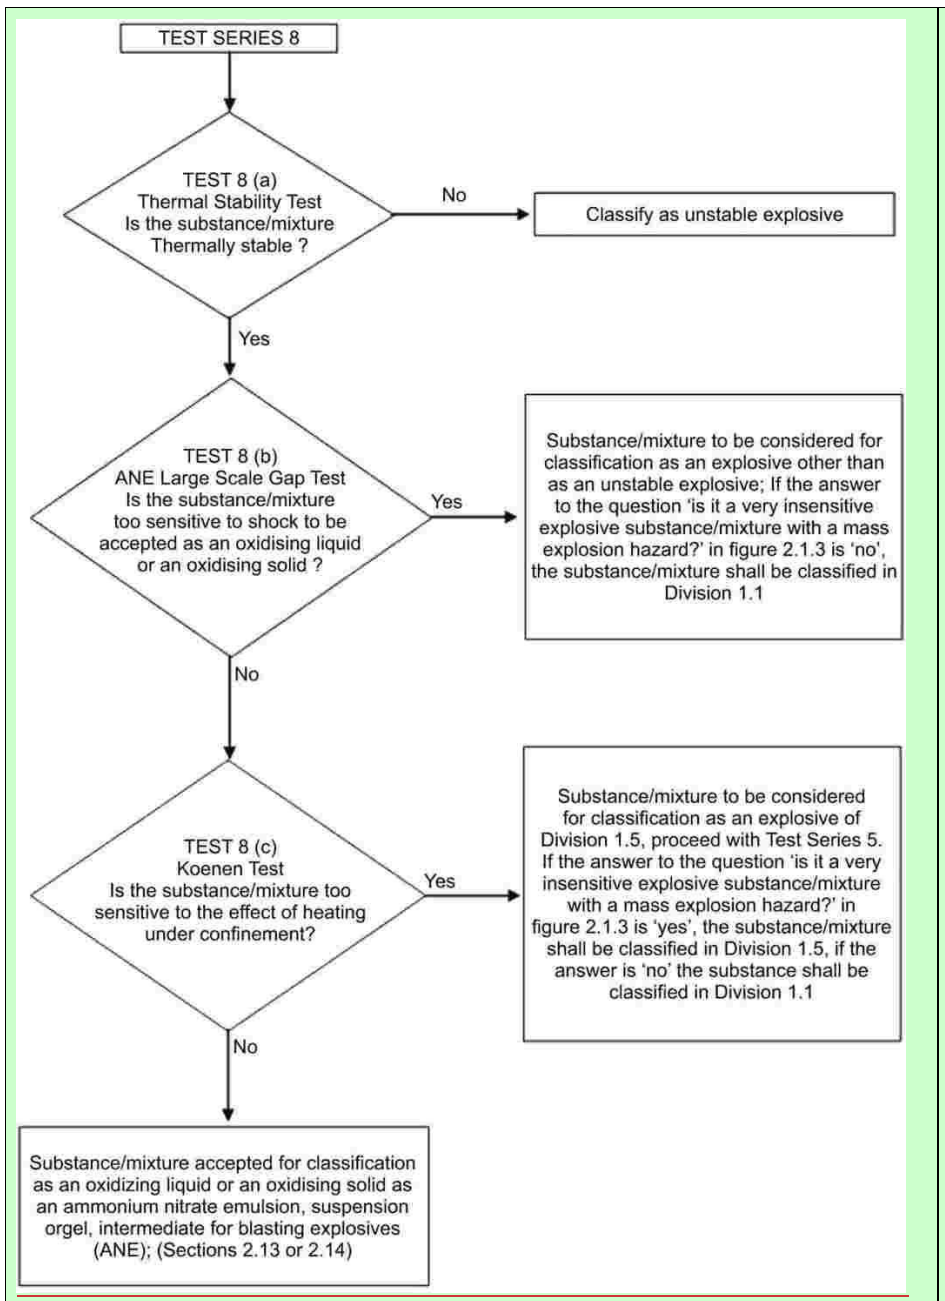


Annex I: Figure 2.1.4**Procedure for the classification of ammonium nitrate emulsion, suspension or gel (ANE)**



3.2.5. Hazard communication for explosives

3.2.5.1. Pictograms, signal words, hazard statements and precautionary statements⁸

Annex I: Table 2.1.2
Label elements for explosives

Classification	Unstable Explosive	Division 1.1	Division 1.2	Division 1.3	Division 1.4	Division 1.5	Division 1.6
GHS Pictograms							
Signal Word	Danger	Danger	Danger	Danger	Warning	Danger	No signal word
Hazard Statement	H200: Unstable Explosive	H201: Explosive; mass explosion hazard	H202: Explosive; severe projection hazard	H203: Explosive; fire, blast or projection hazard	H204: Fire or projection hazard	H205: May mass explode in fire	No hazard statement
Pre-cautionary Statement Prevention	P201 P250 P280	P210 P230 P234 P240 P250 P280	P210 P230 P234 P240 P250 P280	P210 P230 P234 P240 P250 P280	P210 P234 P240 P250 P280	P210 P230 P234 P240 P250 P280	No pre-cautionary statement
Pre-cautionary Statement Response	P370 + P372 + P380 + P373	P370 + P372 + P380 + P373	P370 + P372 + P380 + P373	P370 + P372 + P380 + P373	P370 + P372 + P380 + P373	P370 + P372 + P380 + P373	No pre-cautionary statement
Pre-cautionary Statement Storage	P401	P401	P401	P401	P401	P401	No pre-cautionary statement
Pre-cautionary Statement Disposal	P501	P501	P501	P501	P501	P501	No pre-cautionary statement

The wording of the Precautionary Statements is found in CLP Annex IV, Part 2.

The intrinsic explosive properties of substances and mixtures regarding their stability and sensitivity are only investigated within Test Series 1, 2 and 3 during the acceptance procedure. Subsequent tests for the assignment to the Divisions 1.1, 1.2, 1.3 and 1.4 (Test Series 6) are carried out with the packaged substances, mixtures or articles. The type of packaging may significantly influence the test outcome.

Consequently, there are some deficiencies in the hazard communication of the GHS for unpacked

⁸ The combination statement P370+P372+P380+P373 applies to Division 1.4 except for compatibility group S in transport packaging, whereas the combination statement P370+P380+P375 applies to Division 1.4 compatibility group S in transport packaging.

or repacked explosive substances and mixtures, especially for substances and mixtures, which are provisionally accepted in the class of explosives but are later rejected from this class due to their packaging in the assignment procedure (see CLP Annex I, Figure 2.1.1 and Figure 2.1.3 and Section 3.2.4.5~~2.1.4.5.1~~ of this guidance). These substances and mixtures have explosive properties but there might be no hazard communication about these properties due to the subsequent classification in a hazard class other than the class of explosives. Musk xylene is an example which illustrates this issue (see Section [Error! Reference source not found.](#)). The results of Test Series 6 for musk xylene in the specified packaging lead to the exclusion of this substance from the hazard class of explosives. But musk xylene on its own (unpacked) shows explosive properties due to heating under confinement (Koenen test). Also repacking of the substance in a packaging other than the tested one can result in a completely different outcome of Test Series 6.

~~This issue is not sufficiently clarified under GHS, but should be kept in mind by everyone applying the CLP criteria. It is due to this dependence on the transport configuration that the GHS classification of explosives has been thoroughly changed as of GHS rev. 9, see the introduction to this chapter (section 3.2.1).~~

3.2.5.2. Additional labelling provisions

3.2.5.2.1. Packaging dependence

Explosives are normally classified in their transport packaging. The packaging itself may be crucial for the classification. This is clear from the Figure 2.1.3 in Section 3.2.4.5, especially when it comes to Test Series 6. The assignment of an explosive substance or mixture to a particular Division within the hazard class of explosives is thus only valid for the substance and mixture in the packaging in which it was tested, which is usually the transport packaging. Because of the package-dependence of the classification, paragraph 2.1.2.4 of the Annex I to the CLP prescribes:

Annex I: 2.1.2.4. *If explosives are unpackaged or repacked in packaging other than the original or similar packaging, they shall be retested.*

Further, according to NOTE 1 to Table 2.1.2 in Section 2.1.3 of Annex I to CLP, unpackaged explosives or explosives repacked in packaging other than the original or similar packaging must have the following label elements:

Annex I: 2.1.3. Hazard communication

[...]

NOTE 1: *Unpackaged explosives or explosives repackaged in packaging other than the original or similar packaging shall include the following label elements:*

(a) *the pictogram: exploding bomb;*

(b) *the signal word: "Danger"; and*

I the hazard statement: 'explosive; mass explosion hazard'

Unless the hazard is shown to correspond to one of the hazard categories in Table 2.1.2, in which case the corresponding symbol, signal word and/or the hazard statement shall be assigned.

Normally, if explosives are unpackaged or repacked in packaging other than the original or similar packaging the classification procedure needs to be performed again in order to determine which Division the explosive belongs to in the new packaging. The label elements prescribed in

NOTE 1 to Table 2.1.2, as quoted above, are the same as those of Division 1.1 and in practice this Division constitutes the most severe classification of a repackaged explosive. (Please note that Table 2.1.2 foresees also the hazard category 'Unstable explosive', which is assigned on the basis of the intrinsic properties of a substance or mixture via Test Series 3 and it is not package dependent). Therefore, the CLP allows labelling of a repackaged explosive with labelling corresponding to Division 1.1 instead of retesting. This, however, overestimates the hazardous properties unless the explosive in fact belongs to Division 1.1.

Many explosives are supplied in inner packages which are placed together in an outer package and where the entity as a whole, i.e. the combination of inner and outer packages, constitutes the transport packaging. According to the UN RTDG Model Regulations and the modal transport regulations (ADR, RID, I and IMDG Code, ICAO TI) the classification tests are performed in the transport packaging. Under Article 33(1) of CLP where the hazard pictograms(s) required by CLP relate to the same hazard as in the rules for the transport of dangerous goods, the respective CLP hazard pictogram(s) do not need to appear on the outer packaging.

The classification in accordance with rules on the transport of dangerous goods is almost entirely identical to the corresponding classification procedure used in CLP and hence the CLP classification will automatically be known for the transport packaging. However, the CLP classification for the inner package alone strictly speaking is not known to the manufacturer, importer or downstream user as this will not have been derived from the classification of the transport packaging. On the other hand, it is normally not practicable to perform the required tests on the inner packages. Therefore, normally the same classification as for the transport packaging may be assumed for the inner packages. The labelling requirements for the inner packages are those foreseen in Table 2.1.2 of Annex I to the CLP. However, the following exceptions apply:

- Transport packages in which the packaging is designed such that mass explosion is prevented by the packaging, e.g. by arranging the individual inner packages crosswise (so that they are not neighbouring each other) and by separating them with specified material. This is especially the case when packing instruction P101 according to section 4.1.5 of the ADR applies. In this case the inner package should be labelled in accordance with Note 1 to Table 2.1.2 of Annex I to the CLP (i.e. as Division 1.1 unless tested otherwise).
- Packages in which explosives of different divisions are contained (for such cases see especially the mixed packing provisions MP 20 to MP 24 in section 4.1.10 of the ADR).
- Furthermore, they do not apply if the packaging is changed, as stated in Note 1 to Table 2.1.2 of Annex I to the CLP.

3.2.5.2.2. Supplemental hazard information

~~Some R-phrases under DSD are not covered by hazard classes in the current GHS. They are included as supplemental hazard statements in Part 1 of Annex II to CLP. The following EU hazard statements are important in connection with explosive properties:~~

~~Risk phrases carried through from the DSD and DPD, but which are not yet included in GHS, are codified as EU hazard statements or "EUH". For explosive properties, the EUH044 hazard statement should be considered.~~

~~Annex II: 1.1.1. EUH001 'Explosive when dry'~~

~~For explosive substances and mixtures as referred to in chapter 2.1 of part 2 of Annex I, placed on the market wetted with water or alcohols or diluted with other substances to suppress their explosives properties.~~

~~EUH001 must be assigned to explosives which are wetted, diluted, dissolved or suspended with a phlegmatizer in order to reduce or suppress their explosive properties (desensitized explosives in the sense of the foreseen new hazard class for desensitized explosives) and which do not meet the criteria of the hazard class of explosives.~~

Annex II:

1.1.46. EUH044 – 'Risk of explosion if heated under confinement'

For substances and mixtures not in themselves classified as explosive in accordance with section 2.1 of part 2 of Annex I, but which may nevertheless display explosive properties in practice if heated under sufficient confinement. In particular, substances which decompose explosively if heated in a steel drum do not show this effect if heated in less-strong containers.

Some substances and mixtures which may react explosively if heated under confinement are not covered adequately by the classification system. This may e.g. be the case for:

- substances or mixtures which are exempted from the class of explosives based on their packaging and according to results of the Test Series 6;
- substances or mixtures with a SADT of more than 75 °C for a 50 kg package which therefore cannot be classified as self-reactive.

~~EUH044 must be assigned to such substances or mixtures, in order to make the user aware of these properties.~~

3.2.5.3. Further communication requirements

According to Note 2 to Table 2.1.2, explosive properties of certain substances and mixtures which are exempted from classification as explosives must be communicated to the user via the SDS (when one is required).

Annex I: 2.1.3. Hazard communication

[...]

NOTE 2: Substances and mixtures, as supplied, with a positive result in Test Series 2 in Part I, Section 12, of the UN RTDG, Manual of Tests and Criteria, which are exempted from classification as explosives (based on a negative result in Test Series 6 in Part I, Section 16 of the UN RTDG, Manual of Tests and Criteria,) still have explosive properties. The user shall be informed of these intrinsic explosive properties because they have to be considered for handling – especially if the substance or mixture is removed from its packaging or is repackaged – and for storage. For this reason, the explosive properties of the substance or mixture shall be communicated in Section 2 (Hazards identification) and Section 9 (Physical and chemical properties) of the Safety Data Sheet and other sections of the Safety Data Sheet, as appropriate.

3.2.6. Relation to transport classification

Division 1.1 – 1.6 within Class 1 of the UN RTDG Model Regulations covers explosive substances, mixtures and articles. Normally, the transport classification in accordance with the UN RTDG Model Regulations and the modal transport regulations (ADR, RID, ADN and IMDG Code, ICAO TI) can be used one-to-one when deriving the CLP classification for explosives, ~~which are packaged in authorised~~ Although, strictly speaking, this classification is only valid for the

transport ~~packaging configuration~~, no re-classification or re-testing is normally required to derive the corresponding classification according to CLP. See Annex VII of this guidance for additional information on transport classification in relation to CLP classification.

For the use of other packaging or for unpacked substances and mixtures the additional labelling provisions (see Section 3.2.5.2) have to be observed or re-testing is necessary.

3.2.7. Example of classification for explosives

Examples are given below for the classification of substances. Equivalent information would be needed for mixtures.

3.2.7.1. Example of substances and mixtures fulfilling the classification criteria

a. RESULTS FROM APPLICATION OF THE ACCEPTANCE PROCEDURE

Step	Test	Conclusion	Rationale
0. General data:			
0.1 Name of the substance / mixture: Hexanitrostilbene			
1. Is the substance / mixture a candidate for ammonium nitrate emulsion, suspension or gel, intermediate for blasting explosive (ANE)?		No	
2. Is the substance / mixture manufactured with the view to producing a practical explosive or pyrotechnic effect?		Yes	
3. Test Series 3			
3.1 Thermal stability:	75 °C / 48 hour test (test 3(c))	Result: '—', thermally stable	
3.2 Impact sensitivity:	BAM Fallhammer test (test 3(a)(ii))	Result: Limiting impact energy 5 J	'—', not too dangerous in form tested
3.3 Friction sensitivity:	BAM friction test (test 3(b)(i))	Result: Limiting load > 240 N	'—', not too dangerous in form tested
4. Is the substance / mixture thermally stable?		Yes	
5. Is the substance / mixture too dangerous in the form in which it was tested?		No	
6. Conclusion:		PROVISIONALLY ACCEPT INTO THIS CLASS	
10.1 Exit:		Apply the assignment	

Step	Test	Conclusion	Rationale
		procedure	

b. RESULTS FROM APPLICATION OF THE ASSIGNMENT PROCEDURE

Step	Test	Conclusion	Rationale
1. Is the substance a candidate for Division 1.5?		No Result: Package the substance	
2. Test Series 6			
2.1 Effect of initiation in the package:	Test 6(a) with detonator	Result: detonation, crater	
2.2 Effect of propagation:	Type 6(b) with detonator	Result: detonation of the whole stack of packages, crater	
2.4 Effect of fire engulfment:	Test 6(c) may be waived because of the result of the 6(b) test.		
3. Is the result a mass explosion?		Yes	
4. Conclusion:		Assignment to Division 1.1	

3.2.7.2. Example of substances and mixtures not fulfilling the classification criteria

This example is taken from the UN-MTC, Part I, Section 10.5.2, Figure 10.57 (a).

c. RESULTS FROM APPLICATION OF THE ACCEPTANCE PROCEDURE

Step	Test	Conclusion	Rationale
0. General data:			
0.1 Name of the substance / mixture: 5-tert-butyl-2,4,6-trinitro-m-xylene (musk xylene)			
1. Is the substance / mixture a candidate for ammonium nitrate emulsion, suspension or gel, intermediate for blasting explosive ANE?		No	
2. Is the substance / mixture manufactured with the view to producing a practical explosive or pyrotechnic effect?		No	

Step	Test	Conclusion	Rationale
3. Test Series 1			
3.1 Propagation of Detonation:	UN gap test (test 1(a))	Result: '+', propagation of detonation	Fragmentation type 'F' '+', shows some explosive effects on heating under confinement
3.2 Effect of heating under confinement:	Koenen test (test 1(b))	Result: Limiting diameter 12.0 mm	
3.3 Effect of ignition under confinement:	Time/pressure test (test 1(c)(i))	Result: '-', no effect on ignition under confinement	
4. Is it an explosive substance / mixture?		Yes	
5. Test Series 2			
5.1 Sensitivity to shock:	UN gap test (test 2(a))	Result: '-', not sensitive to shock	Fragmentation type 'F' '+', violent effect on heating under confinement.
5.2 Effect of heating under confinement:	Koenen test (test 2(b))	Result: Limiting diameter 12.0 mm	
5.3 Effect of ignition under confinement:	Time/pressure test (test 2(c)(i))	Result: '-', no effect on ignition under confinement	
6. Is the substance / mixture too insensitive for acceptance into this class?		No	
Conclusion:		Substance to be considered for this class	
7. Test Series 3			
7.1 Thermal stability:	75 °C/48 hour test (test 3(c))	Result: '-', thermally stable	'-', not too dangerous in form tested
7.2 Impact sensitivity:	BAM Fallhammer test (test 3(a)(ii))	Result: Limiting impact energy 25 J", not too dangerous in form tested.	
7.3 Friction sensitivity:	BAM friction test (test 3(b)(i))	Result: Limiting load > 360 N	
8. Is the substance / mixture thermally stable?		Yes	

Step	Test	Conclusion	Rationale
9. Is the substance / mixture too dangerous in the form in which it was tested?		No	
10. Conclusion: 10.1 Exit		PROVISIONALLY ACCEPT INTO THIS CLASS Apply the assignment procedure The explosive properties shall be communicated in the safety data sheet in accordance with section 2.1.5.3 above.	

d. RESULTS FROM APPLICATION OF THE ASSIGNMENT PROCEDURE

Step	Test	Conclusion	Rationale
1. Is the substance a candidate for Division 1.5?		No Result: Package the substance	
2. Test Series 6			
2.1 Effect of initiation in the package:	Test 6(a) with detonator	Result: Only localised decomposition around detonator	No significant reaction
2.2 Effect of ignition in the package:	Test 6(a) with igniter	Result: Only localised decomposition around igniter	No significant reaction
2.3 Effect of propagation:	Type 6(b) test not required as no effect outside package between packages in 6(a) test		
2.4 Effect of fire engulfment:	Test 6	Result: Only slow burning with black smoke occurred.	No effects which would hinder fire fighting
3. Is the result a mass explosion?		No	
4. Is the major hazard that from dangerous projections?		No	
5. Is the major hazard radiant heat and/or violent burning but with no dangerous blast or projection hazard?		No	
6. Is there nevertheless a small hazard in the event of ignition or initiation?		No	
7. Is the substance manufactured with the view to producing a practical explosive or pyrotechnic effect?		No	
8. Conclusion:		NOT AN EXPLOSIVE	
8.1 Exit		Consider for another class (e.g. flammable solid)	

649 **3.3. Flammable Gases** ~~(including chemically unstable gases)~~

650 **3.3.1. Introduction**

651 The criteria for 'Flammable gases' ~~(including chemically unstable gases)~~ are found in Annex I,
652 Section 2.2 of CLP and ~~are identical to~~ were adopted from those in Chapter 2.2 of GHS⁴.

653 **3.3.2. Definitions and general considerations for classification of flammable**
654 **gases** ~~(including chemically unstable gases)~~

Annex I: 2.2.1. Definitions

2.2.1.1 Flammable gas means a gas or gas mixture having a flammable range with air at 20 °C and a standard pressure of 101.3 kPa.

2.2.1.2. A pyrophoric gas means a flammable gas that is liable to ignite spontaneously in air at a temperature of 54 °C or below.

2.2.1.3. A chemically unstable gas means a flammable gas that is able to explode even in the absence of air or oxygen.

~~2.2.1.2. A chemically unstable gas means a flammable gas that is able to explode even in the absence of air or oxygen.~~

655 The flammable range of a flammable gas is ~~the range~~ the range between its lower explosion limit
656 (LEL) and its upper explosion limit (UEL). The term 'explosion limit' is synonymous to
657 'flammability limit', sometimes used outside the European Union, defined between the 'lower
658 flammability limit' (LFL) in air and the 'upper flammability limit' (UFL) in air. In technical
659 literature, the terms 'lower explosion limit' (LEL) and 'upper explosion limit' (UEL) are often used
660 instead of the LFL and UFL, respectively.

661 ~~The hazard class of flammable gases also covers chemically unstable gases as defined above.~~

662 **3.3.3. Relation to other physical hazards**

Annex I: 2.2.2. Classification criteria

[...]

~~NOTE 1:~~ Aerosols shall not be classified as flammable gases; see Section 2.3.

NOTE 2: In the absence of data allowing classification into Category 1B, a flammable gas that meets the criteria for Category 1A is classified by default in Category 1A.

663 For flammable gases that are ~~packaged-contained~~ in aerosol dispensers see 3.4.2.3 Aerosols. If
664 classified as aerosols, they do not have to be classified as flammable gases in addition.

665 Generally, simultaneous classification of gases as flammable and gases under pressure is
666 applicable.

667 Generally, simultaneous classification of gases as flammable and oxidizing is not applicable
668 when placed on the market and supposed to be transported.

669 When a gas mixture contains flammable and oxidizing gases, it can be classified as one of the
670 following three categories:

- Gases under pressure, if the oxygen content is less than or equal to 23.5 % and the content of the flammable gases is below the maximum concentration of flammable gas for the mixture to be non-flammable or below the lower explosion limit.
- Oxidizing, if the oxygen content is more than 23.5 % and the content of the flammable gases below the lower explosion limit.
- Flammable, if the content of the flammable gases is more than the maximum concentration of flammable gas for the mixture to be non-flammable and more than the lower explosion limit.

3.3.4. Classification of substances, mixtures or articles as flammable gases (including chemically unstable gases)

3.3.4.1. Identification of hazard information

Many gaseous substances are classified as flammable gases in Annex VI of CLP and more gases are classified as flammable gases in the UN RTDG Model Regulations.

If the classification of flammable gases given in Annex VI of CLP is using the former category 1 instead of the new categories 1A, 1B, the gas should primarily be classified as 1A, unless there is data available justifying 1B. Please refer to Note 2 on CLP Annex I, Table 2.2.1; see also below in 3.3.4.3.

Please note that, in EIGA document 169 applies the new criteria for a number of flammable gases based on data for lower explosion limits. However, these new classifications should not be applied if they differ from the classification derived based on NOTE 2 in Section 3.3.2⁹.

For gases that are not ~~classified as flammable gases listed~~ in Annex VI of CLP nor in the UN RTDG Model Regulations, there is ample scientific literature giving the flammability range for most gases (e.g. ~~IEC 60079-20-1~~ ISO 10156 Gas cylinders — Gases and gas mixtures — Determination of fire potential and oxidizing ability for the selection of cylinder valve outlets or EN/ ISO/IEC 80079-20-1, Explosive atmospheres – Part 20-1: Material characteristics for gas and vapour classification – Test methods and data as amended).

Information on pyrophoric gases classified as pyrophoric can be found in chapter 4.2 of EIGA document 169.

~~In the case a gas or gas mixture needs to be tested for flammability, a recognised international standard must be used such as the EN 1039, Determination of explosion limits of gases and vapours as amended or ISO 10156, Gases and gas mixtures — Determination of fire potential and oxidising ability for the selection of cylinder valves outlets as amended.~~

Information on a number of chemically unstable gases can be found in the UN-MTC, Section 35. Tables 35.1 and 35.2 within UN-MTC, Section 35.3.2.1 contain information on a number of chemically unstable gases together with their classification and Category.

In order to distinguish between the category 1A and 1B CLP allows the use of lower explosion limit data or of fundamental burning velocity data. For information on fundamental burning velocity see ISO 817 as amended "Refrigerants-Designation and safety classification, Annex C:- Method of test for burning velocity measurement of flammable gases".

If no or insufficient information is available, screening and waiving possibilities should be checked. Depending on the results, testing might be necessary, see section 3.3.4.4.~~If information on other gases than the ones mentioned in the above tables is needed a test method~~

⁹ If there is divergence between the classification in EIGA document 169 and the classification based on Note 2, a CLH dossier can be submitted to modify the classification in Annex VI, see ECHA guidance on the preparation of CLH dossier.

~~for determination of chemical instability of gases and gas mixtures is described in UN-MTC, Section 35. However, it should be noted that this test method is not applicable to liquefied gas mixtures. In case the gaseous phase above a liquefied gas mixture may become chemically unstable after withdrawal, this should be communicated via the SDS.~~

3.3.4.2. Screening procedures and waiving of testing

~~Gas mixtures are often prepared on demand and thus there are thousands of numerous gas mixtures containing flammable gases on the market. However, and there are a limited number of test reports for the flammability of gas mixtures in the scientific literature. Tests to determine the flammability range are time consuming and expensive for gas mixtures which are often prepared on demand. In most of the cases, the formulator of the gas mixture will use a calculation method as described in ISO 10156 as amended (see Section 3.3.4.2.2.2.4.4) to determine if the mixture is flammable or not may be applied).~~

If the calculations in accordance with ISO 10156 as amended show that a gas mixture is not flammable it is also not classified as ~~pyrophoric~~chemically unstable and therefore it is not necessary to carry out the tests for determining chemical instability for classification purposes. Waiving possibilities for pyrophoric gases and chemical instability are given in CLP Annex I section 2.2.4.3 and 2.2.4.2, respectively. See also waiving possibilities for chemically unstable gases and gas mixtures given in UN-MTC, Section 35.

Annex I: 2.2.4 Additional Classification Considerations

2.2.4.3. The classification procedure for pyrophoric gases need not be applied when experience in production or handling shows that the substance does not ignite spontaneously on coming into contact with air at a temperature of 54 °C or below. Flammable gas mixtures, which have not been tested for pyrophoricity and contain more than one percent pyrophoric components, shall be classified as a pyrophoric gas. Expert judgement on the properties and physical hazards of pyrophoric gases and their mixtures shall be used in assessing the need for classification of flammable gas mixtures containing one percent or less pyrophoric components. In this case, testing need only be considered if expert judgement indicates a need for additional data to support the classification process.

2.2.4.4. Chemical instability shall be determined in accordance with the method described in Part III of the UN RTDG, Manual of Tests and Criteria. If the calculations in accordance with ISO 10156 as amended show that a gas mixture is not flammable it is not necessary to carry out the tests for determining chemical instability for classification purposes.

Expert judgement should be applied to decide whether a flammable gas or gas mixture is a candidate for classification as chemically unstable in order to avoid unnecessary testing of gases where there is no doubt that they are stable. Functional groups indicating chemical instability in gases are triple bonds, adjacent or conjugated double-bonds, halogenated double-bonds and strained rings.

Gas mixtures containing only one chemically unstable gas are not considered as chemically unstable and therefore do not have to be tested for classification purposes if the concentration of the chemically unstable gas is below the higher of the following generic concentration limits:

- a. the lower explosion limit (LEL) of the chemically unstable gas; or
- b. 3 mole%.

Furthermore, for some gases there are also specific concentration limits available and these are indicated in the tables 35.1 and 35.2 within UN-MTC, Section 35.3.2.1.

3.3.4.3. Classification criteria

The criteria for the classification of flammable gases ~~(including chemically unstable gases)~~ are given in the following tables:

Annex I: ~~2.2.2.~~ Table 2.2.1

Criteria for categorisation of flammable gases

Category		Criteria
<u>1A</u>	<u>Flammable gas</u> ¹	Gases, which at 20 °C and a standard pressure of 101.3 kPa <u>are</u> : (a) are ignitable when in a mixture of 13 % or less by volume in air; or (b) have a flammable range with air of at least 12 percentage points regardless of the lower flammable limit <u>unless data show they meet the criteria for Category 1B-</u>
	<u>Pyrophoric gas</u> ²	<u>Flammable gases that ignite spontaneously in air at a temperature of 54 °C or below</u> Gases, other than those of Category 1, which, at 20 °C and a standard pressure of 101.3 kPa, have a flammable range while mixed in air.
	<u>Chemically unstable gas</u> ^{Category}	<u>A</u> <u>Flammable gases which are chemically unstable at 20 °C and a standard pressure of 101.3 kPa</u> Criteria
		<u>B</u> <u>Flammable gases which are chemically unstable at a temperature greater than 20 °C and/or a pressure greater than 101.3 kPa</u>
<u>1B</u>	<u>Flammable gas</u> ^A	<u>Gases which meet the flammability criteria for Category 1A, but which are not pyrophoric, nor chemically unstable, and which have at least either:</u> (a) <u>a lower flammability limit of more than 6 % by volume in air; or</u> (b) <u>a fundamental burning velocity of less than 10 cm/s;</u> Flammable gases which are chemically unstable at 20 °C and a pressure of 101.3 kPa.
<u>2</u>	<u>Flammable gas</u> ^B	<u>Gases, other than those of Category 1A or 1B, which, at 20 °C and a standard pressure of 101.3 kPa, have a flammable range while mixed in air.</u> Flammable gases which are chemically unstable at a temperature greater than 20 °C and/or a pressure greater than 101.3 kPa.

[...]

NOTE 2: In the absence of data allowing classification into Category 1B, a flammable gas that meets the criteria for Category 1A is classified by default in Category 1A.

NOTE 3: Spontaneous ignition for pyrophoric gases is not always immediate, and there may be a delay.

NOTE 4: In the absence of data on its pyrophoricity, a flammable gas mixture shall be classified as a pyrophoric gas if it contains more than 1 % (by volume) of pyrophoric component(s).

3.3.4.4. Testing and evaluation of hazard information

ISO 10156 as amended describes a test method and a calculation method for the classification of flammable gas mixtures. The test method may be used in all cases, but must be used when the calculation method cannot be applied.

The calculation method applies to gas mixtures and can be applied when the T_{ci} for all flammable components and the K_k for all inert components are available. These are listed for a number of gases in ISO 10156 as amended. In the absence of T_{ci} value for a flammable gas, the value of the LFL-LEL can be used. ~~In the absence of a K_k value for a non-flammable and non oxidizing gas with three atoms or more, a K_k value of 1.5 shall be used and ISO 10156 proposes the value of 1.5 where no K_k value is listed.~~ The calculation method described in ISO 10156 as amended uses the criterion that a gas mixture is considered non-flammable in air if:

$$\sum_{i=1}^n \frac{A'_i}{T_{ci}} \leq 1$$

where:

$$A'_i = \frac{A_i}{\sum_{i=1}^n A_i + \sum_{k=1}^p K_k B_k}$$

and where:

A'_i is the equivalent content of the i :th flammable gas in the mixture, in %

T_{ci} is the maximum content of flammable gas i which, when mixed with nitrogen, is not flammable in air, in %

A_i is the molar fraction of the i :th flammable gas in the mixture, in %

B_k is the molar fraction of the k :th inert gas in the mixture, in %

K_k is the coefficient of equivalency of the inert gas k relative to nitrogen

n is the number of flammable gases in the mixture

p is the number of inert gases in the mixture

The principle of the calculation method is the following:

Where a gas mixture contains an inert diluent other than nitrogen, the volume of this diluent is adjusted to the equivalent volume of nitrogen using the equivalency coefficient for the inert gas K_k . From this the equivalent contents A'_i are then derived through Equation 3.3.4.4.b, which

should be viewed as the corresponding concentration of the flammable gases if nitrogen was the only inert gas present in the mixture. In Equation 3.3.4.4.a the equivalent contents are then compared to the constants T_{ci} , which have been experimentally found using nitrogen as the (only) inert gas.

It should be noted that ISO 10156 uses molar fractions in some of its equations. For most gases under normal (i.e. non-extreme) conditions, however, the volume fraction can be assumed to be equal to the molar fraction, which is the same as assuming ideal gas behaviour for all gases in the mixture. Furthermore, although normally a fraction is a number ranging from 0 to 1, in this case it is easier to express it as percentage, i.e. the fraction multiplied by 100.

The calculation methods described in ISO 10156 as amended also allow to determine only if the mixture is flammable or not. It does not determine a flammability range, a lower explosion limit and therefore the calculation method cannot determine if the mixture is classified as flammable Category 1A or Category 1B2.

For mixtures of flammable gases Le Chatelier's formula is commonly used to predict lower explosion limits. The formula can be applied for mixtures being flammable but not for mixtures being potentially explosive. Le Chatelier's formula cannot be used for calculation of upper explosion limits. Furthermore it cannot be used for partial halogenated hydrocarbons or oxidizers other than air.

According to this formula the lower flammability limit (L_M) of a mixture of flammable gases is given by the following equation:

Equation 3.3.4.4.c
$$\frac{100}{L_M} = \frac{A_1}{L_1} + \frac{A_2}{L_2} + \frac{A_3}{L_3} + \dots + \frac{A_n}{L_n}$$

Where L is the lower flammability limit in % and A is the molar fraction in % of the flammable gas in a mixture of n flammable gases.

For mixtures of flammable gases with inert gases other than nitrogen and air equation 2.2.4.4.d takes into account the nitrogen equivalent (K_k) of inert gases other than nitrogen.

Equation 3.3.4.4.d
$$L_M = \frac{100}{\sum_{i=1}^n A_i \frac{1}{L_i}}$$

where L_i is given by

Equation 2.2.4.4.e
$$L_i' = \frac{\left(100 - L_M - (1-K) \cdot \frac{\sum_{k=1}^p B_k}{\sum_{i=1}^n A_i} \cdot L_M\right)}{(100 - L_M)} \cdot L_i$$

where

K is the average of K_k values of the inert gases weighted according to its molar fractions.

The calculation methods described in ISO 10156 as amended does not determine a flammability range and therefore the calculation method cannot determine if the mixture is flammable Category 1A/1B or Category 2. Therefore, to be on the safe side, mixtures determined to be flammable according to the calculation method are classified flammable gas; Category 1A or 1B. The gas mixture can be classified as flammable gas Category 2 only if it contains flammable gases classified as flammable gas Category 2. If, however, there is a need to distinguish between Category 1 and Category 2 in these cases, the lower and the upper explosion limits have to can be determined by using a suitable test method (e.g. EN 1839 or ISO 10156 as amended).

813 For mixtures containing both flammable and oxidising components, special calculation methods
814 are described in ISO 10156 as amended.

815 ~~In the case a gas or gas mixture needs to be tested for its flammability, a recognised~~
816 ~~international standard must be used. CLP explicitly refers to such as the EN 1839, Determination~~
817 ~~of explosion limits of gases and vapours as amended or ISO 10156, Gases and gas mixtures -~~
818 ~~Determination of fire potential and oxidising ability for the selection of cylinder valves outlets as~~
819 ~~amended. Instead of the test apparatus according to ISO 10156 as amended, the test apparatus~~
820 ~~for the tube method according to clause 4.2 of EN 1839, Determination of explosion limits of~~
821 ~~gases and vapours as amended may be used.~~

822 Gases ~~or compressed~~(including gas mixtures) that are classified as flammable have to be
823 considered for classification as **pyrophoric and/or** chemically unstable in addition. If the screening
824 procedures described in Section 3.3.4.2 are not conclusive, the gas or gas mixture has to be
825 tested.

826 ~~Gases do not have to be tested for pyrophoricity for classification purposes (see above in 2.2.4.2)~~
827 ~~but if tested, the test must be carried out at 54 °C in accordance with either ISO/EN/IEC 60079-~~
828 ~~20-1 ed1.0 (2010-01) 'Explosive atmospheres – Part 20-1: Material characteristics for gas and~~
829 ~~vapour classification – Test methods and data' or DIN 51794 'Determining the ignition~~
830 ~~temperature of petroleum products'.~~

831 The test method **for chemical instability of gases** is described in UN-MTC, Section 35. It uses the
832 same equipment as the test method for oxidising gases according to ISO 10156 as amended
833 and therefore could be applied by laboratories that also carry out the tests for oxidising gases.


834 ~~If information on other gases or gas mixtures than the ones mentioned in the above tables~~
835 ~~referred to in the last paragraph of 3.3.4.2 is needed, testing should be performed. a test method~~
836 ~~for determination of chemical instability of gases and gas mixtures is described in UN-MTC,~~
837 ~~Section 35. However, it should be noted that this test method described in UN-MTC, Section~~
838 ~~35, does not cover gas mixtures where the components can react dangerously with each other,~~
839 ~~e.g. flammable and oxidising gases. It is not applicable to liquefied gas mixtures because, in~~
840 ~~case the gaseous phase above a liquefied gas mixture may generally has a different composition~~
841 ~~than the liquefied phase (except if the mixture is azeotrope and at its azeotropic point) so that~~
842 ~~the gas may become chemically unstable only after withdrawal. This should be communicated~~
843 ~~via the SDS.~~


844 3.3.4.5. Decision logics


845 Classification of flammable gases is laid down in the following flow-charts which are applicable
846 according to CLP.

⚠ NOTE: The person responsible for the classification of flammable gases ~~(including~~
~~chemically unstable gases)~~ should be experienced in this field and be familiar with the
criteria for classification.

847 Decision logic for flammable gases

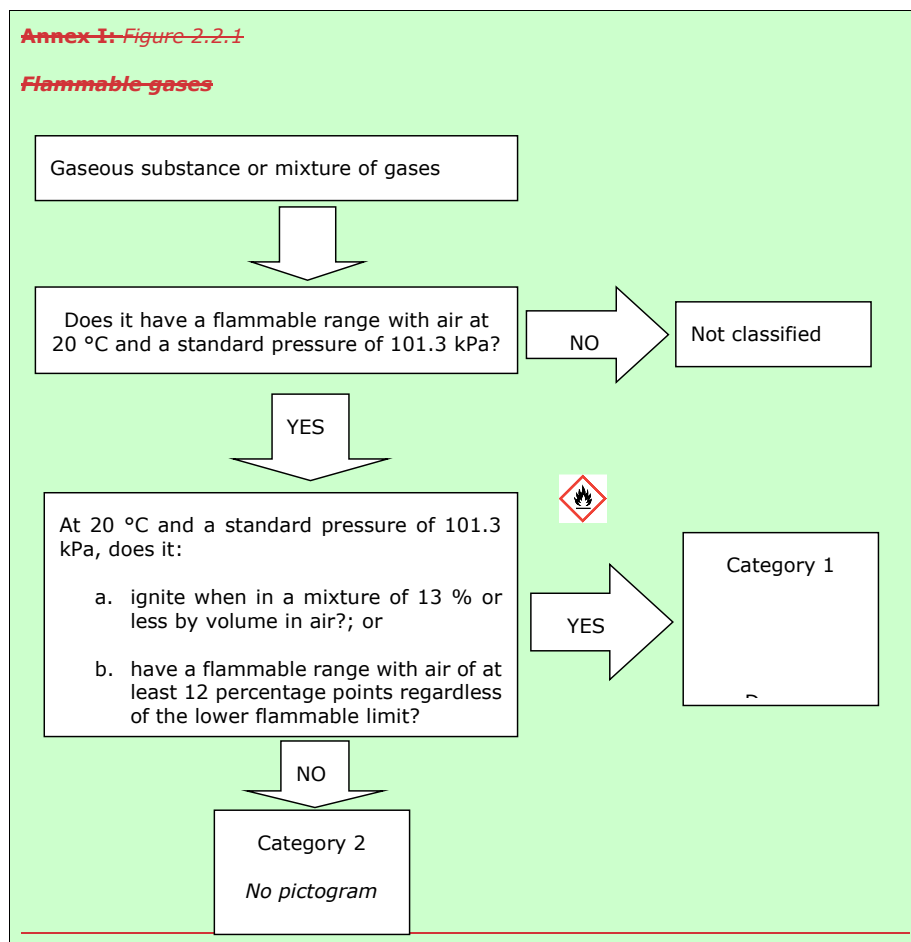
Annex I: Figure 2.2.1**Flammable gases**

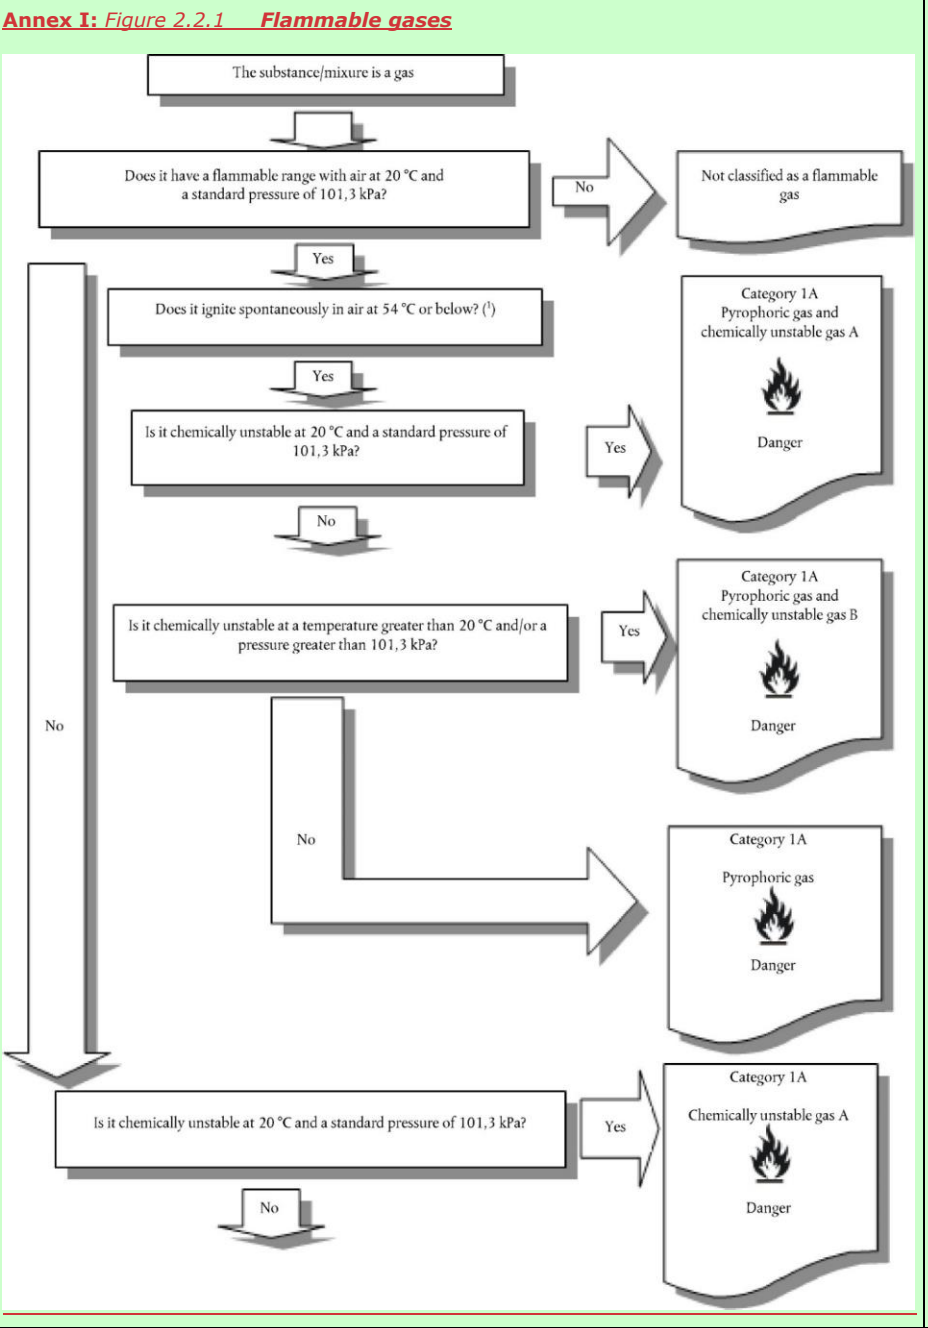

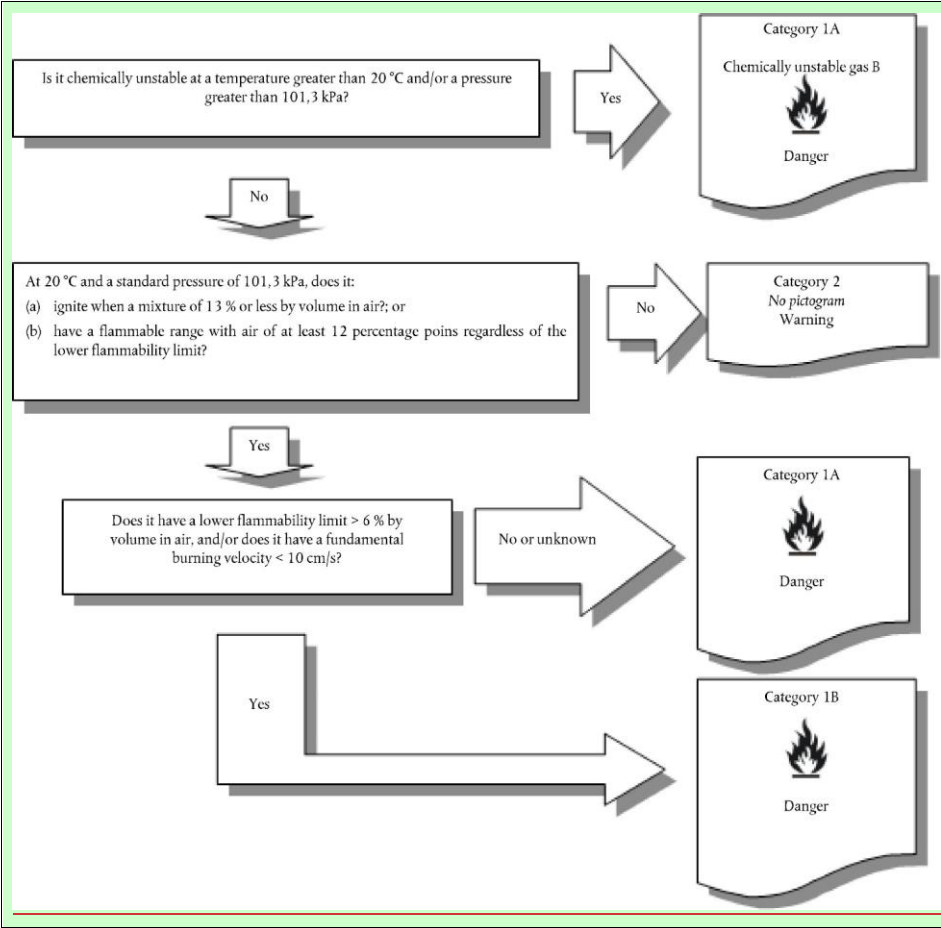

850
\$51 **3.3.4.5.1. Decision logic for chemically unstable gases**

Annex I: Figure 2.2.2
Chemically unstable gases

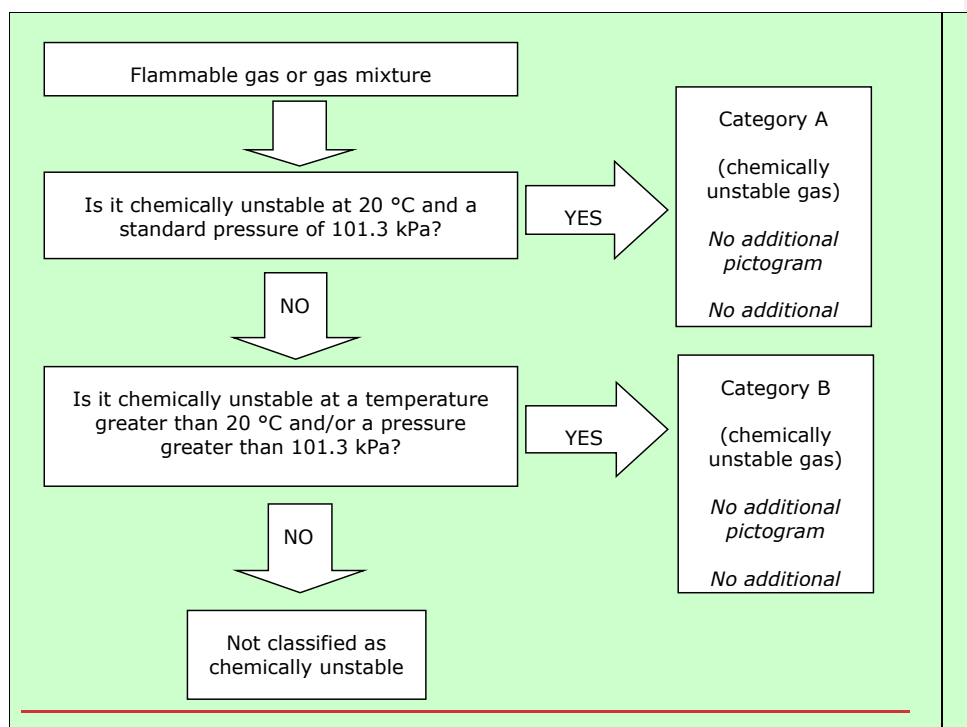





3.3.5. Hazard communication for flammable gases ~~(including chemically unstable gases)~~

3.3.5.1. Pictograms, signal words, hazard statements and precautionary statements

Annex I: 2.2.3. Table 2.2.3

Label elements for flammable gases ~~(including chemically unstable gases)~~

Classification	<u>Category 1A</u> <u>Flammable gas</u>	<u>Gases categorised as 1A meeting pyrophoric or unstable gas A/B criteria</u> <u>Chemically unstable gas</u>		<u>Category 1B</u>	<u>Category 2</u>
	<u>Category 1</u>	<u>Pyrophoric gas</u> <u>Category 2</u>	<u>Chemically unstable gas</u>		
			Category A	Category B	
GHS Pictogram		 <u>No additional pictogram</u>	 <u>No additional pictogram</u>	 <u>No additional pictogram</u>	<u>No pictogram</u>
Signal Word	<u>Danger</u>	<u>Danger</u> <u>Warning</u>	<u>Danger</u> <u>No additional signal word</u>	<u>Danger</u> <u>No additional signal word</u>	<u>Danger</u> <u>Warning</u>
Hazard Statement	<u>H220: Extremely flammable gas</u>	<u>H220: Extremely flammable gas</u> <u>H221: Flammable gas</u> <u>H232: May ignite spontaneously if exposed to air</u>	<u>H220: Extremely flammable gas</u> <u>Additional hazard statement</u> <u>H230: May react explosively even in the absence of air</u>	<u>Additional hazard statement</u> <u>H220: Extremely flammable gas</u> <u>H231: May react explosively even in the absence of air at elevated pressure and/or temperature</u>	<u>H221: Flammable gas</u> <u>H221: Flammable gas</u>

Precautionary Statement Prevention	P210	P210 <u>P222</u> <u>P280</u>	P202 <u>P210</u>	P202 <u>P210</u>	<u>P210</u>	<u>P210</u>	
Precautionary Statement Response	P377 P381	P377 P381	<u>P377</u> <u>P381</u>	<u>P377</u> <u>P381</u>	<u>P377</u> <u>P381</u>	<u>P377</u> <u>P381</u>	
Precautionary Statement Storage	P403	P403	<u>P403</u>	<u>P403</u>	<u>P403</u>	<u>P403</u>	
Precautionary Statement Disposal							

Annex I: 2.2.3 Hazard Communication

[...]

If a flammable gas or gas mixture is classified as pyrophoric and/or chemically unstable, then all relevant classification(s) shall be communicated on the safety data sheet as specified in Annex II of Regulation (EC) No 1907/2006, and the relevant hazard communication elements included on the label.

[...]

856 The wording of the Precautionary Statements is found in CLP Annex IV, Part 2.

857 **3.3.6. Relation to transport classification**

858 The criteria for flammable gases ~~Category~~ Categories 1A and 1B do not completely correspond
859 to the criteria that are in use for classifying flammable gases in the UN RTDG Model Regulations.
860 Consequently all gases listed as flammable in the UN RTDG Model Regulations and in the modal
861 transport regulations (ADR, RID, ADN and IMDG Code, ICAO TI) must be classified as Flam. Gas
862 1A (H220) or 1B (H221); H220. Gases are not classified for chemical instability or for
863 pyrophoricity in the UN RTDG Model Regulations. See Annex VII for additional information on
864 transport classification in relation to CLP classification.

865 **3.3.7. Example of classification for flammable gases**

EXAMPLE MIXTURE: 2 % (H₂) + 6 % (CH₄) + 27 % (~~Ar~~Ar) + 65 % (~~He~~He)

Calculation steps:

Example for the classification of a gas mixture containing flammable gases based on the calculations of ISO 10156 as amended.

Step 1: Assign the gases and state their molar fractions, assuming the molar fractions are equal to the volume fractions (ideal gas behaviour for all gases).

H₂ is flammable gas 1,
Press. Gas (Comp), H280;
Flam. Gas 1A, H220 yielding $A_1 = 2$ mole %

CH₄ is flammable gas 2,
Press. Gas (Comp), H280;
Flam. Gas 1A, H220 yielding $A_2 = 6$ mole %

Ar is inert gas 1,
Press. Gas (Comp), H280; yielding $B_1 = 27$ mole %

He is inert gas 2,
Press. Gas (Comp), H280 yielding $B_2 = 65$ mole %

$n = 2$ since there are two flammable gases in the mixture

$p = 2$ since there are two inert gases in the mixture

Step 2: Assessment of pyrophoricity and chemical instability

As no substance of the mixture is either pyrophoric or chemically unstable the mixture is not pyrophoric and not chemical unstable.

Step 23: Look up the values of T_{ci} , ~~and~~ K_k and L_i in ISO 10156 as amended.

$T_{c1} =$	5.5 mole %
$T_{c2} =$	8.7 mole %
$L_{11} =$	4.0 mole %
$L_{12} =$	4.4 mole %
$K_1 =$	0.55
$K_2 =$	0.9

Step 34: Calculate the equivalent gas contents A'_i for the flammable gases according to Equation 3.3.4.4.b

$$A'_1 = \frac{2}{(2+6)+(0.55 \times 27 + 0.9 \times 65)} = 2.46 \text{ mole \%}$$

$$A'_2 = \frac{6}{(2+6)+(0.55 \times 27 + 0.9 \times 65)} = 7.38 \text{ mole \%}$$

Step 45: Calculate the flammability of the gas mixture according to Equation 3.3.4.4.a

$$\sum_{i=1}^2 \frac{A'_i}{T_{ci}} = \frac{A'_1}{T_{c1}} + \frac{A'_2}{T_{c2}} = \frac{2.46}{5.5} + \frac{7.38}{8.7} = 1.29$$

Step 56: Compare the outcome to the criterion in Equation 3.3.4.4.a

Since $1.29 > 1$, this particular gas mixture is considered to be flammable.

866

EXAMPLE MIXTURE: 2 % (H₂) + 6 % (CH₄) + 27 % (Ar) + 65 % (He)

Step 7: Calculate the lower explosion limit L_M according to Equations 2.2.4.4.c, 2.2.4.4.d and 2.2.2.4.e

$$L_M = \frac{100}{\frac{25}{4} + \frac{75}{4.4}} = 4.29 \text{ mole \%}$$

$$K = \frac{27 \times 0.55 + 65 \times 0.9}{(27 + 65)} = 0.797$$

$$L'_{H_2} = \frac{(100 - 4.29 - (1 - 0.797) \times \frac{27 + 65}{2 + 6} \times 4.29)}{(100 - 4.29)} \times 4 = 3.58 \text{ mole \%}$$

$$L'_{CH_4} = \frac{(100 - 4.29 - (1 - 0.797) \times \frac{27 + 65}{2 + 6} \times 4.29)}{(100 - 4.29)} \times 4.4 = 3.94 \text{ mole \%}$$

$$L_M = \frac{100}{\frac{2}{3.58} + \frac{6}{3.94}} = 48.04 \text{ mole } \%$$

Step 8: Compare the outcome to the criterion in CLP

As the upper explosion limit cannot be calculated it is not known if this mixture has a flammable range with air of at least 12 percentage points regardless of the lower flammable limit.

Since L_M is > 6%, this particular gas mixture is classified as a flammable gas category 1B, H221.

In addition, it is classified as gas under pressure, H280.

3.3.8. References

Le Chatelier, H. L., *Note sur le dosage du grisou par les limites de'inflammabilité*, Annales des mines 19 (1891) 388–395

3.4. Aerosols

3.4.1. Introduction

Identical criteria related to the flammability of aerosols are found in Annex I, Section 2.3 of CLP, Chapter 2.3 of GHS as well as in the Aerosol Dispensers Directive (ADD) 75/324/EEC. As of GHS revision 8, chapter 2.3 regarding aerosols has been split into two sub-chapters – one for aerosols and the other for chemicals under pressure. The latter is a new hazard class from GHS revision 8 and onwards, which is not yet implemented in the current version of the CLP Regulation⁴. Other than a renumbering of the paragraphs, however, there was no change for the class of aerosols.

The classification (and labelling) of aerosols according to CLP is fully aligned with the European Aerosol Dispenser Directive 75/324/EEG (ADD) as regards the flammability and pressure hazards.

3.4.2. Definitions and general considerations for classification of aerosols

Annex I: 2.3.1. _____-Definitions

Aerosols, this means aerosol dispensers, are any non-refillable receptacles made of metal, glass or plastics and containing a gas compressed, liquefied or dissolved under pressure, with or without a liquid, paste or powder, and fitted with a release device allowing the contents to be ejected as solid or liquid particles in suspension in a gas, as a foam, paste or powder or in a liquid state or in a gaseous state.

It should be noted that the type of aerosol container may affect the outcome of flammability tests for aerosols which may, in turn, affect the classification if it is based on testing.

3.4.3. Relation to other physical hazards

There is no direct relation to other physical hazards. As the class of aerosols includes the flammability aspects, they should not be classified as flammables gases, flammable liquids or

flammable solids in addition. Other classifications may, however, apply to aerosols (as for any other container).

Annex I, 2.3.2.1.

[...]

~~Note~~ **NOTE** 2: Aerosols do not fall additionally within the scope of Sections 2.2 (flammable gases), 2.5 (gases under pressure), 2.6 (flammable liquids) and **Error! Reference source not found.** (flammable solids). Depending on their contents, aerosols may however fall within the scope of other hazard classes, including their labelling elements.

3.4.4. Classification of aerosols

3.4.4.1. Classification criteria

Annex I:

-2.3.2.1. Aerosols shall be classified in one of the three categories of this hazard class, depending on their flammable properties and their heat of combustion. They shall be considered for classification in Category 1 or 2 if they contain more than 1% components (by mass) which are classified as flammable according to the following criteria set out in this Part:

- Flammable gases (see Section **Error! Reference source not found.**);
- Liquids with a flash point ≤ 93 °C, which includes Flammable Liquids according to section 2.6;
- Flammable solids (see Section **Error! Reference source not found.**);

or ~~if~~ their heat of combustion is at least 20kJ/g.

~~NOTE~~ **NOTE** 1:

Flammable components do not cover pyrophoric, self-heating or water-reactive substances and mixtures because such components are never used as aerosol contents.

[...]

2.3.2.2. An aerosol shall be classified in one of the three categories for this Class on the basis of its components, of its chemical heat of combustion and, if applicable, of the results of the foam test (for foam aerosols) and of the ignition distance test and enclosed space test (for spray aerosols) in accordance with Figures 2.3.1(a) to 2.3.1(c) of this Annex and sub-sections 31.4, 31.5 and 31.6 of Part III of the UN RTDG, Manual of Tests and Criteria. Aerosols which do not meet the criteria for inclusion in Category 1 or Category 2 shall be classified in Category 3.

Note:

Aerosols containing more than 1% flammable components or with a heat of combustion of at least 20 kJ/g, which are not submitted to the flammability classification procedures in this section shall be classified as aerosols, Category 1.

Under the ADD and also in UN-MTC, Section 31, flammability classification for aerosols refers to 'extremely flammable', 'flammable' and '~~non-not classified as~~ flammable aerosol'. This

52	Title
897	respectively corresponds to the terms 'Aerosol, Category 1', 'Aerosol, Category 2' and 'Aerosol,
898	Category 3' which are used in CLP.
899	The following identical criteria can be found in both CLP and ADD:
900	The aerosol is classified as 'Aerosol, Category 3' if it contains 1 % or less flammable
901	components¹⁰ and the chemical heat of combustion is less than 20 kJ/g.
902	The aerosol is classified as 'Aerosol, Category 1' if it contains 85 % or more flammable
903	components and the chemical heat of combustion is 30 kJ/g or more.
904	All other aerosols should be submitted to the appropriate flammability classification procedures
905	in order to select the appropriate Category 1, 2 or 3. However, if these are not submitted to the
906	flammability classification procedures they must be automatically classified as 'Aerosol, Category
907	1'.
908	<u>In CLP, the full set of criteria including those based on testing are included only by reference</u>
909	<u>(see Annex I, section 2.3.2.2 of CLP) and in the decision logic. The GHS rev. 8 contains the</u>
910	<u>following criteria table with the full set of criteria:</u>

¹⁰ Depending on their flash point value, also certain liquids not classified under CLP as Flam. Liq., Cat. 1, 2 or 3, will be considered as flammable components in an aerosol. The CLP hazard class of flammable liquids covers liquids of flash point ≤ 60 °C while a liquid component in an aerosol is considered flammable when its flash point is ≤ 93 °C.

911 **Table 1: Criteria for aerosols (Table 2.3.1 of the GHS)**

Category	Criteria
1	<p>(a) Any aerosol that contains ≥ 85 % flammable components (by mass) and has a heat of combustion of ≥ 30 kJ/g;</p> <p>(b) Any aerosol that dispenses a spray that, in the ignition distance test, has an ignition distance of ≥ 75 cm; or</p> <p>(c) Any aerosol that dispenses a foam that, in the foam flammability test, has:</p> <p>(i) a flame height of ≥ 20 cm and a flame duration of ≥ 2 s; or</p> <p>(ii) a flame height of ≥ 4 cm and a flame duration of ≥ 7 s.</p>
2	<p>(a) Any aerosol that dispenses a spray that, based on the results of the ignition distance test, does not meet the criteria for Category 1, and which has:</p> <p>(i) a heat of combustion of ≥ 20 kJ/g;</p> <p>(ii) a heat of combustion of < 20 kJ/g along with an ignition distance of ≥ 15 cm; or</p> <p>(iii) a heat of combustion of < 20 kJ/g and an ignition distance of < 15 cm along with either, in the enclosed space ignition test:</p> <p>- a time equivalent of ≤ 300 s/m³; or</p> <p>- a deflagration density of ≤ 300 g/m³; or</p> <p>(b) Any aerosol that dispenses a foam that, based on the results of the aerosol foam flammability test, does not meet the criteria for Category 1, and which has a flame height of ≥ 4 cm and a flame duration of ≥ 2 s.</p>
3	<p>(a) Any aerosol that contains ≤ 1 % flammable components (by mass) and that has a heat of combustion < 20 kJ/g; or</p> <p>(b) Any aerosol that contains > 1 % (by mass) flammable components or which has a heat of combustion of ≥ 20 kJ/g but which, based on the results of the ignition distance test, the enclosed space ignition test or the aerosol foam flammability test, does not meet the criteria for Category 1 or Category 2.</p>

912 **NOTE 1:** Flammable components do not cover pyrophoric, self-heating or water-reactive
 913 substances and mixtures because such components are never used as aerosol contents.

914 **NOTE 2:** Aerosols containing more than 1 % flammable components or with a heat of
 915 combustion of at least 20 kJ/g, which are not submitted to the flammability classification
 916 procedures in this chapter should be classified as aerosols, Category 1.

917 **NOTE 3:** Aerosols do not fall additionally within the scope of chapter 2.2 (flammable gases),
 918 section 2.3.2 (chemicals under pressure), chapters 2.5 (gases under pressure), 2.6 (flammable
 919 liquids) and 2.7 (flammable solids). Depending on their contents, aerosols may however fall
 920 within the scope of other hazard classes, including their labelling elements.

921 The chemical heat of combustion is determined in accordance with CLP Annex I, 2.3.4.1 which

is identical to point 1.10 of the Annex to ADD.

3.4.4.2. Testing and evaluation of hazard information

Results from the ignition distance test, the enclosed space test and the foam flammability test may be used for classification related to the flammability of aerosols. As a reminder, the enclosed space test should be performed only for spray aerosols and if no ignition was observed during the ignition distance test. Performing the enclosed space test erroneously despite of this may lead to safety issues. These test methods are described under point 6.3 of the Annex to ADD and are therefore available in all EU languages. They are also described in the UN-MTC Section 31.

After evaluation according to the appropriate criteria (see previous sections) the aerosol is classified in one of the three categories.


3.4.4.3. Decision logics

The classification procedure is also laid down in the following flow-charts which are applicable according to CLP.




NOTE: The person responsible for the classification of aerosols should be experienced in this field and be familiar with the criteria for classification.


937 3.4.4.3.1. Decision logics for aerosols

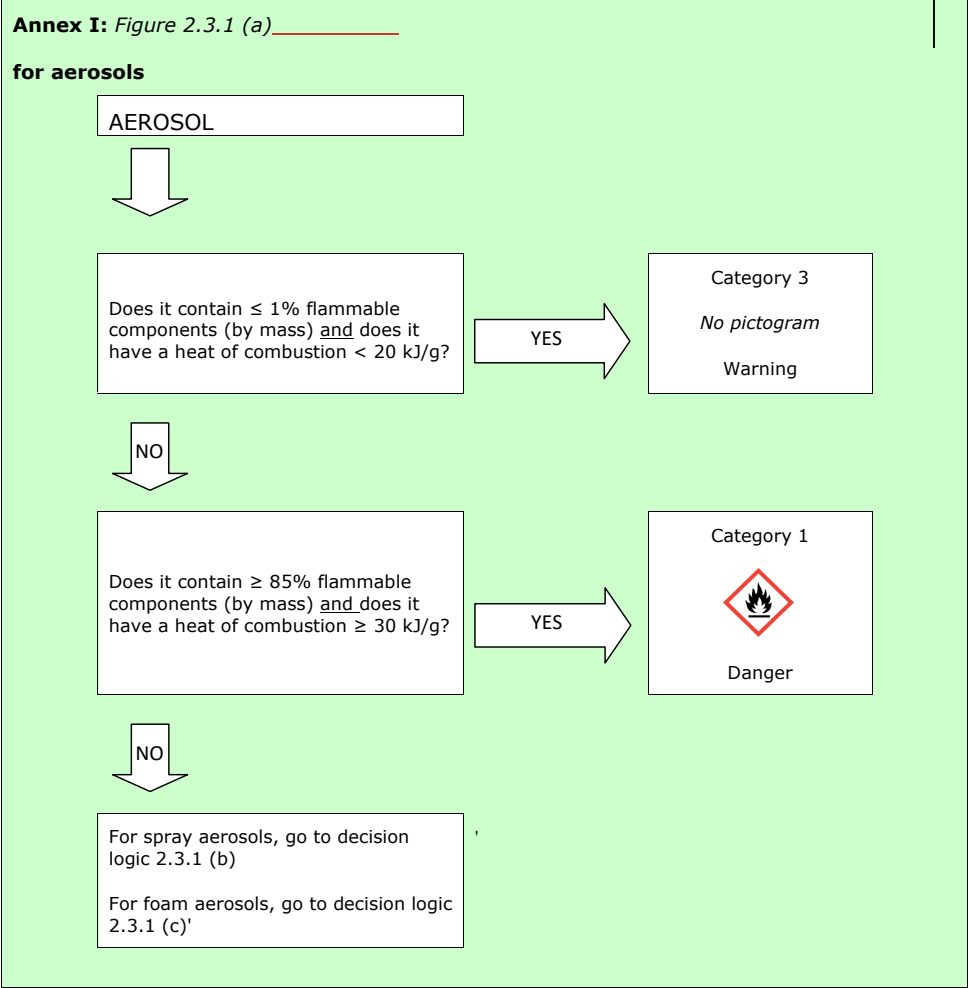

939 3.4.4.3.2. Decision logics for spray aerosols

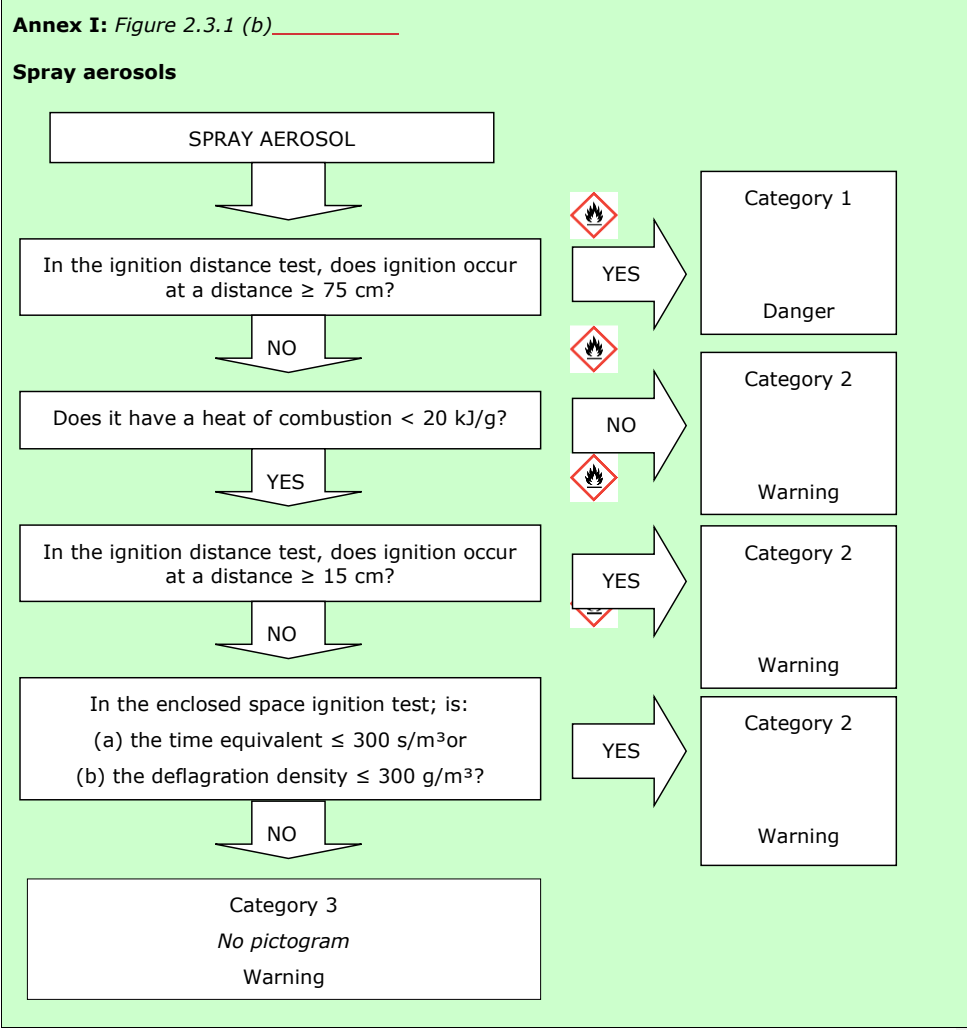

941 3.4.4.3.3. Decision logics for foam aerosols

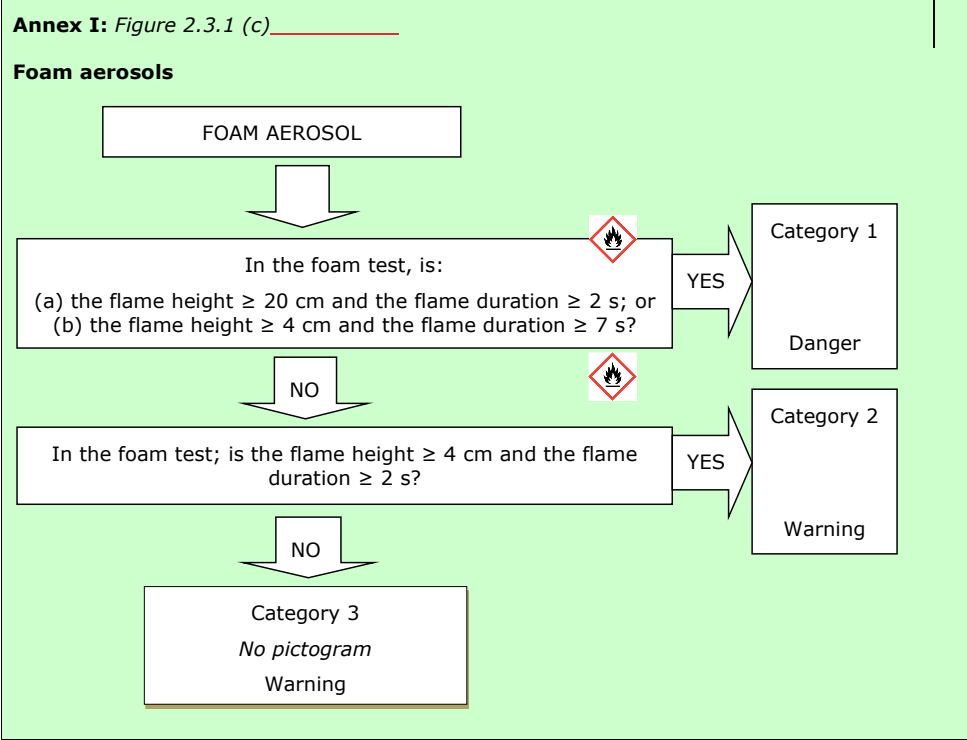

942 3.4.5. Hazard communication for aerosols

943 3.4.5.1. Pictograms, signal words, hazard statements and precautionary
944 statements

Annex I: Table 2.3.1			
Label elements for aerosols			
Classification	Category 1	Category 2	Category 3
GHS Pictograms			No pictogram
Signal Word	Danger	Warning	Warning
Hazard Statement	H222: Extremely flammable aerosol H229: Pressurised container: May burst	H223: Flammable aerosol H229: Pressurised container: May burst	H229: Pressurised container: May burst if heated.

	<i>if heated.</i>	<i>if heated.</i>	
Precautionary Statement Prevention	P210 P211 P251	P210 P211 P251	P210 P251
Precautionary Statement Response			
Precautionary Statement Storage	P410 + P412	P410 + P412	P410 + P412
Precautionary Statement Disposal			

945 The wording of the Precautionary Statements is found in CLP Annex IV, Part 2.

946 **3.4.5.2. Additional labelling provisions**

947 The ADD imposes additional labelling requirements on ~~all aerosols, flammable or not.~~

948 ~~For example:~~

949 ~~Where an aerosol dispenser contains flammable components but is not classified as flammable~~
950 ~~(i.e. 'Aerosol, Category 3'), the quantity of flammable material contained in the aerosol dispenser~~
951 ~~must be stated clearly on the label, in the form of the following legible and indelible wording: 'X~~
952 ~~% by mass of the contents are flammable'.~~

953 **3.4.6. Relation to transport classification**

954 Aerosol dispensers (UN 1950) belong to Class 2 in the UN RTDG Model Regulations and in the
955 modal transport regulations (ADR, RID, ADN and IMDG Code, ICAO TI). Flammability
956 classification criteria are harmonised between CLP and in the modal transport regulations (ADR,
957 RID, ADN and IMDG Code, ICAO TI).

958 Aerosols, Category 1 and 2 fall under Division 2.1 (sometimes referred to as Class 2.1 or Group
959 F, FC, TF or TFC depending on their contents with hazardous properties). Aerosols, Category 3
960 fall under Division 2.2 (sometimes referred to as Class 2.2 or Group A, O, T, C, CO, TC or TOC
961 depending on their contents with hazardous properties). See Annex VII for additional information
962 on transport classification in relation to CLP classification.

963 **3.4.7. Example of classification for aerosols**

964 For reasons of simplification the active materials chosen in the examples have been considered
965 as non-combustible materials ($\Delta H_c = 0$ kJ/g). However this ~~is may~~ not ~~be~~ the case in practice.

966 **3.4.7.1. Example of substances and mixtures fulfilling the classification**
967 **criteria**

Deodorant:	
Composition:	
Butane/propane:	70 % (flammable components, $\Delta H_c = 43.5$ kJ/g)
Ethanol:	25 % (flammable components, $\Delta H_c = 24.7$ kJ/g)

Others:	5 % (non-flammable components, ΔHc = 0 kJ/g)
This spray aerosol contains 95 % of flammable components, and its chemical heat of combustion equals 36.6 kJ/g (= 0.70 * 43.5 + 0.25 * 24.7).	
This aerosol is classified as Aerosol, Category 1.	
Air freshener (wet):	
Composition:	
Butane/propane:	30 % (flammable components, ΔHc = 43.5 kJ/g)
Others:	70 % (non-flammable components, ΔHc = 0 kJ/g)
This spray aerosol contains 30 % of flammable components and its chemical heat of combustion equals 13.1 kJ/g.	
In the ignition distance test, the ignition occurs at less than 75 cm but more than 15 cm.	
This aerosol is classified as Aerosol, Category 2.	
Shaving foam:	
Composition:	
Butane/propane:	4 % (flammable components, ΔHc = 43.5 kJ/g)
Others:	96 % (non-flammable components, ΔHc = 0 kJ/g)
This foam aerosol contains 4 % of flammable components and its chemical heat of combustion equals 1.7 kJ/g.	
In the foam test, the flame height is less than 4 cm and the flame duration less than 2 s.	
This aerosol is classified as Aerosol, Category 3.	
However, according to the requirements of ADD, the quantity of flammable components must be stated clearly on the label: '4% by mass of the contents are flammable'.	

968

969

970

971

972

973

3.4.7.2. Examples of aerosols not fulfilling the classification criteria

By definition, all aerosol dispensers fall under one of the three categories for this hazard class.

3.5. Oxidising gases

3.5.1. Introduction

The requirements in Chapter 2.4 'Oxidising gases' of Annex I of CLP are identical to those in chapter 2.4 of ~~the~~ GHS⁴.

974 **3.5.2. Definitions and general considerations for the classification of**
975 **oxidising gases**

Annex I: 2.4.1. *Oxidising gas means any gas or gas mixture which may, generally by providing oxygen, cause or contribute to the combustion of other material more than air does.*

976 **3.5.3. Relation to other physical hazards**

977 Oxidising gases usually do not need to be classified in any other physical hazard class apart
978 from 'Gases under pressure', 'Chemicals under pressure' or 'Aerosol' where appropriate.

979 **3.5.4. Classification of substances and mixtures as oxidising gases**

980 **3.5.4.1. Identification of hazard information**

981 There are not many pure gases that are oxidising. Most oxidising gases are identified as such in
982 the UN RTDG Model Regulations and in ISO 10156 *Gases and gas mixtures: Determination of*
983 *fire potential and oxidizing ability for the selection of cylinder valve outlets* as amended.

984 If no or insufficient information is available, screening and waiving possibilities should be
985 checked. Depending on the results, testing might be necessary, see section 3.5.4.2.

986 **3.5.4.2. Screening procedures and waiving of testing**

987 Gas mixtures are often prepared on demand and thus. ~~There~~ there are thousands of gas mixtures
988 containing oxidising gases on the market. ~~and However,~~ there are very few test reports or data
989 on the oxidising potential of gas mixtures in the scientific literature. Tests according to ISO
990 10156 as amended in order to determine the oxidising potential are time consuming and
991 expensive ~~for gas mixtures which are often prepared on demand.~~ In most ~~of the~~ cases, ~~the~~
992 ~~formulator of the gas mixture will use~~ a calculation method as described in ISO 10156 as
993 amended may be applied.

994 **3.5.4.3. Classification criteria**

995

Annex I: 2.4.2. *Table 2.4.1*

Criteria for oxidising gases

Category	Criteria
1	<i>Any gas which may, generally by providing oxygen, cause or contribute to the combustion of other material more than air does.</i>

Note:

'Gases which cause or contribute to the combustion of other material more than air does'
means pure gases or gas mixtures with an oxidising power greater than 23.5 % as
determined by a method specified in ISO 10156 as amended.

996 ~~Please note that ISO 10156 2:2005 has been integrated into the revised version ISO~~
997 ~~10156:2010. ISO 10156:2010 supersedes EN 720 2:1996 and ISO 10156 2:2005.~~

998 **3.5.4.4. Testing and evaluation of hazard information**

999 ISO 10156 as amended describes a test method and a calculation method for the classification
1000 of oxidising gases. The test method may be used in all cases, but must be used when the
1001 calculation method cannot be applied.

1002 The calculation method applies to gas mixtures and can be applied only when the C_i for all
1003 oxidising components and the K_k for all inert components are available. These are listed for a
1004 number of gases in ISO 10156 as amended. For gas mixtures the calculation method described
1005 in ISO 10156 as amended uses the criterion that a gas mixture should be considered as more
1006 oxidising than air if the 'Oxidising Power' (OP) of the gas mixture is higher than 0.235 (23.5 %).

1007 The OP is calculated as follows:

1008 **Equation 3.5.4.4.a**

$$OP = \frac{\sum_{i=1}^n x_i C_i}{\sum_{i=1}^n x_i + \sum_{k=1}^p K_k B_k}$$

1009 Where:

- 1010 x_i is the molar fraction of the i :th oxidising gas in the mixture, in %
- 1011 C_i is the coefficient of oxygen equivalency of the i :th oxidising gas in the mixture
- 1012 K_k is the coefficient of equivalency of the k :th inert gas ~~k~~ -relative to nitrogen
- 1013 B_k is the molar fraction of the k :th inert gas in the mixture, in %
- 1014 n is the number of oxidising gases in the mixture
- 1015 p is the number of inert gases in the mixture.

1016 For mixtures containing both flammable and oxidising components, special calculation methods
1017 are described in ISO 10156 as amended.


1018 In the case a gas or gas mixture needs to be tested for its oxidising potential, a recognised
1019 international standard must be used. CLP explicitly refers to ISO 10156, Gases and gas mixtures
1020 – Determination of fire potential and oxidising ability for the selection of cylinder valves outlets
1021 as amended.

1022 **3.5.4.5. Decision logic**

1023 Classification of oxidising gases is done according to decision logic 2.4 in section 2.4.4.1 ~~as~~
1024 ~~included in~~ of the GHS.


⚠ NOTE: The person responsible for the classification of oxidising gases should be experienced
in this field and be familiar with the criteria for classification.

1025 **Figure 1: Decision logic for oxidising gases (Decision logic 2.4 of the GHS)**

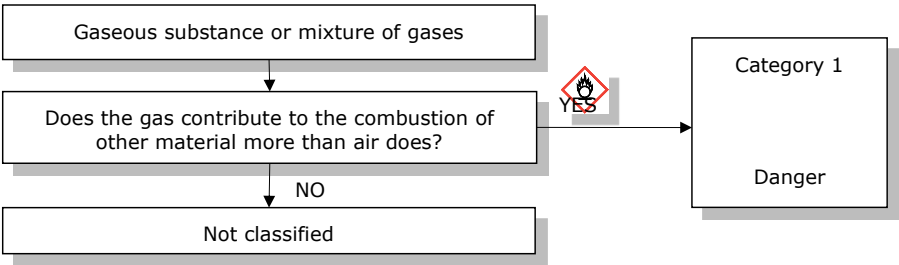

3.5.5. Hazard communication for oxidising gases

3.5.5.1. Pictograms, signal words, hazard statements and precautionary statements

Annex I: Table 2.4.2	
Label elements for oxidising gases	
Classification	Category 1
GHS Pictogram	
Signal word	Danger
Hazard statement	H270: May cause or intensify fire; oxidiser
Precautionary Statement Prevention	P220 P244
Precautionary Statement Response	P370 + P376
Precautionary Statement Storage	P403
Precautionary Statement Disposal	

The wording of the Precautionary Statements is found in CLP Annex IV, Part 2.

3.5.6. Relation to transport classification

Most oxidising gases are classified as ~~such gases~~ with subsidiary risk 5.1 in the UN RTDG Model Regulations. Consequently all gases listed as oxidising in the UN RTDG Model Regulations and in the modal transport regulations (ADR, RID, ADN and IMDG Code, ICAO TI) must be classified as Ox. Gas 1. See Annex VII for additional information on transport classification in relation to CLP classification.

1038 3.5.7. Example of classification for oxidising gases

1039 3.5.7.1. Example of substances and mixtures not fulfilling the classification
1040 criteria

EXAMPLE OF A CLASSIFICATION USING THE CALCULATION METHOD OF ISO 10156 AS AMENDED

Example Mixture: 9 % (O₂) + 16 % (N₂O) + 75 % (N₂)

Calculation steps

Step 1: Ascertain the coefficient of oxygen equivalency (C_i) for the oxidising gases in the mixture and the nitrogen equivalency factors (K_k) for the non-flammable, non-oxidising gases.

C _i (N ₂ O) =	0.6 (nitrous oxide)
C _i (O) =	1 (oxygen)
K _k (N ₂) =	1 (nitrogen)

Step 2: Calculate the Oxidising Power (OP) of the gas mixture according to Equation [3.5.4.4.a](#)

$$OP = \frac{\sum_{i=1}^n x_i C_i}{\sum_{i=1}^n x_i + \sum_{k=1}^p K_k B_k} = \frac{0.09 \times 1 + 0.16 \times 0.6}{0.09 + 0.16 + 0.75 \times 1} = 0.186$$

0.186 < 0.235 (18.6 % < 23.5 %), therefore the mixture is not considered as an oxidising gas.

1041

EXAMPLE OF A CLASSIFICATION USING THE CALCULATION METHOD OF ISO 10156 AS AMENDED

Example Mixture: 9 % (O₂) + 16 % (N₂O) + 75 % (Ar)

Calculation steps

Step 1: Ascertain the coefficient of oxygen equivalency (C_i) for the oxidising gases in the mixture and the nitrogen equivalency factors (K_k) for the non-flammable, non-oxidising gases.

C _i (N ₂ O) =	0.6 (nitrous oxide)
C _i (O) =	1 (oxygen)
K _k (Ar) =	0.55 (argon)

Step 2: Calculate the Oxidising Power (OP) of the gas mixture according to Equation [3.5.4.4.a](#)

$$OP = \frac{\sum_{i=1}^n x_i C_i}{\sum_{i=1}^n x_i + \sum_{k=1}^p K_k B_k} = \frac{0.09 \times 1 + 0.16 \times 0.6}{0.09 + 0.16 + 0.75 \times 0.55} = 0.281$$

0.281 > 0.235 (28.1 % > 23.5 %), therefore the mixture is considered as an oxidising gas.

3.6. Gases under pressure

3.6.1. Introduction

The requirements in Chapter 2.5 'Gases under pressure' of Annex I of CLP are identical to those in Chapter 2.5 of GHS⁴. The hazard class 'Gases under pressure' corresponds to Class 2 'Gases' in the UN RTDG Model Regulations.

3.6.2. Definitions and general considerations for classification of gases under pressure

3.6.2.1. Definition of 'gas'

Annex I: 1.0. Gas means a substance which (i) at 50 °C has a vapour pressure greater than 300 kPa (absolute); or (ii) is completely gaseous at 20 °C at a standard pressure of 101.3 kPa;

This definition means that substances and mixtures are considered as gases when their boiling point or initial boiling point (BP) is not higher than 20 °C. Substances and mixtures with a boiling point or initial boiling point higher than 20 °C are liquids except those few that develop a vapour pressure higher than 300 kPa at 50 °C; these substances and mixtures are considered as gases because of the pressure hazard when packaged.

Hydrogen fluoride (HF) with a BP of 19.4 °C is a borderline line case that has always been classified as a liquid.

3.6.2.2. Definition of gases under pressure

Annex I:

-2.5.1.1. Gases under pressure are gases ~~or gas mixtures~~ which are contained in a receptacle at a pressure of 200 kPa (gauge) or more at 20 °C, or which are liquefied or liquefied and refrigerated.

They comprise compressed gases, liquefied gases, dissolved gases and refrigerated liquefied gases.

2.5.1.2. The critical temperature is the temperature above which a pure gas cannot be liquefied, regardless of the degree of compression.

This definition means in practice that compressed gases or dissolved gases that are packaged at a pressure less than 200 kPa are not classified for this hazard.

Dissolved gases packaged at a pressure less than 200 kPa (gauge) are liquids and should be classified as such if they have other hazardous properties, e.g. flammable liquids.

~~Also~~**Furthermore**, liquids packaged under a layer of inert gas (e.g. nitrogen or helium) remain to be classified as liquids and not as gases under pressure.

3.6.3. Relation to other physical hazards

Gases under pressure may also need to be classified for the hazard classes flammable gases and oxidising gases where relevant.

3.6.4. Classification of substances and mixtures as gases under pressure

3.6.4.1. Identification of hazard information

Many gases are identified as such in the UN RTDG Model Regulations and many flammable gases and some oxidising gases are identified as gases in Annex VI of CLP. The UN RTDG Model Regulations identifies further if the gas can be packaged as a 'compressed gas', a 'liquefied gas', a 'refrigerated liquefied gas' and a 'dissolved gas'. To determine whether a substance is a gas in case it is not listed in the UN RTDG Model Regulations and in case of doubt, the following physical characteristics are necessary:

- the boiling point;
- the vapour pressure at 50 °C.

See also *IR & CSA, Chapter R.7a: Endpoint specific guidance*, Section R.7.1.3 (Boiling point), R.7.1.5 (Vapour pressure).

For those substances that meet the definition of a gas (see Section [Error! Reference source not found.](#)), the critical temperature is also necessary. For the classification of gas mixtures based on the pseudo-critical temperature see Section [Error! Reference source not found.](#).

The references according to Section [Error! Reference source not found.](#) provide good quality data on boiling points, vapour pressure and the critical temperature of substances.

3.6.4.2. Classification criteria

Annex I: Table 2.5.1

Criteria for gases under pressure

Group	Criteria
Compressed gas	A gas which when packaged under pressure is entirely gaseous at - 50 °C; including all gases with a critical temperature \leq - 50 °C.
Liquefied gas	A gas which, when packaged under pressure, is partially liquid at temperatures above - 50 °C. A distinction is made between: <ul style="list-style-type: none"> i) high pressure liquefied gas: a gas with a critical temperature between - 50 °C and + 65 °C; and ii) low pressure liquefied gas: a gas with a critical temperature above + 65 °C.
Refrigerated liquefied gas	A gas which when packaged is made partially liquid because of its low temperature.
Dissolved gas	A gas which when packaged under pressure is dissolved in a liquid phase solvent.
Note: Aerosols shall not be classified as gases under pressure. See Section Error! Reference source not found.	

NOTE: the distinction between high pressure and low pressure liquefied gas is not relevant for classification, only for transport requirements.

3.6.4.3. Testing and evaluation of hazard information

The critical temperature of pure gases is well defined and can be found in technical literature, e.g. EN 13096 *Transportable gas cylinders — Conditions for filling gases into receptacles — Single component gases* as amended.

For gas mixtures, the classification is based on the 'pseudo-critical temperature' which can be estimated as the mole weighted average of the components' critical temperatures.

Pseudo-critical temperature = $\sum_{i=1}^n x_i \times T_{Crit_i}$

where x_i is the molar concentration of component i and T_{Crit_i} is the critical temperature (in °C or in K) of the component i .

3.6.4.4. Decision logic

Classification of gases under pressure is done according to decision logic 2.5.4.1 as included in the GHS.


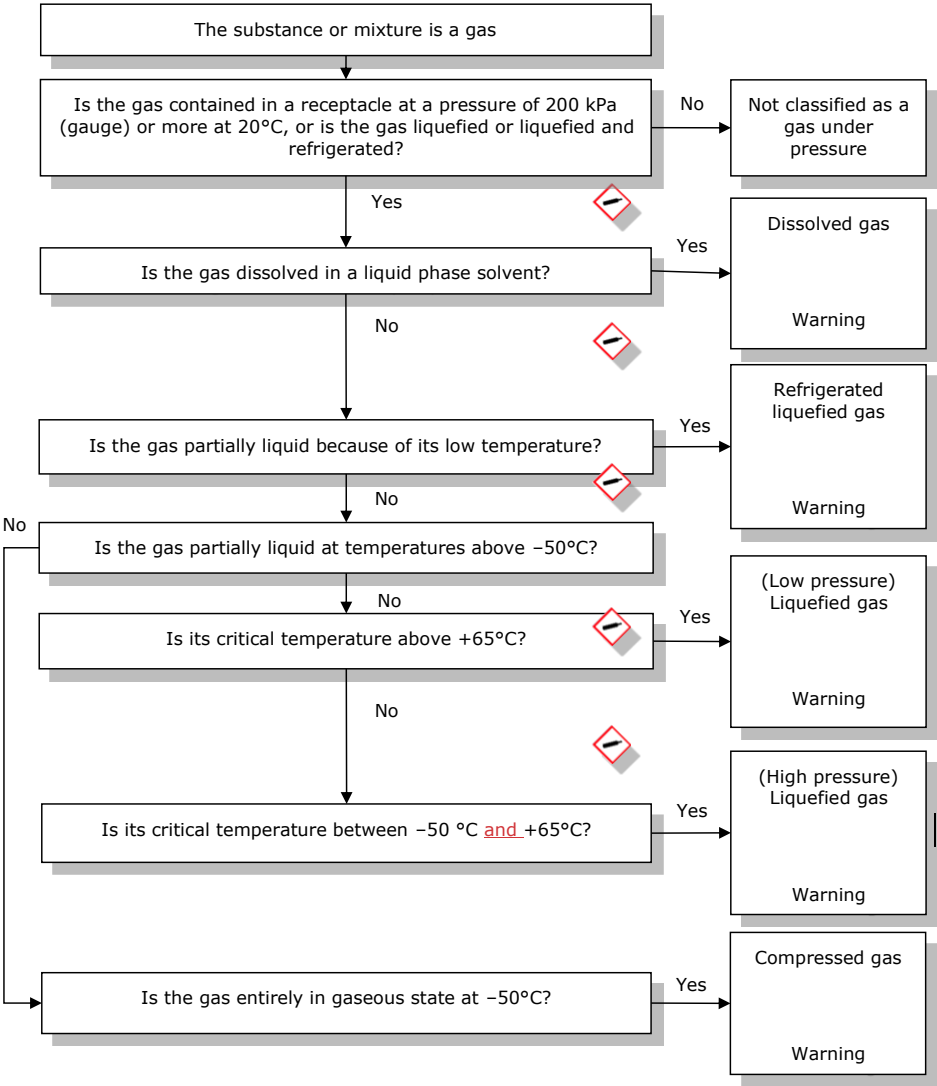
 NOTE: The person responsible for the classification of gases under pressure should be experienced in this field and be familiar with the criteria for classification.





Figure 2: Decision logic for gases under pressure (Decision logic 2.5 of GHS)



1099
1100 **3.6.5. Hazard communication for gases under pressure**

1101 **3.6.5.1. Pictograms, signal words, hazard statements and precautionary**
1102 **statements**

Annex I: Table 2.5.2				
Label elements for gases under pressure				
Classification	Compressed gas	Liquefied gas	Refrigerated liquefied gas	Dissolved gas

GHS Pictogram				
Signal Word	Warning	Warning	Warning	Warning
Hazard Statement	H280: Contains gas under pressure; may explode if heated	H280: Contains gas under pressure; may explode if heated	H281: Contains refrigerated gas; may cause cryogenic burns or injury	H280: Contains gas under pressure; may explode if heated
Precautionary Statements Prevention			P282	
Precautionary Statements Response			P336 + P315	
Precautionary Statements Storage	P410 + P403	P410 + P403	P403	P410 + P403
Precautionary Statements Disposal				
Note: Pictogram GHS04 is not required for gases under pressure where pictogram GHS02 or pictogram GHS06 appears.				

The wording of the Precautionary Statements is found in CLP Annex IV, Part 2.

3.6.6. Relation to transport classification

Gases are listed in UN RTDG Model Regulations and in the transport regulations (ADR, RID, ADN)¹¹ with an indication of the physical state in their name for compressed gases (e.g. Argon, compressed), for refrigerated liquefied gas (e.g. Oxygen, refrigerated liquid) and for dissolved gas (e.g. Acetylene, dissolved). These indications of the physical state can be used to identify the group of gases under pressure according to CLP. The gas names without an indication of the physical state are 'liquefied gases' by default. See Annex VII for additional information on transport classification in relation to CLP classification.

3.6.7. Example of classification for gases under pressure

3.6.7.1. Example of substances and mixtures fulfilling the classification criteria

3.6.7.1.1. Example mixture: 9 % (O₂) + 16 % (N₂O) + 75 % (N₂)

EXAMPLE MIXTURE: 9 % (O₂) + 16 % (N₂O) + 75 % (N₂)

Calculation steps:

¹¹ The classification codes according to the ADR, Sections 2.2.2.1.2 and 2.2.2.1.3 are: 1. Compressed gas; 2. Liquefied gas; 3. Refrigerated liquefied gas; 4. Dissolved gas. A asphyxiant; O oxidizing; F flammable; T toxic; TF toxic, flammable; TC toxic, corrosive; TO toxic, oxidizing; TFC toxic, flammable, corrosive; TOC toxic, oxidizing, corrosive.

Step 1: Ascertain the critical temperatures in Kelvin for the gases in the mixture:

Oxygen (O ₂):	T _{Crit} = -118.4 °C (= 154.75 K)
Nitrous Oxide (N ₂ O):	T _{Crit} = +36.4 °C (= 309.55 K)
Nitrogen (N ₂):	T _{Crit} = -147 °C (= 126.15 K)

Step 2: Calculate the pseudo-critical temperature:

$$0.09 \times 154.75 \text{ K} + 0.16 \times 309.55 \text{ K} + 0.75 \times 126.15 \text{ K} = 158.7 \text{ Kelvin} = - 115.08 \text{ °C}$$

The pseudo-critical temperature is lower than -50 °C, therefore the mixture is a 'compressed gas'.

3.7. Flammable liquids

3.7.1. Introduction

The criteria for 'Flammable liquids' are found in Annex I, Section 2.6 of CLP ~~and are not For Category 1-3, they are~~ identical to those of Chapter 2.6 of GHS⁴, as the respective GHS Chapter 2.6 contains additional classification criteria—The CLP has, however, not adopted Category 4 ~~for flammable liquids of GHS (for historical reasons). This means that substances and mixtures classified as flammable liquids Category 4 according to the GHS are not considered flammable liquids according to the CLP.~~

3.7.2. Definitions and general considerations for classification of flammable liquids

Annex I: 2.6.1. *Flammable liquid means a liquid having a flash point of not more than 60 °C.*

The flash point is the lowest temperature of the liquid, corrected to a barometric pressure of 101.3 kPa, at which application of a test flame causes the vapour of the liquid to ignite momentarily and a flame to propagate across the surface of the liquid under the specified conditions of test. This means, the lower explosion limit is exceeded at the flash point.

3.7.3. Relation to other physical hazards

For flammable liquids ~~that are packaged in aerosol dispensers, see Section 3.4 on Aerosols. If classified as flammable aerosols, they must~~ should not be classified as flammable liquids ~~in addition (see Section 2.3).~~

3.7.4. Classification of substances and mixtures as flammable liquids

3.7.4.1. Identification of hazard information

For the decision if a substance or mixture is a liquid see Section 3.1.3.

For the classification of a substance or mixture as a flammable liquid, data on the flash point and on the boiling point (or the initial boiling point) are needed. ~~For experimental determination of the flash point information on the viscosity of the liquid is needed, in order to select a suitable method. Furthermore, in order to make use of the derogation for classification in Category 3 according to Annex I Section 2.6.4.5 of CLP (see Section 2.6.4.3), information on sustained combustibility is necessary.~~

Field Code Changed

Experimentally determined data or data taken from reliable data sources are to be preferred over calculated ones. ~~See also IR & CSA, Chapter R.7a: Endpoint specific guidance, Section R.7.1.3 (Boiling point), R.7.1.9 (Flash point).~~

The references in Section 3.7.8 provide good quality data on boiling points (all three references) and flash point (first reference) of substances.

~~Special care is required when viscous substances or mixtures are tested or when halogenated compounds are present (see Section 2.6.4.4.1).~~

Field Code Changed

3.7.4.2. Screening procedures and waiving of testing

3.7.4.2.1. Boiling point

Normally calculation methods based on increments give satisfying results for substances and

mixtures. With respect to the criterion for distinguishing between Category 1 and 2 (boiling point of 35 °C) only that method with a mean absolute error lower than 5 °C could be recommended for screening.

3.7.4.2.2. Flash point

Calculation should work for pure liquids, neglecting impurities, if the vapour pressure curve and lower explosion limit are accurately known. For mixtures, calculation of the flash point is sometimes not reliable and at this time, it is not possible to predict what the accuracy of a calculated value is. Calculation can be used as a screening test for mixtures, and a flash point need not be determined experimentally if the calculated value using the method cited in CLP Annex I, 2.6.4.3 is 5 °C greater than the relevant classification criterion (23 °C and 60 °C, respectively). However, the restrictions outlined in the CLP Annex I, 2.6.4.2 must be taken account of.

Calculation based on structural similarity or properties is often only applicable to a narrowly defined set of substances. For mixtures they are not yet applicable.

Therefore for both flash point and boiling point experimental determination is ~~normally required~~ recommended.

3.7.4.3. Classification criteria

A flammable liquid has to be classified in one of the 3 categories of this class.

Annex I: Table 2.6.1

~~Label elements~~Criteria for flammable liquids

Category	Criteria
1	Flash point < 23 °C and initial boiling point ≤ 35 °C
2	Flash point < 23 °C and initial boiling point > 35 °C
3	Flash point ≥ 23 °C and ≤ 60 °C ⁽¹⁾
(1) For the purpose of this Regulation gas oils, diesel and light heating oils having a flash point between > 55 °C and ≤ 75 °C may be regarded as Category 3.	
Note: Aerosols shall not be classified as flammable liquids; see section 2.3.	

Annex I: 2.6.4.5. Liquids with a flash point of more than 35 °C and not more than 60 °C need not be classified in Category 3 if negative results have been obtained in the sustained combustibility test L.2, Part III, section 32 of the UN RTDG, Manual of Tests and Criteria.

Gas oils, diesel and light heating oils in the flash point range of 55 °C to 75 °C may be regarded as a whole. The reason is that these hydrocarbon mixtures have varying flash points in that range due to seasonal requirements (EN 590 Automotive fuels – Diesel- Requirements and Test Methods as amended). If they are regarded as a whole for CLP they have to be regarded as Category 3. This states however no preliminary decision with respect to downstream Regulations and legislation.

3.7.4.4. Testing and evaluation of hazard information

~~The assignment to the respective hazard category will determine the technical means to be taken to avoid dangerous events. In combination with other safety characteristics like explosion limits or auto-ignition temperature this can lead to clear restrictions in the conditions of use. The relevant data are to be communicated via the CSR and SDS (see IR&CSA Part F: Chemical Safety Report, Part G: Extending the SDS and Guidance on compilation of safety data sheets respectively). For experimental determination of the flash point information on the viscosity of the liquid is needed, in order to select a suitable method. Furthermore, in order to make use of the derogation for classification in Category 3 according to Annex I Section 2.6.4.5 of CLP (see Section 3.7.4.3), information on sustained combustibility is necessary.~~

Special care is required when viscous substances or mixtures are tested or when halogenated compounds are present (see Section 3.7.4.4).

3.7.4.4.1. Testing

Suitable methods are listed in CLP Annex I, Table 2.6.3.

In case of substances with a high decomposition potential, a method using small amounts of liquid (e.g. EN ISO 3679 *Determination of flash point - Rapid equilibrium closed cup method* as amended) is recommended to reduce the amount of substance under test.

The method to be used has to be chosen taking into account the properties of the liquid (viscosity, halogenated compounds present) and the scope of the standard.

For classification purposes it is recommended to use the mean of at least two test runs. One of these runs may be automated. In case of a deviation between manual and automated determination above the tolerance limits of the method, the lower value should be taken or the determination should be repeated with manual observation. If the experimentally determined flash point is found to be within ± 2 °C a threshold limit when using a non-equilibrium method, it is recommended to repeat the determination with an equilibrium method.

~~If no flash point is found up to 60 °C and (partly) halogenated compounds are present or if there is the possibility of loss of volatile flammable or non-flammable components (i.e. the liquid is a candidate for the assignment of EUH018, EUH209 or EUH209A) or if in doubt, the explosion limits should be determined in order to decide whether labelling with EUH018, EUH209 or EUH209A is appropriate. Determination of explosion limits should be carried out according to EN 1839 *Determination of explosion limits of gases and vapours* as amended or ISO 10156 *Gases and gas mixtures - Determination of fire potential and oxidising ability for the selection of cylinder valves outlets* as amended or EN 15794 *Determination of explosion points of flammable liquids* as amended.~~

Substances

For non-halogenated substances, the flash point is usually found 80 °C to 130 °C below the boiling point. Special care has to be taken when a sample contains impurities with a lower boiling point than the main compound. Even if their concentration is below 0.5 %, especially if their boiling point is substantially lower, they may have a strong effect on the test result. Impurities with a higher boiling point will normally have no effect on the flash point.

Within the respective scope, every standard is applicable. However, care must be taken to select the appropriate method and standard for the substance being tested.

Mixtures

1222 The flash point may be lower than the lowest flash point of the components and non-volatile
1223 components may influence the flash point.

1224 Equilibrium methods are advised if the boiling points of the components of the mixture cover a
1225 wide range of temperatures or their concentrations are very different. They are also advised in
1226 case of viscous mixtures (alternatively: test methods with low heating rates (1 °C per min) using
1227 a stirrer).

1228 In case of viscous mixtures or if an inerting substance is present at low concentrations and this
1229 is a highly volatile compound, the ignitability of the mixture may depend on the temperature at
1230 which the tests are started. When an inerting substance is present temperature ranges may
1231 exist where the vapour phase is inerted and other temperature ranges where it is not.

1232 Halogenated compounds

1233 The difference between boiling point and flash point may be lower than with non-halogenated
1234 compounds.

1235 It is highly recommended to run the tests under careful control with manual observation.

1236 Test results may be very difficult to reproduce. In such cases, classification should be based on
1237 the lowest value found (flash or burning inside or outside the cup) or on the value obtained
1238 during the screening run if in the main trial performed in accordance with the standard, no flash
1239 could be found.

1240 **3.7.4.4.2. Evaluation of hazard information**

1241 Flash points determined by testing or from the mentioned internationally recognised qualified
1242 literature are to be preferred over those derived by calculation because of the error of most of
1243 the QSAR¹² methods and their limited application range.


1244 If in literature different flash points are found for the same substance the one found as evaluated
1245 or recommended has to be preferred.

1246 If in literature different flash points are found for the same substance where none is found as
1247 evaluated/recommended the lower one has to be preferred because of safety reasons or an
1248 experimental determination should be carried out.

1249 ~~According to the criteria either Category 1, Category 2 or Category 3, including the relevant~~
1250 ~~hazard statement and signal word, have to be assigned (see Section 2.6.5). In case the criteria~~
1251 ~~for EUH018, EUH209 or EUH209A are met, the liquid has to be labelled with the respective~~
1252 ~~supplemental hazard statement as well. In the majority of cases EUH018 covers EUH209 and~~
1253 ~~EUH209A.~~

1254 **3.7.4.5. Decision logic**


1255 Compared to the decision logic 2.6 for flammable liquids contained in the GHS chapter 2.6.4.1,
1256 this decision logic below is amended to include derogations for gas oil, diesel, light heating,
1257 sustained combustibility and for phrases EUH018, EUH209 and EUH209A.

 NOTE: The person responsible for the classification of flammable liquids should be experienced in this field and be familiar with the criteria for classification.

1258 **Figure 3: Amended GHS decision logic for flammable liquids to include derogations for gas oil,**

¹² Quantitative structure–activity relationship

diesel, light heating, sustained combustibility and for phrases EUH018, EUH209 and EUH209A
 (see 3.7.5.2 for more information on phrases)

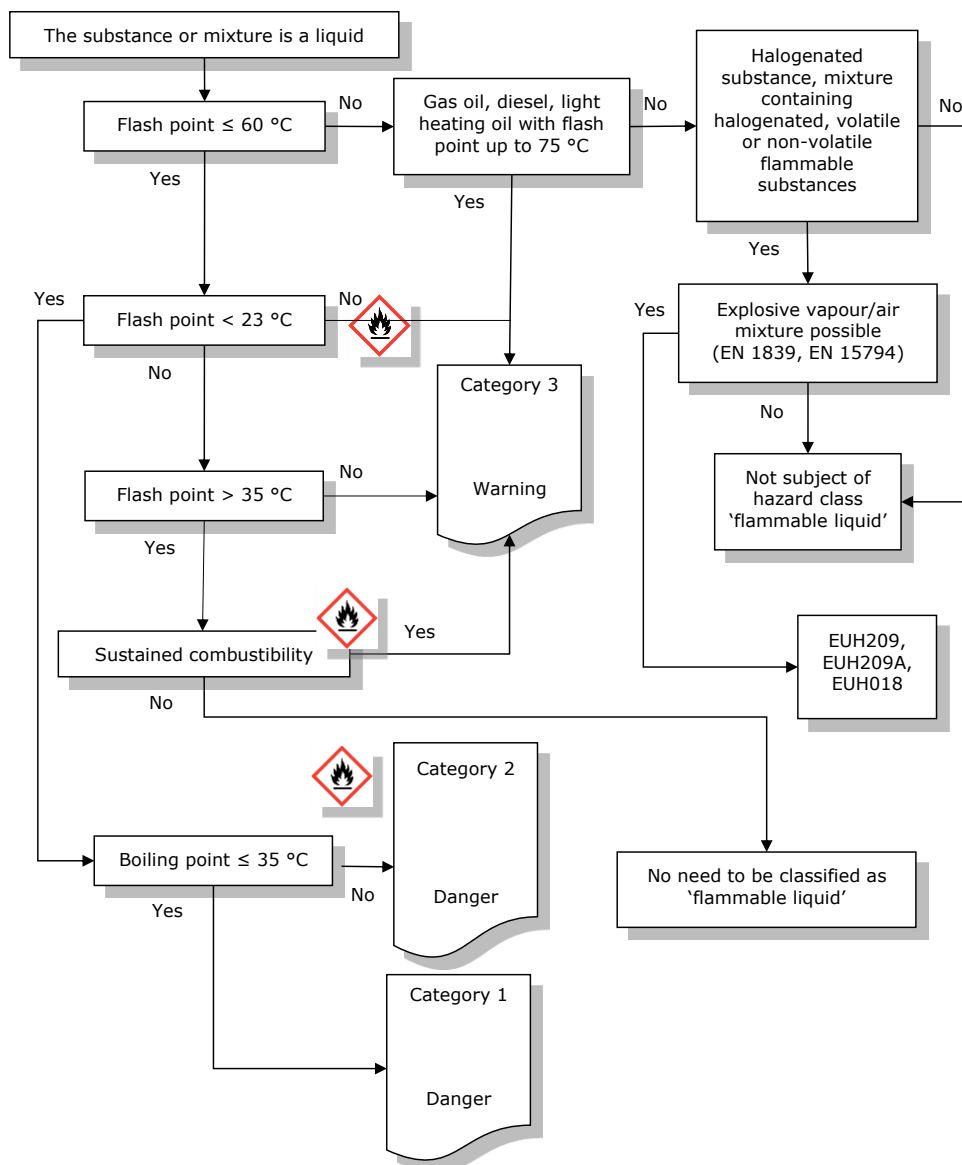




1259
1260

1261

3.7.5. Hazard communication for flammable liquids

3.7.5.1. Pictograms, signal words, hazard statements and precautionary statements

Annex I: 2.6.3. Table 2.6.2			
Label elements for flammable liquids			
Classification	Category 1	Category 2	Category 3
GHS Pictograms			
Signal Word	Danger	Danger	Warning
Hazard Statement	H224: Extremely flammable liquid and vapour	H225: Highly flammable liquid and vapour	H226: Flammable liquid and vapour
Precautionary Statement Prevention	P210 P233 P240 P241 P242 P243 P280	P210 P233 P240 P241 P242 P243 P280	P210 P233 P240 P241 P242 P243 P280
Precautionary Statement Response	P303 + P361 + P353 P370 + P378	P303 + P361 + P353 P370 + P378	P303 + P361 + P353 P370 + P378
Precautionary Statement Storage	P403 + P235	P403 + P235	P403 + P235
Precautionary Statement Disposal	P501	P501	P501

The wording of the Precautionary Statements is found in CLP Annex IV, Part 2.

3.7.5.2. Additional labelling provisions for flammable liquids

If no flash point is found up to 60 °C and (partly) halogenated compounds are present or if there is the possibility of loss of volatile flammable or non-flammable components (i.e. the liquid is a candidate for the assignment of EUH018, EUH209 or EUH209A) or if in doubt, the explosion limits should be determined in order to decide whether labelling with EUH018, EUH209 or EUH209A is appropriate. Determination of explosion limits should be carried out according to ISO 10156 Gases and gas mixtures – Determination of fire potential and oxidising ability for the selection of cylinder valves outlets as amended or EN 15794 Determination of explosion points of flammable liquids as amended or EN 1839 Determination of explosion limits of gases and vapours as amended.

Annex II: 1.1.4. _____ EUH018 – 'In use, may form flammable/explosive vapour-air mixture'

For substances and mixtures not classified as flammable themselves, which may form flammable/explosive vapour-air mixtures. For substances this might be the case for halogenated hydrocarbons and for mixtures this might be the case due to a volatile flammable component or due to the loss of a volatile non-flammable component.

Substances or mixtures which do not show a flash point but do have an explosion range or may become flammable in use have to be labelled with EUH018.

Annex II: 2.9. Liquid mixtures containing halogenated hydrocarbons

For liquid mixtures which show no flashpoint or a flashpoint higher than 60 °C but not more than 93 °C and contain a halogenated hydrocarbon and more than 5 % highly flammable or flammable substances, the label on the packaging shall bear one of the following statements, depending on whether the substances referred to above are highly flammable or flammable:

EUH209 — 'Can become highly flammable in use' or

EUH209A — 'Can become flammable in use'

Note: EUH209 and EUH209A are limited to special types of mixtures whereas EUH018 covers a wider range of mixtures. In the majority of cases EUH018 covers EUH209 and EUH209A. Information about testing can be found in Section 3.7.4.4 paragraph 5.

3.7.6. ~~Relation to transport classification~~ Re-classification of substances and mixtures classified as flammable liquids according to DSD and DPD or already classified for transport

~~3.7.6.1. Relation to transport classification~~

Class 3 of the UN RTDG Model Regulations and the modal transport regulations (ADR, RID, ADN and IMDG Code, ICAO TI) cover flammable liquids based on the same criteria as the CLP hazard class flammable liquids. In general there is a correspondence between transport packing groups and CLP hazard categories but with exceptions. ~~However, in many cases specific exceptions apply.~~

Further, the UN RTDG Model Regulations cover substances and mixtures transported above their flash point ~~and desensitized explosives~~. In practice the information on flash point and boiling point needed for classification is available and it is recommended to classify based on the data rather than use direct translation. ~~See Annex VII for additional information on transport classification in relation to CLP classification.~~

3.7.7. Example of classification for flammable liquids

3.7.7.1. Example of substances and mixtures fulfilling the classification criteria

3.7.7.1.1. Example 1

MIXTURE OF: N-BUTYLACETATE + P-XYLENE + 1,3,5-TRIMETHYLBENZENE

(7.9 MOL % + 60.3 MOL % + 31.7 MOL %)	
Initial boiling point (calculated):	140 °C
Flash point (calculated):	26 °C
calculated flash point is within 5 °C to the limiting value of 23 °C	
⇒ flash point has to be measured.	
Dyn. Viscosity at 20 °C (DIN 53019):	8 mPa·s
Flash point (EN ISO 3679):	30.0 °C
⇒ According to boiling point and measured flash point result: Flam. Liq. Category 3	

1297

1298 3.7.7.1.2. Example 2

HYDROCARBONS AND DICHLOROMETHANE (70 VOL % + 30 VOL %)	
Initial Boiling point (calculated):	52 °C
Flash point:	no flash point according to a standard
⇒ Because the hydrocarbon part of the mixture has a flash point by itself (- 12 °C) the question 'Is an explosive vapour/air mixture possible' (EN 1839 as amended, EN 15794 as amended) or 'Can it become highly flammable / flammable during use?' has to be answered.	
Answer: Yes an explosion range exists; yes it can become highly flammable during use.	
⇒ According to the answer, the mixture has to be labelled with EUH018 or EUH209	
Note 1: In that case EUH018 covers EUH209	
Note 2: The EUH018 must only be assigned if the substance or mixture is classified as hazardous (Article 25 (1) of CLP)	
Cannot be classified as flammable liquid because the mixture has no flash point.	

1299

1300 3.7.7.2. Example of substances and mixtures not fulfilling the classification
1301 criteria

1302 3.7.7.2.1. Example 3

AQUEOUS FORMULATION OF ALIPHATIC POLYURETHANE RESIN	
Boiling point (EC 440/2008, EU test method A.2):	92 °C
Dyn. Viscosity at 20 °C (DIN 53019 as amended):	1938 mPa·s
Sample is highly viscous, use low heating rate for flash point determination (1 °C /min).	
Flash point (EN ISO 13736 as amended):	42.5 °C

Sustained combustibility test (UN-MTC L.2) at 60.5 °C:	combustion not sustained
Sustained combustibility test (UN-MTC L.2) at 75 °C:	combustion not sustained
⇒ According to the flash point result: Category 3	
However, does not necessarily have to be classified as flammable liquid Category 3 because it did not sustain combustion.	

3.7.8. References

Brandes, E. and Möller, W.: *Safety Characteristic Data*, Volume 1, Flammable gases and liquids, nw-Verlag, 2008

~~William M.~~ Haynes ~~William M.~~ et al. (2012) *CRC Handbook of Chemistry and Physics 93rd Edition*. CRC Press, Taylor and Francis, Boca Raton, FL

O'Neil, M., ~~aryadele~~ J. et al. © (2016, 2012) *The Merck Index - An Encyclopedia of Chemicals, Drugs, and Biologicals* (14th Edition – Version 14.9). Merck Sharp & Dohme Corp., a subsidiary of Merck & Co., Inc.

3.8. Flammable solids

3.8.1. Introduction

The criteria for 'Flammable solids' are found in Annex I, Section 2.7 of CLP and are identical to those in Chapter 2.7 of GHS⁴.

3.8.2. Definitions and general considerations for classification of flammable solids

Annex I: 2.7.1.1. A flammable solid means a solid which is readily combustible, or may cause or contribute to fire through friction.

Readily combustible solids are powdered, granular, or pasty substances or mixtures which are dangerous if they can be easily ignited by brief contact with an ignition source, such as a burning match, and if the flame spreads rapidly.

Special consideration on particle size

Annex I: 2.7.2.3.

[...]

Note 1: The test shall be performed on the substance or mixture in its physical form as presented. If for example, for the purposes of supply or transport, the same chemical is to be presented in a physical form different from that which was tested and which is considered likely to materially alter its performance in a classification test, the substance shall also be tested in the new form.

[...]

The finer the particle size of a solid substance or mixture, the greater the area exposed to air will be, and since flammability is a reaction with the oxygen in air, the particle size will greatly influence the ability to ignite. Hence it is very important that flammable properties for solids are investigated on the substance or mixture as it is actually presented (including how it can reasonably be expected to be used, see Article 8(6) of CLP). This is indicated by the Note cited in CLP Annex I, 2.7.2.3. For further information please see Section [Error! Reference source not found.](#) within this Guidance.

3.8.3. Relation to other physical hazards

Explosives, organic peroxides, self-reactive substances and mixtures as well as pyrophoric or oxidising solids should normally not be considered for classification as flammable solids ~~since flammability is an intrinsic hazard in these classes.~~

~~However, flammable solids can present other physical hazards at the same time, i.e.g. they might be self-heating or corrosive to metals or emit flammable gases in contact with water.~~

For flammable solids that are packaged in aerosol dispensers, see Section [3.4](#), Aerosols. If classified as ~~flammable~~ aerosols, they must not be classified as flammable solids in addition ~~(see Section 2.7).~~

3.8.4. Classification of substances and mixtures as flammable solids

3.8.4.1. Identification of hazard information

For the classification of a substance or mixture as a flammable solid data on the following properties are needed:

- melting point;
- information on water reactivity due to wetted zone in the test;
- information on flash point for solids containing flammable liquids.

If a solid with a low melting point is handled in the molten state, additional data such as flash point are generally necessary (see Articles 5(1), 6(1) and 8(6)).

See also *IR & CSA, Chapter R.7a: Endpoint specific guidance*, Section R.7.1.2 (Melting/freezing point), R.7.1.9 (Flash point).

Metal powders (which are powders of metals or metal alloys) may be (highly) flammable depending on their reactivity and particle size. However, most other inorganic solids are not flammable and hence are not classified as flammable solids. Many organic solid substances or mixtures fulfil the criteria to be classified as flammable solids. For inorganic solids, the classification as flammable is rather rare.

3.8.4.2. Screening procedures and waiving of testing

In general, a possible classification as a flammable solid should be considered for any solid organic substance or mixture containing such material. For inorganic material, testing may be waived in cases where the substance is fully oxidized or commonly known to be not flammable (i.e. stable salts or metal oxides) or where a flammability hazard can be excluded by any other scientific reasoning. In many cases, a simple screening test (see Section [3.8.4.4](#)) can be used to determine whether a solid should be classified as flammable. Solid substances and mixtures are classified as flammable according to their burning behaviour.

The test method as described in Part III, Sub-section 33.2.1-4.3.1 in the UN-MTC should be

Table 2.7.1 **Criteria for flammable solids**

Category	Criteria
1	<p><i>Burning rate test</i></p> <p><i>Substances and mixtures other than metal powders:</i></p> <p>(a) <i>wetted zone does not stop fire and</i></p> <p>(b) <i>burning time < 45 seconds or burning rate > 2,2 mm/s</i></p> <p><i>Metal powders:</i></p> <p><i>burning time ≤ 5 minutes</i></p>
2	<p><i>Burning rate test</i></p> <p><i>Substances and mixtures other than metal powders:</i></p> <p>(a) <i>wetted zone stops the fire for at least 4 minutes and</i></p> <p>(b) <i>burning time < 45 seconds or burning rate > 2,2 mm/s</i></p> <p><i>Metal powders:</i></p> <p><i>burning time > 5 minutes and ≤ 10 minutes</i></p>
[...]	
Note 2: Aerosols shall not be classified as flammable solids; see section 2.3.	

3.8.4.4. Testing and evaluation of hazard information

For safety reasons, it is advisable to test for explosive and self-reactive properties first and to rule out pyrophoric behaviour before performing this test. The classification test is described in Part III, Sub-section 33.2.1-4.3.2 of the UN-MTC. The sample should be tested in its commercially relevant form. Special care has to be taken that the sample forms an unbroken strip or powder train in the test mould. Large pieces that do not fit into the mould should be gently crushed. For pasty or sticking substances it may be helpful to line the mould with a thin plastic foil which is withdrawn after having formed the train. A small gas burner with a non-luminous flame has proven most practical as ignition source; see UN-MTC section 33.2.4.3.1. In order to detect also smouldering behaviour, it is advisable to dim the light in the lab hood during the experiment.

Classification is based upon the fastest burning rate / shortest burning time obtained in six test runs, unless a positive result is observed earlier. For substances and mixtures other than metal powders, the category is assigned depending on whether the wetted zone is able to stop the flame: if the flame passes the wetted zone in at least one trial Category 1 is assigned.


In case the flame propagates rapidly (less than 20 seconds for 100 mm) it is advisable to check for explosive or self-reactive properties. Another possible reason is the presence of flammable liquids in the sample, in which case, labelling with the statement EUH018 — 'In use, may form flammable/explosive vapour-air mixture' in agreement with Article 25 of CLP is applicable, in addition.

1389 3.8.4.5. Decision logic

1390 Classification of flammable solids is done according to Figure 4 (equivalent to decision logic
1391 2.7.4 as included in the GHS in GHS v.7).

NOTE: The person responsible for the classification of flammable solids should be experienced in this field and be familiar with the criteria for classification.

1392 Figure 4: Decision logic for flammable solids (Decision logic 2.7 of GHS)

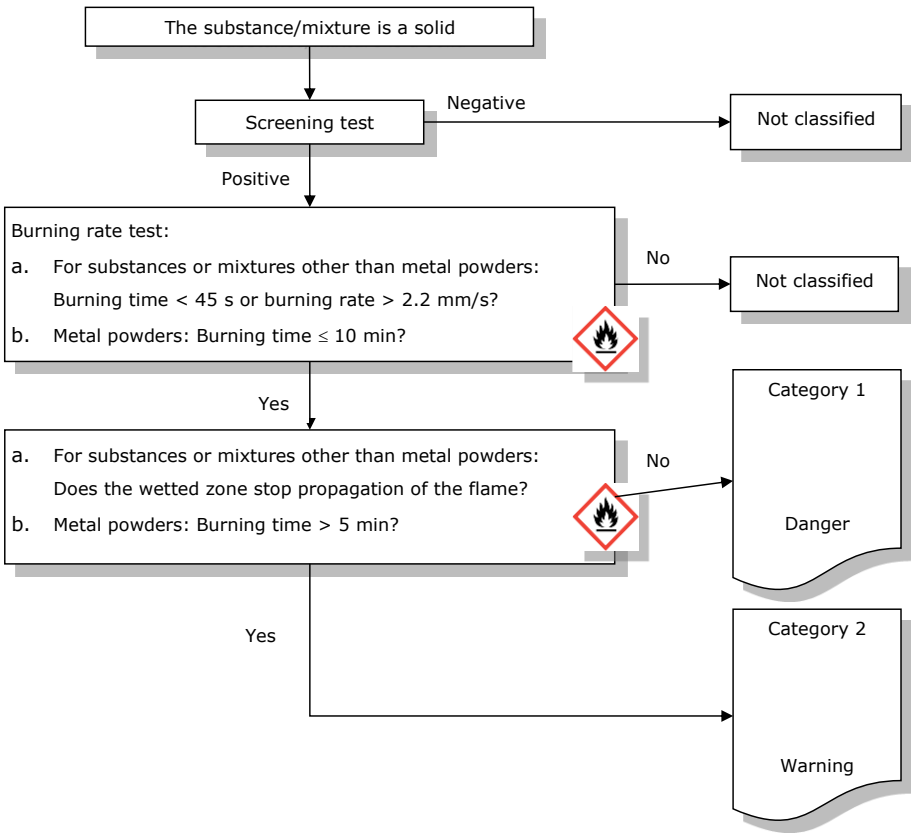



1395 **3.8.5. Hazard communication for flammable solids**

1396 **3.8.5.1. Pictograms, signal words, hazard statements and precautionary**
 1397 **statements**

Annex I: 2.7.3. Table 2.7.2

Label elements for flammable solids

Classification	Category 1	Category 2
GHS Pictograms		
Signal Word	Danger	Warning
Hazard Statement	H228: Flammable Solid	H228: Flammable Solid
Precautionary Statement Prevention	P210 P240 P241 P280	P210 P240 P241 P280
Precautionary Statement Response	P370 + P378	P370 + P378
Precautionary Statement Storage		
Precautionary Statement Disposal		

1398 The wording of the Precautionary Statements is found in CLP Annex IV, Part 2.

1399 **3.8.6. Relation to transport classification**

1400 Division 4.1 within Class 4 of the UN RTDG Model Regulations covers flammable ~~substances~~
 1401 ~~solids~~, solid desensitized explosives, ~~and~~ self-reactive ~~substances~~ (liquids or solids) ~~and~~
 1402 ~~polymerizing substances and mixtures~~. If a transport classification according to the modal
 1403 transport regulations (ADR, RID, ADN and IMDG Code, ICAO TI) is available it should be kept in
 1404 mind that transport classification is based on prioritisation of hazards (see UN RTDG Model
 1405 Regulations, Section 2.0.3) and that flammable solids have a relatively low rank in the
 1406 precedence of hazards. Therefore, the translation from transport classification to CLP should be
 1407 only done if a transport classification for a flammable solid is explicitly available. The conclusion
 1408 that a substance or mixture not classified as a flammable solid for transport should not be
 1409 classified as a flammable solid according to CLP is, in general, not correct. See Annex VII for
 1410 additional information on transport classification in relation to CLP classification.

1411 **3.8.7. Example of classification for flammable solids**

1412 **3.8.7.1. Example of substances and mixtures fulfilling the classification**
 1413 **criteria**

1414 The following example shows a classification based on test data:

TEST SUBSTANCE: 'FLAMMALENE' (ORGANIC MATERIAL, SOLID)

Screening test (VDI 2263, part 1):	burning index: 5 (burning with an open flame or emission of sparks)
Conclusion: Substance is candidate for classification as a flammable solid, further testing required.	
UN Test N.1 (Test method for readily combustible solids):	<p>Burning times for a distance of 100 mm (6 runs): 44 s; 40 s; 49 s; 45 s; 37 s; 41 s.</p> <p>Shortest burning time is less than 45 s; substance is a flammable solid.</p> <p>Wetted zone stops the fire, no reignition.</p>
Conclusion: Classify as flammable solid, Category 2.	

3.8.7.2. Example of substances and mixtures not fulfilling the classification criteria

Many inorganic salts and oxides are not flammable such as NaCl, NaBr, KI, FeO, MnO etc.

Urea or phthalic acid anhydride are examples of organic substances that would not be classified as flammable solids.

3.8.8. References

VDI guideline 2263, part 1, 1990, *Test methods for the Determination of the Safety Characteristics of Dusts*

3.9. Self-reactive substances and mixtures

3.9.1. Introduction

The criteria for 'Self-reactive substances and mixtures' are found in Annex I, Section 2.8 of CLP and are identical to those in Chapter 2.8 of GHS⁴.

In general, substances or mixtures classified as self-reactive substances and mixtures can decompose strongly exothermically when 50 kg are exposed to temperatures of 75 °C or lower depending on the Self-Accelerating Decomposition Temperature (SADT) of the substance or mixture.

Self-reactive substances and mixtures display a very wide range of properties. The most hazardous type is TYPE A of self-reactive substances and mixtures that, based on their violent their decomposition behaviour, are too dangerous to transport commercially though they can be stored safely with appropriate precautions. At the other end of the scale this classification includes substances and mixtures that only decompose very slowly. Further at temperatures well above the normal storage and transport temperatures (e.g. 75 °C).

The decomposition of self-reactive substances and mixtures can be initiated by heat, contact with catalytic impurities (e.g. acids, heavy-metal compounds, and bases), friction or impact. The rate of decomposition increases with temperature and varies with the substance or mixture. Decomposition, particularly if no ignition occurs, may result in the evolution of toxic gases or vapours. For certain self-reactive substances and mixtures, the temperature must be controlled during storage and handling. Some self-reactive substances and mixtures may decompose explosively, particularly if confined. This characteristic may be modified by the addition of

1445 diluents or by the use of appropriate packaging. Some self-reactive substances and mixtures
1446 burn vigorously. ~~Self-reactive substances are, for example, some compounds of the types listed~~
1447 ~~below:~~

- 1448 ~~a. Aliphatic azo compounds ($\text{C}-\text{N}=\text{N}-\text{C}$);~~
- 1449 ~~b. Organic azides ($\text{C}-\text{N}_3$);~~
- 1450 ~~c. Diazonium salts (CN_2^+Z^-);~~
- 1451 ~~d. N-nitroso compounds ($\text{N}-\text{N}=\text{O}$); and~~
- 1452 ~~e. Aromatic sulfonylhydrazides ($\text{SO}_2-\text{NH}-\text{NH}_2$).~~

1453 ~~This list is not exhaustive and substances with other reactive groups, combination of groups and~~
1454 ~~some mixtures of substances may have similar properties. Additional guidance on substances~~
1455 ~~which may have self-reactive properties, is given in Appendix 6, Section 5.1 of the UN-MTC.~~

1456 Additional hazardous properties, resulting in subsidiary labelling, are indicated in the list of
1457 already classified self-reactive substances and mixtures included in the UN RTDG Model
1458 Regulations, Section 2.4.2.3.2.3.

1459 Commercial self-reactive substances and mixtures are commonly formulated by dilution with
1460 solid and liquid substances with which they are compatible.

1461 **3.9.2. Definitions and general considerations for classification of self-reactive**
1462 **substances and mixtures**

1463 In CLP the following definition is given for self-reactive substances and mixtures:

Annex I:

2.8.1.1. Self-reactive substances or mixtures are thermally unstable liquid or solid substances or mixtures liable to undergo a strongly exothermic decomposition even without participation of oxygen (air). This definition excludes substances and mixtures classified according to this Part as explosives, organic peroxides or as oxidising.

2.8.1.2. A self-reactive substance or mixture is regarded as possessing explosive properties when in laboratory testing the formulation is liable to detonate, to deflagrate rapidly or to show a violent effect when heated under confinement.

1464 General considerations

Annex I: 2.8.3. Hazard communication

Type G has no hazard communication elements assigned but shall be considered for properties belonging to other hazard classes.

1465 **3.9.3. Relation to other physical hazards**

1466 Neither the burning properties nor the sensitivity to impact and friction form part of the
1467 classification procedure for self-reactive substances and mixtures in CLP. These properties may
1468 be of importance in safe handling of self-reactive substances and mixtures (see additional tests
1469 in Section 3.9.4.4).

1470 In addition, the following should be noted:

Explosive properties

The explosive properties do not have to be determined according to the CLP Annex I, Chapter 2.1, because explosive properties are incorporated in the classification as decision logic for self-reactive substances and mixtures, see CLP Annex I, 2.8.2.1 (a). Note that substances and mixtures may have explosive properties when handled under higher confinement.

3.9.4. Classification of substances and mixtures as self-reactive substances and mixtures

3.9.4.1. Identification of hazard information

The classification of a self-reactive substance or mixture in one of the seven categories 'types A to G' is dependent on its detonation, deflagration and thermal explosion properties, its response to heating under confinement, its explosive power and the concentration and the type of diluent added to desensitize the substance or mixture. Specifications of acceptable diluents that can be used safely are given in the UN RTDG Model Regulations, Section 2.4.2.3.5.

The classification of a self-reactive substance or mixture as type A, B or C is also dependent on the type of packaging in which the substance or mixture is tested as it affects the degree of confinement to which the substance or mixture is subjected. This has to be considered when handling the substance or mixture; stronger packaging may result in more violent reactions when the substance or mixture decomposes. This is why it is important that storage and transport is done in packaging, allowed for the type of self-reactive substance and mixture, that conforms the requirements of the UN-packaging or IBC instruction (P520/IBC520) or tank instruction (T23).

3.9.4.2. Screening procedures and waiving of testing

The CLP text comprises the following screening considerations.

Annex I: 2.8.4.2 Additional Classification Considerations

The classification procedures for self-reactive substances and mixtures need not be applied if:

(a) There are no chemical groups present in the molecule associated with explosive or self reactive properties. Examples of such groups are given in Tables A6.1 and A6.2¹³ in Appendix 6 of the UN RTDG, Manual of Tests and Criteria; or

(b) For a single organic substance or a homogeneous mixture of organic substances, the estimated SADT for a 50 kg package is greater than 75 °C or the exothermic decomposition energy is less than 300J/g. The onset temperature and decomposition energy can be estimated using a suitable calorimetric technique (see Part II, sub-section 20.3.3.3 of the UN RTDG, Manual of Tests and Criteria).

Self-reactive substances are, for example, some compounds of the types listed below:

a. Aliphatic azo compounds (-C-N=N-C-);

b. Organic azides (-C-N₃);

c. Diazonium salts (-CN₂⁺Z⁻);

¹³ This note is not part of the legal text: following an update of Appendix 6 of the UN-MTC, the correct table reference is A6.3 instead of A6.2 as indicated in the CLP Regulation.

- 1498 d. N-nitroso compounds (-N-N=O); and
- 1499 e. Aromatic sulfohydrazides (-SO₂-NH-NH₂).
- 1500 This list is not exhaustive and substances with other reactive groups, combination of groups and
- 1501 some mixtures of substances may have similar properties. Additional guidance on substances,
- 1502 which may have self-reactive properties, is given in Appendix 6, Section 5.1 of the UN-MTC.
- 1503 For examples of chemical groups associated with explosive properties please refers to the
- 1504 screening procedure under explosives, see Reference.
- 1505 **3.9.4.2-3.9.4.3. Classification criteria**
- 1506 According to CLP, substances and mixtures must be considered for classification in this hazard
- 1507 class as a self-reactive substance or mixture unless:

Annex I:

2.8.2.1. Any self-reactive substance or mixture shall be considered for classification in this class as a self-reactive substance or mixture unless:⁽¹⁾

- (a) they are explosives, according to the criteria given in 2.1;
- (b) they are oxidising liquids or solids, according to the criteria given in 2.13 or 2.14, except that mixtures of oxidising substances, which contain 5 % or more of combustible organic substances shall be classified as self-reactive substances according to the procedure defined in 2.8.2.2;
- (c) they are organic peroxides, according to the criteria given in 2.15;
- (d) their heat of decomposition is less than 300 J/g; or
- (e) their self-accelerating decomposition temperature (SADT) is greater than 75 °C for a 50 kg package⁽¹⁾ (See UN RTDG, Manual of Test and Criteria, sub-sections 28.1, 28.2, 28.3 and Table 28.3.)

2.8.2.2. Mixtures of oxidising substances, meeting the criteria for classification as oxidising substances, which contain 5 % or more of combustible organic substances and which do not meet the criteria mentioned in (a), (c), (d) or (e) in 2.8.2.1, shall be subjected to the self-reactive substances classification procedure;

Such a mixture showing the properties of a self-reactive substance type B to F (see 2.8.2.3) shall be classified as a self-reactive substance.

[...]

⁽¹⁾ See UN RTDG, Manual of Test and Criteria, sub-sections 28.1, 28.2, 28.3¹⁴ and Table 28.3.

- 1508 ~~In addition to the above, substances and mixtures must be considered for classification in this~~
- 1509 ~~hazard class unless:~~

~~Annex I: 2.8.4.2-~~

~~[...]~~

¹⁴ This note is not part of the legal text: UN-MTC sub-sections 28.4 includes Test Series H description (SADT texts).

~~(a) There are no chemical groups present in the molecule associated with explosive or self-reactive properties; examples of such groups are given in Tables A6.1 and A6.2 in Appendix 6 of the UN RTDG, Manual of Tests and Criteria.~~

~~{...}~~

1510 In the CLP decision logic (see Section [3.9.4.5](#)), classification of self-reactive substances or
1511 mixtures is based on performance based testing in both small scale tests and, where necessary,
1512 some larger scale tests with the substance or mixture in its packaging. The concept of 'intrinsic
1513 properties' is, therefore, not necessarily, applicable to this hazard class.

1514 Self-reactive substances or mixtures are classified in one of the seven categories of 'types A to
1515 G' according to the classification criteria given in Section 2.8.2.3 of Annex I, CLP. The
1516 classification principles are given in the decision logic in Figure 2.8.1 of CLP (see Section [3.9.4.5](#))
1517 and the Test Series A to H, as described in the Part II of the UN-MTC, should be performed.

Annex I: 2.8.2.3. Self-reactive substances and mixtures shall be classified in one of the seven categories of 'types A to G' for this class, according to the following principles:

- (a) any self-reactive substance or mixture which can detonate or deflagrate rapidly, as packaged, shall be defined as self-reactive substance TYPE A;
- (b) any self-reactive substance or mixture possessing explosive properties and which, as packaged, neither detonates nor deflagrates rapidly, but is liable to undergo a thermal explosion in that package shall be defined as self-reactive substance TYPE B;
- (c) any self-reactive substance or mixture possessing explosive properties when the substance or mixture as packaged cannot detonate or deflagrate rapidly or undergo a thermal explosion shall be defined as self-reactive substance TYPE C;
- (d) any self-reactive substance or mixture which in laboratory testing:
 - (i) detonates partially, does not deflagrate rapidly and shows no violent effect when heated under confinement; or
 - (ii) does not detonate at all, deflagrates slowly and shows no violent effect when heated under confinement; or
 - (iii) does not detonate or deflagrate at all and shows a medium effect when heated under confinement;shall be defined as self-reactive substance TYPE D;
- (e) any self-reactive substance or mixture which, in laboratory testing, neither detonates nor deflagrates at all and shows low or no effect when heated under confinement shall be defined as self-reactive substance TYPE E;
- (f) any self-reactive substance or mixture which, in laboratory testing, neither detonates in the cavitated state nor deflagrates at all and shows only a low or no effect when heated under confinement as well as low or no explosive power shall be defined as self-reactive substance TYPE F;
- (g) any self-reactive substance or mixture which, in laboratory testing, neither detonates in the cavitated state nor deflagrates at all and shows no effect when heated under confinement nor any explosive power, provided that it is thermally stable (SADT is 60 °C to 75 °C for a 50 kg package), and, for liquid mixtures, a diluent having a boiling point not less than 150 °C is used for desensitisation shall be defined as self-reactive substance TYPE G. If the mixture is not thermally stable or a diluent having a boiling point less than 150 °C is used for desensitisation, the mixture shall be defined as self-reactive substance TYPE F.

Where the test is conducted in the package form and the packaging is changed, a further test shall be conducted where it is considered that the change in packaging will affect the outcome of the test.

1518 A list of currently classified self-reactive substances and mixtures is included in the UN RTDG
1519 Model Regulations, Section 2.4.2.3.2.3.

~~3.9.4.3~~ 3.9.4.4. Testing and evaluation of hazard information

~~3.9.4.3.1~~ 3.9.4.4.1. Thermal stability and temperature control

In addition to the classification tests given in decision logic Figure 2.8.1 of CLP, the thermal stability of the self-reactive substances and mixtures has to be assessed in order to determine the SADT.

The SADT is defined as the lowest temperature at which self-accelerating decomposition of a substance or mixture may occur in the packaging as used in transport, handling and storage. It should be emphasized that the SADT is dependent on the nature of the self-reactive substance or mixture itself, together with the volume and heat-loss characteristics of the packaging or vessel in which the substance or mixture is handled. The temperature at which self-accelerating decomposition occurs falls:

- as the size of the packaging or vessel increases; and
- with increasing efficiency of the insulation on the package or vessel.

The SADT is a measure of the combined effect of the ambient temperature, decomposition kinetics, package size and the heat transfer properties of the substance or mixture and its packaging.

There is no relation between the SADT of a self-reactive substance and mixture and its classification in one of the seven categories 'types A to G'. The SADT is used to derive safe handling, storage and transport temperatures (control temperature) and alarm temperature (emergency temperature).

Depending on its SADT a self-reactive substance and mixture needs temperature control and the rules as given in CLP Annex I, 2.8.2.4, consist of the following two elements:

1. Criteria for temperature control:
2. Self-reactive substances and mixtures need to be subjected to temperature control when the SADT is $\leq 55^{\circ}\text{C}$.
3. Derivation of control and emergency temperatures:

Type of receptacle	SADT*	Control temperature	Emergency temperature
Single packaging ^S and IBC's	20 °C or less	20 °C below SADT	10 °C below SADT
	over 20 °C to 35 °C	15 °C below SADT	10 °C below SADT
	over 35 °C	10 °C below SADT	5 °C below SADT
Tanks	< 50 °C	10 °C below SADT	5 °C below SADT

*i.e. the SADT of the substance/mixture as packaged for transport, handling and storage.

~~It should be emphasized that the SADT is dependent on the nature of the self-reactive substance or mixture itself, together with the volume and heat-loss characteristics of the packaging or vessel in which the substance or mixture is handled. The temperature at which self-accelerating decomposition occurs falls:~~

- ~~• as the size of the packaging or vessel increases; and~~
- ~~• with increasing efficiency of the insulation on the package or vessel.~~

The SADT is only valid for the substance or mixture as tested and when handled properly. Mixing the self-reactive substances and mixtures with other chemicals, or contact with incompatible materials (including incompatible packaging or vessel material) may reduce the thermal stability due to catalytic decomposition, and lower the SADT. This may increase the risk of decomposition and has to be avoided.

3.9.4.3.2-3.9.4.4.2. Additional consideration and testing

Explosive properties

The sensitivity of self-reactive substances and mixtures to impact (solids and liquids) and friction (solids only) may be of importance for the safe handling of the substances and mixtures, in the event that these substances and mixtures have pronounced explosive properties (e.g. rapid deflagration and/or violent heating under confinement). Test methods to determine these properties are described in Test Series 3 (a) (ii) and 3 (b) (i) of the UN-MTC. This information ~~should~~may be documented in the SDS.

Burning properties

Although there are currently no dedicated storage guidelines for self-reactive substances and mixtures (although in some countries under development), often the regulations for organic peroxides are referred to. For storage classification the burning rate is commonly used, see Section [3.16](#) on organic peroxides.

Flash point

The flash point for liquid self-reactive substances or mixtures is only relevant in the temperature range where the product is thermally stable. Above the SADT of the self-reactive substance or mixture, flash point determination is not relevant because decomposition products are evolved.



NOTE: In case a flash point determination seems reasonable (expected flash point below the SADT) a test method using small amount of sample is recommended. In case the self-reactive substance or mixture is diluted or dissolved, the diluent may determine the flash point.

Auto-ignition temperature

The determination of the auto ignition temperature is not relevant for self-reactive substances and mixtures, because the vapours decompose during the execution of the test. Available test methods are for non-decomposing vapour phases. Auto ignition of vapours of self-reactive substance and mixtures ~~vapours~~ when they decompose, can never be excluded. This information should be documented in the SDS.

Self-ignition temperature

~~The determination of the~~ Also self-ignition temperature ~~determination~~ (test applicable for solids) is not relevant.

-The thermal stability of self-reactive substances and mixtures is quantitatively given by the SADT test.

Control and Emergency temperatures

The Control and Emergency temperatures are based on the SADT as determined by UN Test Series H.4. In UN Test Series H.2 and H.3, the heat loss applied in the calculating the SADT should be representative for the packaging, IBC, tank or vessel in which the substance or mixture is handled or stored. In UN Test H.4, the Dewar vessel used in the UN Test H.4 is supposed to

be representative for the substance or mixture handled in packages. For handling of the substance or mixture in larger quantities (IBCs/tanks/vessels etc.) and/or in better (thermally) insulated containers under more thermal insulated conditions, the SADT has to be determined for that quantity with the given degree of insulation. From that SADT the Control and Emergency temperatures can be derived (see also Section 3.16.4.3.1)

3.9.4.3.3.3.9.4.4.3. Additional classification considerations

Currently, the following properties are not incorporated in the classification of self-reactives under the CLP:

- mechanical sensitivity i.e. impact and friction sensitivity (for handling purposes);
- burning properties (for storage purposes);
- flash point for liquids; and
- burning rate for solids.

In addition to the GHS criteria CLP mentions that:

Annex I: 2.8.2.2


[...]

Where the test is conducted in the package form and the packaging is changed, a further test shall be conducted where it is considered that the change in packaging will affect the outcome of the test.


Please note that polymerising substances do not fulfil the criteria for classification as self-reactives. In transport regulations, they are classified as polymerising substances. It is not contained in GHS and therefore not incorporated in CLP. However, there are on-going discussions at the UNSCEGHS on this subject.


3.9.4.4.3.9.4.5. Decision logic

Classification of self-reactive substances and mixtures is done according to decision logic 2.8 as included in the GHS.

 NOTE: The person responsible for the classification of self-reactive substances and mixtures should be experienced in this field and be familiar with the criteria for classification.

1612 **Figure 2.5—Decision logic 2.8 for self-reactive substances and mixtures**

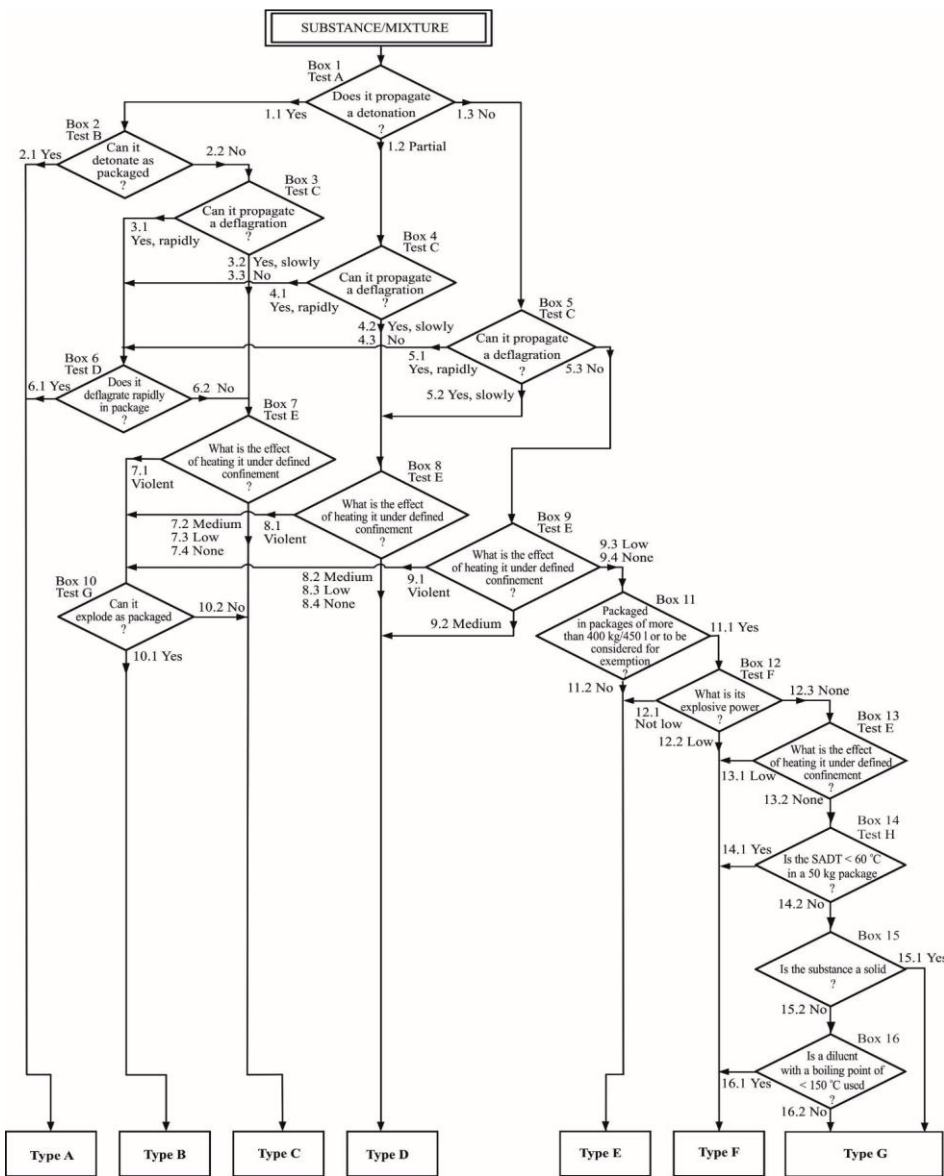

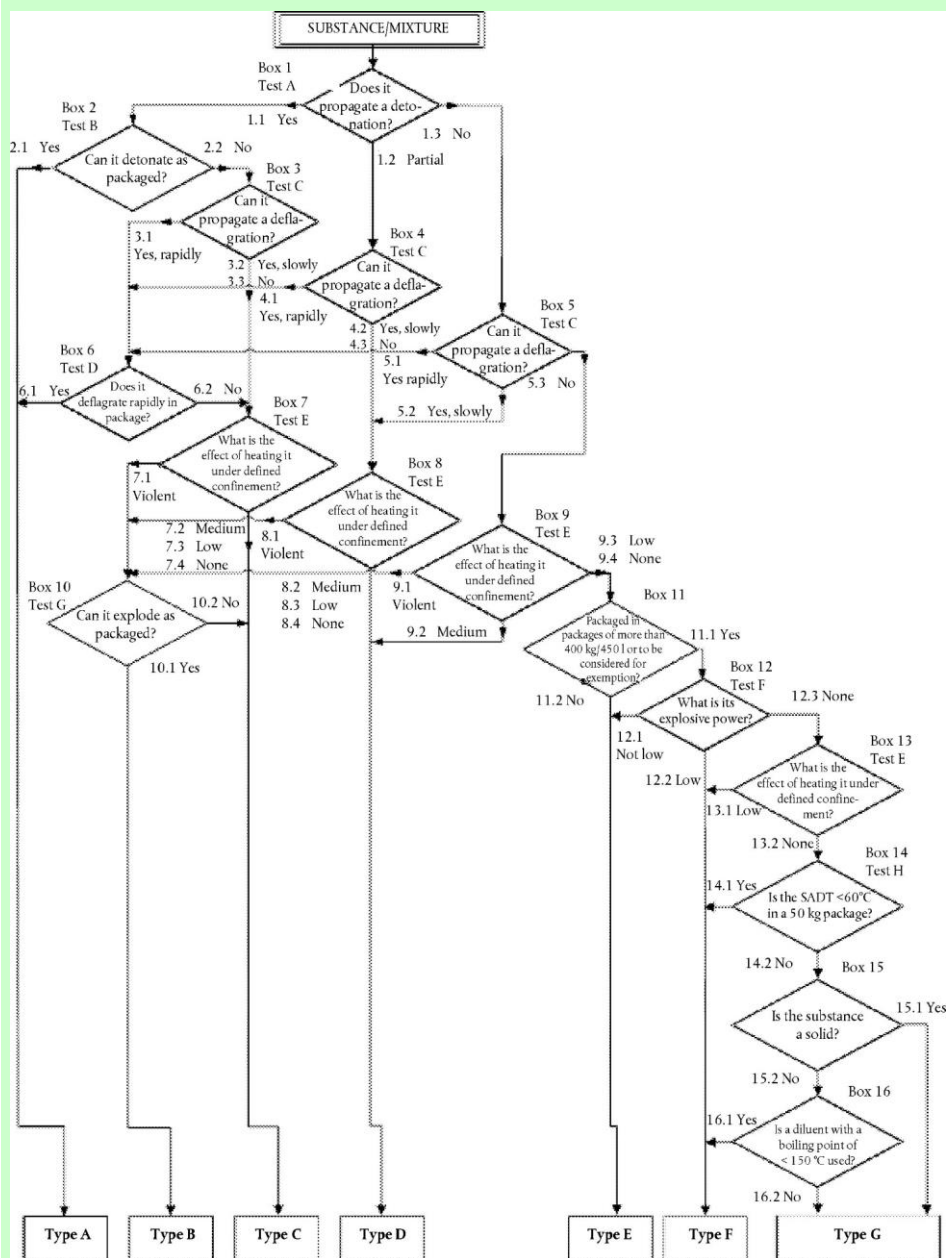Annex I: Figure 2.8.1 Self-reactive substances and mixtures






3.9.5. Hazard communication for self-reactive substances and mixtures

3.9.5.1. Pictograms, signal words, hazard statements and precautionary statements

According to CLP the following label elements must be used for substances and mixtures meeting the criteria for this hazard class:

Annex I: Table 2.8.1

Label elements for self-reactive substances and mixtures

Classification	Type A	Type B	Type C & D	Type E & F	Type G ⁽²⁾
GHS pictograms		 			There are no label elements allocated to this hazard category
Signal Word	Danger	Danger	Danger	Warning	
Hazard Statement	H240: Heating may cause an explosion	H241: Heating may cause a fire or explosion	H242: Heating may cause a fire	H242: Heating may cause a fire	
Precautionary statement	P210	P210	P210	P210	
Prevention	P234	P234	P234	P234	
	P235	P235	P235	P235	
	P240	P240	P240	P240	
	P280	P280	P280	P280	
Precautionary statement	P370 + P372 + P380 + P373	P370 + P380 + P375 [+P378] ⁽²⁾	P370 + P378	P370 + P378	
Response					
Precautionary statement	P403	P403	P403	P403	
Storage	P411	P411	P411	P411	
	P420	P420	P420	P420	

Precautionary statement	P501	P501	P501	P501	
Disposal					
<div><div>¹ See the introduction to Annex IV for details on the use of square brackets.</div><div>⁽¹⁾² Type G has no hazard communication elements assigned but should be considered for properties belonging to other hazard classes.</div><div>⁽²⁾ See the introduction to Annex IV for details on the use of square brackets.</div></div>					

1619 The wording of the Precautionary Statements is found in CLP Annex IV, Part 2.

1620 **3.9.6. Relation to transport classification ~~to DSD and DPD or already~~**
1621 **~~classified for transport~~**

1622 Division 4.1 within Class 4 of the UN RTDG Model Regulations covers flammable ~~substances~~
1623 ~~solids, self-reactive substances,~~ solid desensitized explosives and ~~polymerizing substances (not~~
1624 ~~being part of GHS and CLP)~~ ~~self-reactive liquids or solids~~. A list of already classified self-reactive
1625 substances is included in UN RTDG Model Regulations, Section 2.4.2.3.2.3. This table includes
1626 self-reactive substances of various types from type B to type F. See Annex VII for additional
1627 information on transport classification in relation to CLP classification.

1628 **3.9.7. Example of classification for self-reactive substances and mixtures**

1629 **3.9.7.1. Example of substances and mixtures fulfilling the classification**
1630 **criteria**

1631 Substance to be classified: NP

1632 Molecular formula: ~~NA~~ ~~not applicable~~

1633 According to CLP Annex I, Section 2.8.2.1, the substance has:

- 1634 • an energy content of 1452 kJ/kg; and
1635 • a SADT of 45 °C (in 50 kg package);

1636 and consequently it has to be considered for classification in the hazard class self-reactive
1637 substances and mixtures.

1638 Test results and classification according to CLP decision logic 2.8.1 for self-reactive substances
1639 and mixtures and the UN - MTC, Part II, is as follows:

1640


CLASSIFICATION TEST RESULTS	
1. Name of the self-reactive substance or mixture:	NP
2. General data	
2.1. Composition	NP, technically pure
2.2. Molecular formula	NA Not applicable

CLASSIFICATION TEST RESULTS		
2.3.	Physical form	s Solid, fine powder
2.4.	Colour	b Brown
2.5.	Density (apparent)	460 kg/m ³
3. Detonation (T test s Series A)		
Box 1 of the decision logic		Does the substance propagate a detonation?
3.1.	Method	UN Test A.1: BAM 50/60 steel tube test
3.2.	Sample conditions	t Technically pure substance
3.3.	Observations	f Fragmented part of the tube: 12, 18cm
3.4.	Result	No
3.5.	Exit	1.3
4. Deflagration (T test s Series C)		
Box 5 of the decision logic		Does the substance propagate a deflagration?
4.1.	Method 1	Time/pressure test (test C.1)
4.1.1.	Sample conditions	a Ambient temperature
4.1.2.	Observations	498, 966, 3395 ms
4.1.3.	Result	Yes, slowly
4.2.	Method 2	Deflagration test (test C.2)
4.2.1.	Sample conditions	T temperature: 20 °C
4.2.2.	Observations	d Deflagration rate: 0.90, 0.87 mm/s
4.2.3.	Result	Yes, slowly
4.3.	Final result	Yes, slowly
4.4.	Exit	5.2
5. Heating under confinement (T test s Series E)		
Box 8 of the decision logic:		What is the effect of heating it under defined confinement?
5.1.	Method 1	Koenen test (test E.1)
5.1.1.	Sample conditions	
5.1.2.	Observations	Limiting diameter: < 1.0 mm, fragmentation type 'A'
5.1.3.	Result	Low

CLASSIFICATION TEST RESULTS		
5.2.	Method 2	Dutch pressure vessel test (test E.2)
5.2.1.	Sample conditions	
5.2.2.	Observations	Limiting diameter: <1.0 mm (with 10 g), 1.0 mm (50 g)
5.2.3.	Result	H Low
5.3.	Final result	H Low
5.4.	Exit	8.3
6. Thermal stability (outside of the decision logic)		
6.1.	Method	Heat accumulation storage test (test H.4)
6.2.	Sample conditions:	m Mass 232.5 g. Half life time of cooling of Dewar vessel with 400 ml water: 10.0 hrs.(representing substance in package)
6.3.	Observations	S self-accelerating decomposition at 45 °C n No self-accelerating decomposition at 40 °C
6.4.	Result	SADT 45 °C (in 50 kg package)
7.	General remarks	The decision logic is given in Figure 5 Figure 2-6
8. Final classification		
Hazard / hazard class:		Self-reactive substance, Type D, solid, temperature controlled
Label		Flame (GHS02)
Signal word		Danger
Hazard statement		H242: Heating may cause a fire
Temperature control		Needed based on SADT (45 °C, in package)
Control temperature*		35 °C (in package)
Emergency temperature*		40 °C (in package)

*See UN-MTC, table 28.~~23~~.

Figure 5: Decision logic for self-reactive substance example: NP, technically pure

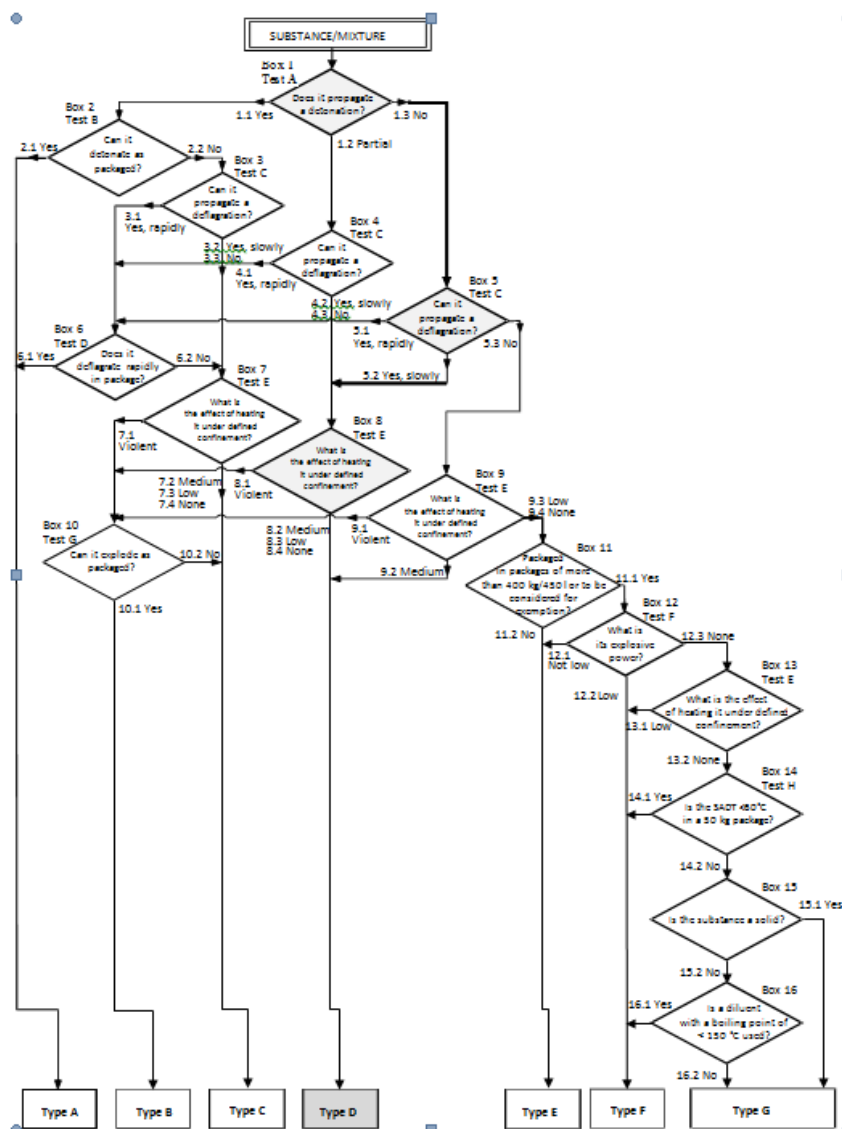

3.10. Pyrophoric liquids

3.10.1. Introduction

The criteria for 'Pyrophoric liquids' are found in Annex I, Section 2.9 of CLP and are identical to those in Chapter 2.9 of GHS⁴.

Pyrophoricity, i.e. the ability to spontaneously ignite in air, is the result of a reaction of a substance or mixture with the oxygen in the air **and it is a very dangerous property**. The reaction is exothermic and has the particularity that it starts spontaneously, i.e. without the aid of a supplied spark, flame, heat or other energy source. Another way of saying this is that the auto-ignition temperature for a pyrophoric substance or mixture is lower than room (ambient) temperature.

~~Organo-metals and organo-metalloids may be suspected of being pyrophores, as well as their derivatives. Also organo-phosphines and their derivatives, hydrides and their derivatives and haloacetylene derivatives may show pyrophoricity (Urban, 2007).~~

~~There are also pyrophoric substances or mixtures that do not belong to the above mentioned groups of chemicals, i.e. the list above is not exhaustive. Since pyrophoric substances or mixtures ignite spontaneously in air, pyrophoricity is a very dangerous property. In case of doubt it should therefore be thoroughly investigated whether a given substance or mixture is pyrophoric. More information on pyrophoric substances can e.g. be found in Bretherick's Handbook of Reactive Chemical Hazards (Urban, 2007).~~

3.10.2. Definitions and general considerations for classification of pyrophoric liquids

The definition in CLP for pyrophoric liquids is as follows:

Annex I: 2.9.1. Definition

Pyrophoric liquid means a liquid substance or mixture which, even in small quantities, is liable to ignite within five minutes after coming into contact with air.

3.10.3. Relation to other physical hazards

Pyrophoric substances and mixtures will react spontaneously with air already in small amounts and more or less instantaneously (within minutes). This differentiates them from self-heating substances and mixtures, which also react spontaneously with air but only when in larger amounts and after an extended period of time (hours or days). While liquids in themselves generally do not exhibit self-heating properties due to the limited contact with air (which can occur only at the surface), liquids that are adsorbed onto solid particles should, in general, be considered for classification in the hazard class self-heating substances and mixtures, see Chapter 3.12 of this guidance.

Pyrophoricity may be expected for certain reactive metals and some of their compounds (e.g. hydrides and other organo-metal compounds). Many of these substances and mixtures will also react vigorously with water under the production of flammable gases. Such substances and mixtures may thus be classified in the hazard class substances and mixtures which in contact with water emit flammable gases in addition, see Chapter 3.13 of this guidance. It should be noted in this context that water-reactive substances and mixtures may also to some extent react with the humidity in air, although such a reaction is seldom vigorous. A substance or mixture that spontaneously ignites in air in accordance with the test procedures is to be considered pyrophoric, regardless of the reaction mechanism.

Liquids not classified as pyrophoric but that can burn may belong to the hazard class flammable liquids depending on their flash point and ability to sustain combustion, see Section 3.7 of this guidance.

3.10.4. Classification of substances and mixtures as pyrophoric liquids

3.10.4.1. Identification of hazard information

Since the tests to determine pyrophoricity are simple and require no special equipment, see Section 3.10.4.4 below, there is in general no reason to go to data sources instead of performing tests. Furthermore, the possibilities of waiving tests are ample both for known pyrophores and for substances and mixtures known not to be pyrophoric, see Section 3.10.4.2 below. If information anyway is taken from literature or other data sources, it is of utmost importance that the correct physical form is considered, see Section 3.1.3. Naturally, all data sources should be carefully evaluated with regard to reliability and scientific validity.

3.10.4.2. Screening procedures and waiving of testing

Organo-metals and organo-metalloids may be suspected of being pyrophores, as well as their derivatives. Also organo-phosphines and their derivatives, hydrides and their derivatives and haloacetylene derivatives may show pyrophoricity. There are also pyrophoric substances or mixtures that do not belong to the above mentioned groups of chemicals, i.e. the list above is not exhaustive. In case of doubt it should therefore be thoroughly investigated whether a given substance or mixture is pyrophoric. More information on pyrophoric substances can, e.g., be found in Bretherick's Handbook of Reactive Chemical Hazards (Urban, 2007).

In case a liquid is known from practical handling to be pyrophoric no testing is necessary. Such liquids are classified as pyrophoric liquids without testing. This would also be the case if the liquid spontaneously ignites upon opening of the receptacle when trying to perform the tests for classification.

According to the additional classification considerations in CLP:

Annex I: 2.9.4.1. The classification procedure for pyrophoric liquids need not be applied when experience in manufacture or handling shows that the substance or mixture does not ignite spontaneously on coming into contact with air at normal temperatures (i.e. the substance or mixture is known to be stable at room temperature for prolonged periods of time (days)).

Annex I, 2.9.4, the classification procedure for pyrophoric liquids need not be applied when experience in manufacture or handling shows that the liquid does not ignite spontaneously on coming into contact with air at normal temperatures (i.e. the liquid is known to be stable at room temperature for prolonged periods of time (days)).

3.10.4.3. Classification criteria

Section 2.9.2.1 of Annex I of CLP specifies the classification criteria:

Annex I: Table 2.9.1	
Criteria for pyrophoric liquids	
Category	Criteria
1	The liquid ignites within 5 min when added to an inert carrier and exposed to air, or it ignites or chars a filter paper on contact with air within 5 min.

3.10.4.4. Testing and evaluation of hazard information

In Section 2.9.2.1 of Annex I of CLP reference to the test-methods are made:

Annex I: 2.9.2.1. *A pyrophoric liquid shall be classified in a single category for this class using test N.3 in part III, sub-section 33.3.1.5¹⁵ of the UN RTDG, Manual of Tests and Criteria according to Table 2.9.1:*


The UN Test N.3 for pyrophoricity is quite simple and sufficiently described in Part III, Section 33.4.5 of the UN-MTC. No special equipment is needed. Essentially the substance or mixture is exposed to air to see if it ignites. For liquids which do not spontaneously ignite when poured, the surface in contact with air is increased using a filter paper. Ignition or charring of the filter paper is regarded as a positive response in the test, i.e. such a liquid is considered to be pyrophoric.

It is important that samples for testing of pyrophoric properties are carefully packed and sealed. Furthermore, the material offered for testing should be freshly prepared, since the reactive properties may diminish due to aging or agglomeration. Whenever experiments are to be done one should be careful – a pyrophoric substance or mixture may well ignite already upon opening the receptacle!

It should be noted that the mechanism of oxidation is, in general, very complex, and that the humidity of air might influence the rate of reaction. Therefore a false negative may result when performing the tests in an extremely dry environment, and this condition must be avoided when performing the tests for classification for pyrophoricity. The filter paper test of UN Test N.3 for pyrophoric liquids should be carried out at 25 ± 2 °C and a relative humidity of 50 ± 5 % (see UN-MTC, Section 33.3.1.5^{4,5}).

3.10.4.5. Decision logic


Classification of pyrophoric liquids is done according to decision logic 2.9.4.1 as included in the GHS.

 NOTE: The person responsible for the classification of pyrophoric liquids should be experienced in this field and be familiar with the criteria for classification.

Decision logic for pyrophoric liquids

Figure 6: Decision logic for pyrophoric liquids (Decision logic 2.9 of GHS)

¹⁵ This note is not part of the legal text: following an update on the UN-MTC, the correct reference is 'sub-section 33.4.5' instead of 'sub-section 33.3.1.5' as indicated in the CLP Regulation.

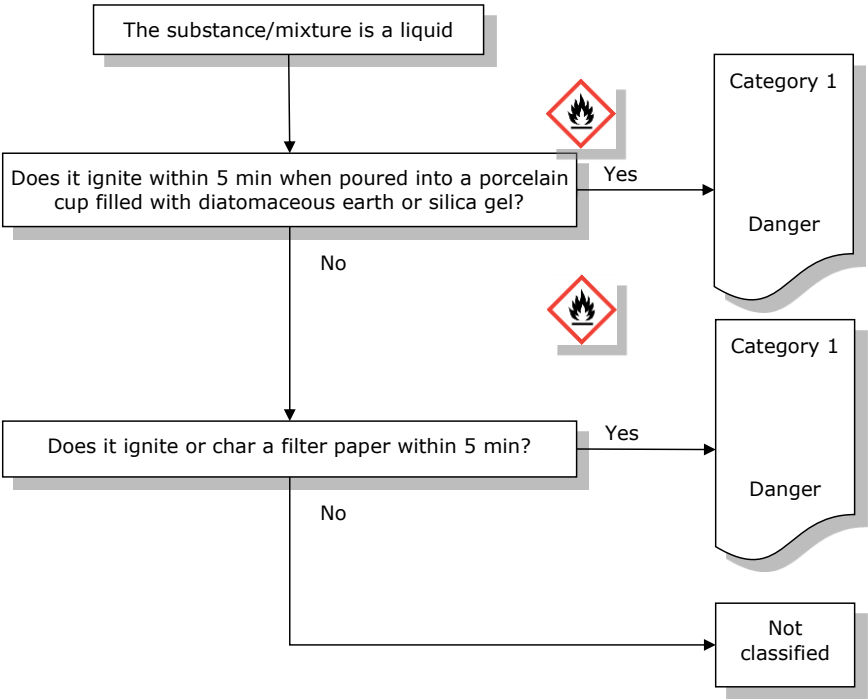

1740

1741 **3.10.5. Hazard communication for pyrophoric liquids**

1742 **3.10.5.1. Pictograms, signal words, hazard statements and precautionary**

1743 **statements**

Annex I: 2.9.3 Table 2.9.2	
Label elements for pyrophoric liquids	
Classification	Category 1
GHS Pictogram	
Signal Word	Danger
Hazard Statement	H250: Catches fire spontaneously if exposed to air
Precautionary Statement Prevention	P210
	P222
	P231 + P232

	<i>P233</i> <i>P280</i>
<i>Precautionary Statement Response</i>	<i>P302 + P334</i> <i>P370 + P378</i>
<i>Precautionary Statement Storage</i>	
<i>Precautionary Statement Disposal</i>	

1744 The wording of the Precautionary Statements is found in CLP Annex IV, Part 2.

1745 **3.10.6. Relation to transport classification**

1746 Division 4.2 within Class 4 of the UN RTDG Model Regulations covers pyrophoric solids, liquids
1747 and self-heating substances and mixtures. UN Test N.3 that is used for classification for
1748 pyrophoricity for liquids according to CLP is also used for classification in the subdivision
1749 pyrophoric substances and mixtures in Division 4.2: Substances liable to spontaneous
1750 combustion according to the UN RTDG Model Regulations. The criteria for Category 1 according
1751 to CLP (which is the only category for pyrophoric liquids) and for packing group I in Division 4.2
1752 according to the modal transport regulations (ADR, RID, ADN and IMDG Code, ICAO TI) are also
1753 exactly the same. Furthermore, all pyrophoric substances and mixtures are assigned to packing
1754 group I within Division 4.2, which is used exclusively for pyrophoric substances and mixtures.

1755 Therefore, any liquid assigned to Division 4.2, packing group I according to the modal transport
1756 regulations (ADR, RID, ADN and IMDG Code, ICAO TI) will be classified in Category 1 of the
1757 hazard class pyrophoric liquids according to CLP. See Annex VII for additional information on
1758 transport classification in relation to CLP classification.

1759 **3.10.7. Example of classification for pyrophoric liquids**

1760 Please note that the substance and mixture names in this chapter are fictitious.

1761 **3.10.7.1. Example of substances and mixtures fulfilling the classification**
1762 **criteria**

1763 **3.10.7.1.1. Example 1**

Name:	Pyrpherdine
Physical state:	Liquid
Pyrophoric properties:	Unknown, therefore the UN Test N.3 of the UN-MTC was applied. However, when opening the receptacle in order to perform the test, Pyrpherdine self-ignited <u>spontaneously</u> .
Classification:	Pyrophoric liquid, Category 1

1764

1765 **3.10.7.1.2. Example 2**

Name:	Qulipyr
-------	---------

Physical state:	Liquid
Pyrophoric properties:	Unknown, therefore the UN Test N.3 of the UN-MTC was applied.
Test result:	When poured according to the test procedure, nothing happened. The procedure was repeated six times, each time giving a negative result (i.e. no ignition). Therefore Qulipyr was supplied to a filter paper in accordance with the test method. In the second trial the filter paper was charred within five minutes.
Classification:	Pyrophoric liquid, Category 1

3.10.7.2. Example of substances and mixtures not fulfilling the classification criteria

3.10.7.2.1. Example 3

Name:	Notpyratal
Physical state:	Liquid
Pyrophoric properties:	Unknown, therefore UN Test N.3 of the UN-MTC was applied.
Test result:	When poured according to the test procedure nothing happened in either of six trials. Therefore Notpyratal was supplied to a filter paper in accordance with the test method, whereupon no ignition or charring occurred in either of three trials.
Classification:	Not a pyrophoric liquid

3.10.8. References

Urban, Peter G. (2007). *Bretherick's Handbook of Reactive Chemical Hazards*, Volumes 1-2 (7th Edition). Elsevier.

3.11. Pyrophoric solids

3.11.1. Introduction

The criteria for 'Pyrophoric solids' are found in Annex I, Section 2.10 of CLP and are identical to those in Chapter 2.10 of GHS⁴.

Pyrophoricity, i.e. the ability to spontaneously ignite in air, is the result of a reaction of a substance or mixture with the oxygen in the air **and it is a very dangerous property**. The reaction is exothermic and has the particularity that it starts spontaneously, i.e. without the aid of a supplied spark, flame, heat or other energy source. Another way of saying this is that the self-ignition temperature for a pyrophoric substance or mixture is lower than room (ambient) temperature.

~~Organo metals and organo metalloids may be suspected of being pyrophores, as well as their derivatives. Also organo phosphines and their derivatives, hydrides and their derivatives, haloacetylene derivatives, and complex acetylides may show pyrophoricity (Urban, 2007). Furthermore, powders or fine particles of metals could be pyrophoric. However, although many~~

~~solid metallic substances, like e.g. aluminium, would be suspected of being pyrophoric when considering their general reactivity, they form a protective oxide coat upon reaction with air. This thin coat of metal oxide prevents the metal from reacting further, and hence such substances may not show pyrophoric behaviour in reality.~~

~~There are also pyrophoric solids that do not belong to the above mentioned groups of chemicals, i.e. the list above is not exhaustive. Since pyrophoric solids ignite spontaneously in air, pyrophoricity is a very dangerous property. In case of doubt it should therefore be thoroughly investigated whether a given solid is pyrophoric. More information on pyrophoric solids can e.g. be found in Bretherick's Handbook of Reactive Chemical Hazards (Urban, 2007).~~

3.11.2. Definitions and general considerations for classification of pyrophoric solids

The definition in CLP for pyrophoric solids is as follows:

Annex I: 2.10.1. Definition

Pyrophoric solid means a solid substance or mixture which, even in small quantities, is liable to ignite within five minutes after coming into contact with air.

Special consideration on particle size

Annex I: 2.10.2.1.

[...]

Note: The test shall be performed on the substance or mixture in its physical form as presented. If, for example, for the purposes of supply or transport, the same chemical is to be presented in a physical form different from that which was tested and which is considered likely to materially alter its performance in a classification test, the substance shall also be tested in the new form.

The finer the particle size of a solid, the greater the area exposed to air will be, and since pyrophoricity is a reaction with the oxygen in air, the particle size will greatly influence the ability to spontaneously ignite. Hence it is very important that pyrophoric properties for solids are investigated on the substance or mixture as it is actually presented (including how it can reasonably be expected to be used, see Article 8(6) of CLP). This is indicated by the Note cited in CLP Annex I, 2.10.2.1.

3.11.3. Relation to other physical hazards

Pyrophoric solids will react spontaneously with air already in small amounts and more or less instantaneously (within minutes). This differentiates them from self-heating substances and mixtures, which also react spontaneously with air but only when in larger amounts and after an extended period of time (hours or days). A solid which is not classified as a pyrophoric solid may thus belong to the hazard class self-heating substances and mixtures, and should be considered for classification in that hazard class, see Chapter 3.12 of this guidance.

Pyrophoricity may be expected for certain reactive metals and some of their compounds (e.g. hydrides and other organo-metal compounds). Many of these substances will also react vigorously with water under the production of flammable gases. Such substances may thus be classified in the hazard class substances and mixtures which in contact with water emit flammable gases in addition to pyrophoric solid classification, see Chapter 3.13 of this guidance. It should be noted in this context that water-reactive substances or mixtures may also to some extent react with the humidity in air, although such a reaction is seldom vigorous. A substance

that spontaneously ignites in air in accordance with the test procedures is to be considered pyrophoric, regardless of the reaction mechanism.

Solids not classified as pyrophoric may still be able to burn rapidly if subjected to enough initiating energy, such as the flame from a gas burner, to start the reaction. Therefore they may be subject to classification in the hazard class flammable solids, see Chapter 3.8 of this guidance, i.e. they may be 'flammable/solids'.

3.11.4. Classification of substances and mixtures as pyrophoric solids

3.11.4.1. Identification of hazard information

Since the tests to determine pyrophoricity are simple and require no special equipment, see Section 3.11.4.4 below, there is in general no reason to go to data sources instead of performing tests. Furthermore, the possibilities of waiving tests are ample both for known pyrophores and for substances and mixtures known not to be pyrophoric, see Section 3.11.4.2 below. If information is taken from literature or other data sources anyway, it is of utmost importance that the correct physical form is considered, see Section 3.1.3. Naturally, all data sources should be carefully evaluated with regard to reliability and scientific validity.

3.11.4.2. Screening procedures and waiving of testing

Organo-metals and organo-metalloids may be suspected of being pyrophores, as well as their derivatives. Also in addition, organo-phosphines and their derivatives, hydrides and their derivatives, haloacetylene derivatives, and complex acetylides may show pyrophoricity (Urban, 2007). Furthermore, powders or fine particles of metals could be pyrophoric. However, although many solid metallic substances, like e.g. aluminium, would be suspected of being pyrophoric when considering their general reactivity, they form a protective oxide-coat upon reaction with air. This thin coat of metal oxide prevents the metal from reacting further, and hence such substances may not show pyrophoric behaviour in reality.

There are also pyrophoric solids that do not belong to the above mentioned groups of chemicals, i.e. the list above is not exhaustive.

Since pyrophoric solids ignite spontaneously in air, pyrophoricity is a very dangerous property. In case of doubt it should therefore be thoroughly investigated whether a given solid is pyrophoric. More information on pyrophoric solids can e.g. be found in Bretherick's Handbook of Reactive Chemical Hazards (Urban, 2007).

In case a solid is known from practical handling to be pyrophoric no testing is necessary. Such solids are classified as pyrophoric solids without testing. This would also be the case if the solid spontaneously ignites upon opening of the receptacle when trying to perform the tests for classification.

According to the additional classification considerations in CLP:

Annex I: 2.10.4.1. The classification procedure for pyrophoric solids need not be applied when experience in manufacture or handling shows that the substance or mixture does not ignite spontaneously on coming into contact with air at normal temperatures (i.e. the substance or mixture is known to be stable at room temperature for prolonged periods of time (days)).

~~Annex I, 2.10.4, the classification procedure for pyrophoric solids need not be applied when experience in manufacture or handling shows that the substance or mixture does not ignite spontaneously on coming into contact with air at normal temperatures (i.e. the substance or mixture is known to be stable at room temperature for prolonged periods of time (days)).~~

1860 3.11.4.3. Classification criteria

1861 Section 2.10.2.1 of Annex I of CLP specifies the classification criteria:

Annex I: Table 2.10.1	
Criteria for pyrophoric solids	
Category	Criteria
1	The solid ignites within 5 minutes of coming into contact with air.

1862

1863 3.11.4.4. Testing and evaluation of hazard information

1864 In Section 2.10.2.1 of Annex I of CLP reference to the test-methods are made:

Annex I: 2.10.2.1. A pyrophoric solid shall be classified in a single category for this class using test N.2 in part III, sub-section 33.3.1.4¹⁶ of the UN RTDG, Manual of Tests and Criteria in accordance with Table 2.10.1:


1865 UN Test N.2 for pyrophoricity is quite simple and sufficiently described in Part III, Section 33.4.2
1866 of the UN-MTC. No special equipment is needed. Essentially the solid is exposed to air to see if
1867 it ignites.

1868 It is important that samples for testing of pyrophoric properties are carefully packed and sealed.
1869 Furthermore, the material offered for testing should be freshly prepared, since the reactive
1870 properties may diminish due to aging or agglomeration. Whenever experiments are to be done
1871 one should be careful – a pyrophoric solid may well ignite already upon opening the receptacle!

1872 It should be noted that the mechanism of oxidation is, in general, very complex, and that the
1873 humidity of air might influence the rate of reaction. It is known that certain metals will not react
1874 in dry air, whereas in the presence of moisture the reaction is almost instantaneous (often even
1875 trace amounts of moisture are sufficient). Therefore a false negative may result when performing
1876 the tests in an extremely dry environment, and this condition must be avoided when performing
1877 the tests for classification for pyrophoricity.

1878 3.11.4.5. Decision logic


1879 Classification of pyrophoric solids is done according to decision logic 2.10.4.1 as included in the
1880 GHS.

 NOTE: The person responsible for the classification of pyrophoric solids should be experienced in this field and be familiar with the criteria for classification.

1881 ~~Decision logic for pyrophoric solids~~

1882 **Figure 7: Decision logic for pyrophoric solids (Decision logic 2.10 of GHS)**

¹⁶ This note is not part of the legal text: following an update on the UN-MTC, the correct reference is ' sub-section 33.4.4' instead of ' sub-section 33.3.1.4' as indicated in the CLP Regulation.

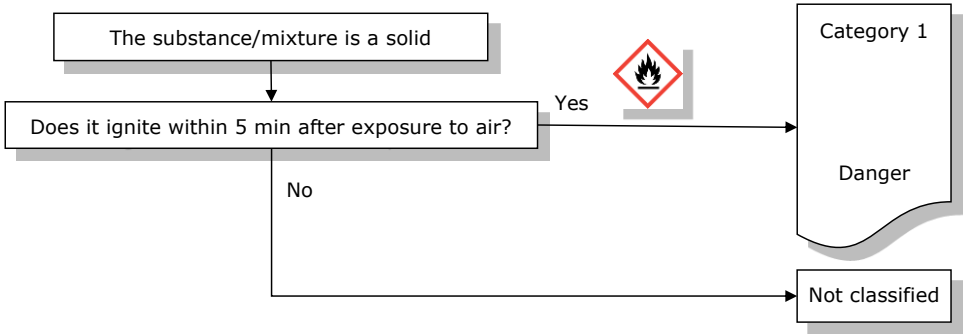

3.11.5. Hazard communication for pyrophoric solids

3.11.5.1. Pictograms, signal words, hazard statements and precautionary statements

Annex I: 2.10.3 Table 2.10.2	
Label elements for pyrophoric solids	
Classification	Category 1
GHS Pictogram	
Signal Word	Danger
Hazard Statement	H250: Catches fire spontaneously if exposed to air
Precautionary Statement Prevention	P210 P222 P231 + P232 P233 P280
Precautionary Statement Response	P302 + P335 + P334 P370 + P378
Precautionary Statement Storage	
Precautionary Statement Disposal	

The wording of the Precautionary Statements is found in CLP Annex IV, Part 2.

1888 **3.11.6. Relation to transport classification**

1889 Division 4.2 within Class 4 of the UN RTDG Model Regulations covers pyrophoric solids, liquids
1890 and self-heating substances and mixtures. The UN Tests N.2 that is used for classification for
1891 pyrophoricity for solids according to CLP is also used for classification in the subdivision
1892 pyrophoric substances and mixtures in Division 4.2: Substances liable to spontaneous
1893 combustion according to the UN RTDG Model Regulations. The criteria for Category 1 according
1894 to CLP (which is the only category for pyrophoric solids) and for packing group I in Division 4.2
1895 according to the modal transport regulations (ADR, RID, ADN and IMDG Code, ICAO TI) are also
1896 exactly the same. Furthermore, all pyrophoric substances and mixtures are assigned to packing
1897 group I within Division 4.2, which is used exclusively for pyrophoric substances and mixtures.

1898 Therefore, any solid ~~substance or mixture~~ assigned to Division 4.2, packing group I according to
1899 the modal transport regulations (ADR, RID, ADN and IMDG Code, ICAO TI) will be classified in
1900 Category 1 of the hazard class pyrophoric solids according to CLP. See Annex VII for additional
1901 information on transport classification in relation to CLP classification.

1902 **3.11.7. Example of classification for pyrophoric solids**

1903 Please note that the substance and mixture names in this chapter are fictitious.

1904 **3.11.7.1. Example of substances and mixtures fulfilling the classification**
1905 **criteria**

1906 **3.11.7.1.1. Example 1**

Name:	Pyroferil
Physical state:	Solid
Pyrophoric properties:	Pyroferil is known to self-ignite upon contact with air at ambient conditions.
Classification:	Pyrophoric solid, Category 1

1907
1908 **3.11.7.1.2. Example 2**

Name:	Zorapyrole
Physical state:	Solid
Pyrophoric properties:	Unknown, therefore the UN Test N.2 of the UN-MTC was applied.
Test result:	When poured from one meter height according to the test procedure, Zorapyrole self-ignited after two minutes already in the first trial.
Classification:	Pyrophoric solid, Category 1

1909

~~supplied and expected to be used.~~

3.12.2. Definitions and general considerations for classification of self-heating substances and mixtures

The definitions in CLP for self-heating substances and mixtures are as follows:

Annex I: 2.11.1.1. *A self-heating substance or mixture is a liquid or solid substance or mixture, other than a pyrophoric liquid or solid, which, by reaction with air and without energy supply, is liable to self-heat; this substance or mixture differs from a pyrophoric liquid or solid in that it will ignite only when in large amounts (kilograms) and after long periods of time (hours or days).*

2.11.1.2. *Self-heating of a substance or a mixture is a process where the gradual reaction of that substance or mixture with oxygen (in the air) generates heat. If the rate of heat production exceeds the rate of heat loss, then the temperature of the substance or mixture will rise which, after an induction time, may lead to self-ignition and combustion.*

3.12.3. Relation to other physical hazards

Pyrophoric solids and liquids should not be considered for classification as self-heating substances and mixtures.

3.12.4. Classification of substances and mixtures as self-heating

3.12.4.1. Identification of hazard information

Self-heating is a very complex phenomenon which is influenced by many parameters (some of them being volume, temperature, particle shape and size, heat conductivity and bulk density). Therefore, self-heating behaviour cannot be predicted from any theoretical model. In some cases, properties might even differ between material from producers of seemingly identical or very similar substances or mixtures. Differences in self-heating behaviour are especially to be anticipated where surface treatment occurs in the production process. Hence, all data sources should be carefully evaluated with regard to reliability and scientific validity.

Self-heating substances and mixtures may include the following:

- many organometallic compounds, especially substances or mixtures containing transition metals;
- many organic substances or mixtures; the tendency to self-heat increases with decreasing particle size;
- many metals, especially catalysts.

Since the surface area of a solid substance or mixture exposed to air increases with decreasing particle size, it follows that particle size and shape will greatly influence the propensity of a substance or mixture to self-heat. Therefore it is very important that self-heating properties for solids, and especially powders, are determined for the substance or mixture in the form it is supplied and expected to be used.

~~It is of utmost importance that in compliance with Articles 5 and 6 of CLP authentic and representative material in the correct form and physical state be used for testing. In many cases, a simple screening test (see Section 2.11.4.2) can be used to determine whether self-heating occurs or not.~~

1966 3.12.4.2. Screening procedures and waiving of testing

Annex I: 2.11.4.2. The classification procedure for self-heating substances or mixtures need not be applied if the results of a screening test can be adequately correlated with the classification test and an appropriate safety margin is applied. Examples of screening tests are:

(a) The Grewer Oven test (VDI guideline 2263, part 1, 1990, Test methods for the Determination of the Safety Characteristics of Dusts) with an onset temperature 80 K above the reference temperature for a volume of 1 l;

(b) The Bulk Powder Screening Test (Gibson, N. Harper, D.J. Rogers, R. Evaluation of the fire and explosion risks in drying powders, Plant Operations Progress, 4 (3), 181-189, 1985) with an onset temperature 60 K above the reference temperature for a volume of 1 l.

1967 EU test methods [s A.15 or A.16](#) as described in Regulation (EC) No 440/2008 check for self-
1968 heating properties. However, the methods used [are](#) generally inappropriate for a sound
1969 assessment [of self-heating](#), and the findings do not lead to a classification. Therefore, special
1970 care must be taken if results from EU test methods [s A.15 or A.16](#) are interpreted towards a CLP
1971 classification for self-heating substances and mixtures. [Even if a temperature rise up to 400 °C](#)
1972 [due to self-heating is not observed, such behaviour cannot be interpreted as conclusive for "no](#)
1973 [classification"](#).

1974 In general, the phenomenon of self-heating applies only to solids. The surface of liquids is not
1975 large enough for reaction with air and the test method is not applicable to liquids. Therefore
1976 liquids are not classified as self-heating. However, if liquids are adsorbed on a large surface (e.g.
1977 on powder particles [or a textile mesh](#)), a self-heating hazard should be considered.

1978 Substances or mixtures with a low melting point (< 160 °C) should not be considered for
1979 classification in this class since the melting process is endothermic and the substance-air surface
1980 is drastically reduced. However, this criterion is only applicable if the substance or mixture is
1981 **completely molten** up to this temperature [\(i.e. test testing basket is empty after the test\)](#).
1982 [Sublimation in the same temperature range is also effective in suppressing self-heating.](#)
1983 [However, if some material remains in the test basket in such a way that the temperature sensor](#)
1984 [as described in UN-MTC section 33.4.6.2 c\) has lost contact, it may be helpful for the](#)
1985 [interpretation of the findings to repeat the experiment with an additional thermocouple in place.](#)

1986 3.12.4.3. Classification criteria

1987 A self-heating substance or mixture must be classified in one of the two categories for this
1988 class if, in a test performed in accordance with UN Test N.4 in Part III, Sub-section 33.3.1.4.6
1989 of the UN-MTC, the result meets the criteria according to following table:

Annex I: Table 2.11.1	
Criteria for self-heating substances and mixtures	
Category	Criteria
1	A positive result is obtained in a test using a 25 mm sample cube at 140 °C
2	(a) a positive result is obtained in a test using a 100 mm sample cube at 140 °C and a negative result is obtained in a test using a 25 mm cube sample at 140 °C and the substance or mixture is to be packed in packages with a volume of more than 3 m³; or
	(b) a positive result is obtained in a test using a 100 mm sample cube at 140 °C and a negative result is obtained in a test using a 25 mm cube sample at

- 140 °C, a positive result is obtained in a test using a 100 mm cube sample at 120 °C and the substance or mixture is to be packed in packages with a volume of more than 450 litres; or
- (c) a positive result is obtained in a test using a 100 mm sample cube at 140 °C and a negative result is obtained in a test using a 25 mm cube sample at 140 °C and a positive result is obtained in a test using a 100 mm cube sample at 100 °C.

Note

The test shall be performed on the substance or mixture in its physical form as presented. If, for example, for the purposes of supply or transport, the same chemical is to be presented in a physical form different from that which was tested and which is considered likely to materially alter its performance in a classification test, the substance shall also be tested in the new form.

2.11.2.3. Substances and mixtures with a temperature of spontaneous combustion higher than 50 °C for a volume of 27 m³ shall not be classified as a self-heating substance or mixture.

2.11.2.4. Substances and mixtures with a spontaneous ignition temperature higher than 50 °C for a volume of 450 litres shall not be assigned to Category 1 of this class.

1990

1991

3.12.4.4. Testing and evaluation of hazard information

1992

A self-heating substance or mixture must be classified in one of the two categories for this class using UN Test N.4 in Part III, Sub-section 33.3.4.6 of the UN-MTC.

1993

1994

3.12.4.4.1. General remarks

1995

If self-heating behaviour cannot be ruled out by a screening test, further testing becomes necessary. UN Test N.4 as described in the latest version of the UN-MTC should be used.

1996

1997

Explosive substances and mixtures should not be tested according to this method. For safety reasons, it is advisable to test for explosive and self-reactive properties and to rule out pyrophoric behaviour before performing this test. The oven should be equipped with an appropriate pressure-release device in case an energetic decomposition is triggered by a temperature rise. For samples containing flammable solvents explosion protection measures have to be taken.

1998

1999

2000

2001

2002

2003

It is of utmost importance that in compliance with Articles 5 and 6 of CLP authentic and representative material in the correct form and physical state be used for testing.

2004

2005

The tests may be performed in any order. It is suggested to start with the 25 mm sample cube at 140 °C. If a positive result is obtained, the substance or mixture must be classified as a self-heating substance or mixture, Category 1, and no further testing is necessary.

2006

2007

2008

~~The test procedure need not be applied if the substance or mixture is completely molten at 160 °C.~~

2009

2010

3.12.4.4.2. Sample preparation

2011

The sample (powder or granular) in its commercial form should be used and should not be milled or ground. It should be filled to the brim of the sample container and the container tapped several times. If the sample settles, more is added. If the sample is heaped it should be levelled to the brim. The sample container is placed in the oven as described in the UN-MTC, section 33.4.6.3.

2012

2013

2014

2015

3.12.4.4.3. Test conduction, cCriteria and evaluation

A positive result is obtained if spontaneous ignition occurs or if the temperature of the sample exceeds the oven temperature by 60 ~~K~~C. The testing time is 24 hours. The time count starts when the temperature in the centre of the sample has reached a value of 2 ~~K~~C below the oven temperature. This is especially important when the sample contains solvents which evaporate under the test conditions or when larger test volumes are used for extrapolation purposes (see below).


Before starting UN Test N.4, the decomposition behaviour of the sample should be known. In general, it is sufficient to perform a screening ~~with~~ Differential Scanning Calorimetry measurement; see UN-MTC section 20.3.3.3. Special care with respect to the interpretation of the test data is necessary when exothermic decomposition may occur at the test temperatures. In such cases, a test under an inert atmosphere (i.e. nitrogen) should be run to determine the temperature rise due to decomposition. Careful flushing with the chosen inert gas is essential in such cases since otherwise much air may be retained between the crystals of the sample in the container. If endothermic decomposition occurs during testing (for example, release of flammable or toxic gases) the criterion of a 60 °C temperature rise according to UN-MTC section 33.4.6.3 may not be fulfilled because temperature increase is hindered by the endotherm. However, if such dangerous reaction may be triggered by self-heating the criterion for classification should be considered as fulfilled. An additional thermogravimetric measurement is advisable for assessment under these circumstances.

3.12.4.5. Decision logic

The following decision logic for self-heating substances and mixtures is applicable according to CLP.



NOTE: The person responsible for the classification of self-heating substances and mixtures should be experienced in this field and be familiar with the criteria for classification.

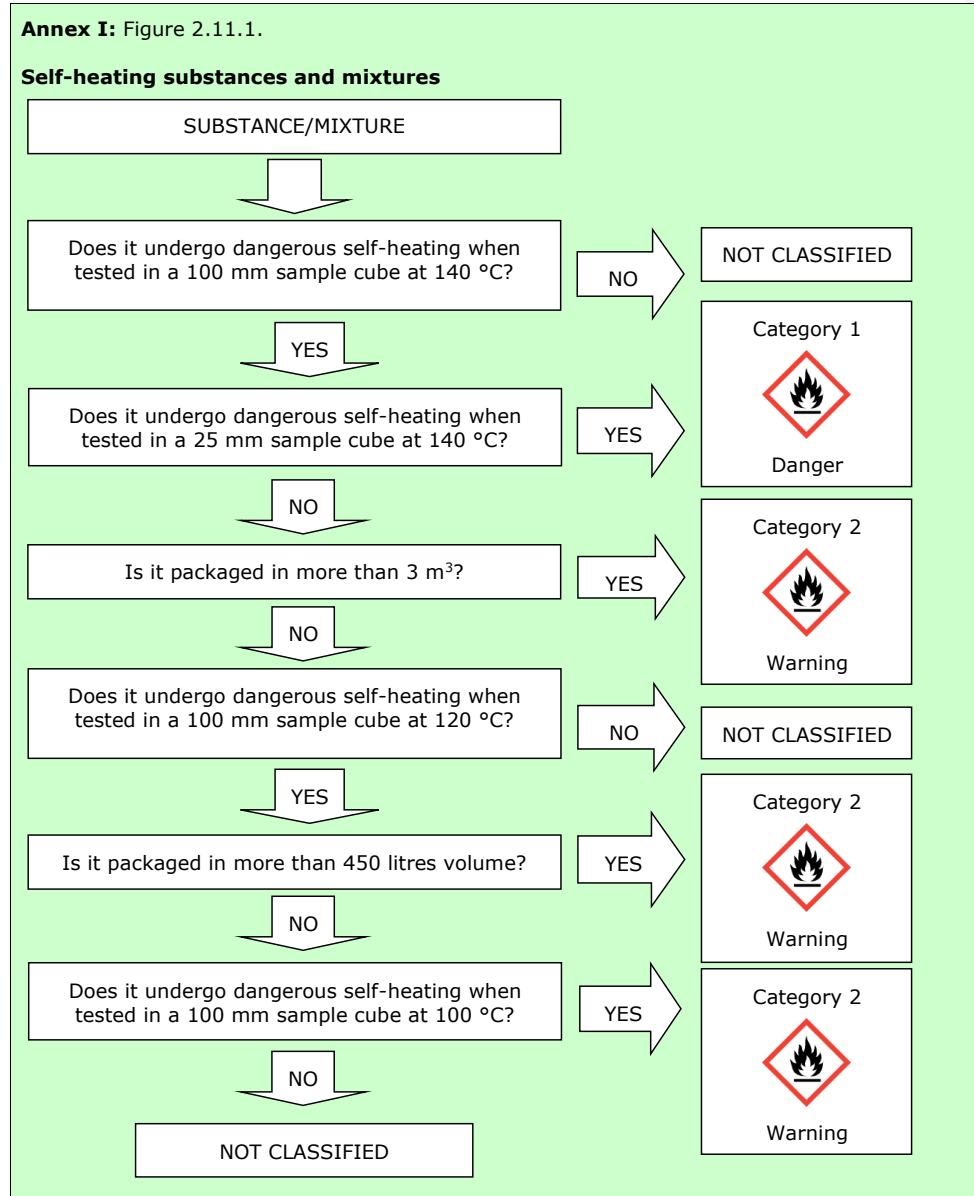

2039

2040 **3.12.4.6. Exemption**

2041 The following exemptions apply (see Section [2.11.4.32.11.2.3](#) and [2.11.2.4](#)):

- 2042
- 2043
- 2044
- 2045
- 2046
- Substances and mixtures with a temperature of spontaneous combustion higher than 50 °C for a volume of 27 m³ ~~must~~ shall not be classified as a self-heating substance or mixture.
 - Substances and mixtures with a spontaneous ignition temperature higher than 50 °C for a volume of 450 litres must not be assigned to Category 1 of this class.

2047

2048

2049

2050

2051

2052

2053

However, the UN-MTC does not provide any guidance on how these values should be determined. ~~The UN test regime is based on the assumption of a cubic sample shape. For the extrapolation to larger volumes, an improved model has to be used.~~ According to Grewer (Grewer, 1994), plotting the logarithm of the volume to surface ratio (log (V/A)) versus the reciprocal temperature gives good results without knowledge of the Frank-Kamenetzkii (Frank-Kamenetzkii, 1969) shape factor. ~~This method had first been suggested by Leuschke (Leuschke, 1976 and 1981) as an empirical alternative to the Frank-Kamenetskii approach.~~


2054

2055

The critical temperature for a volume of 450 l or 27 m³ can be found by extrapolation of the critical temperature in a log (V/A) vs. 1/T plot (see Figure 8):

2056

Figure 8: Extrapolation towards large volumes

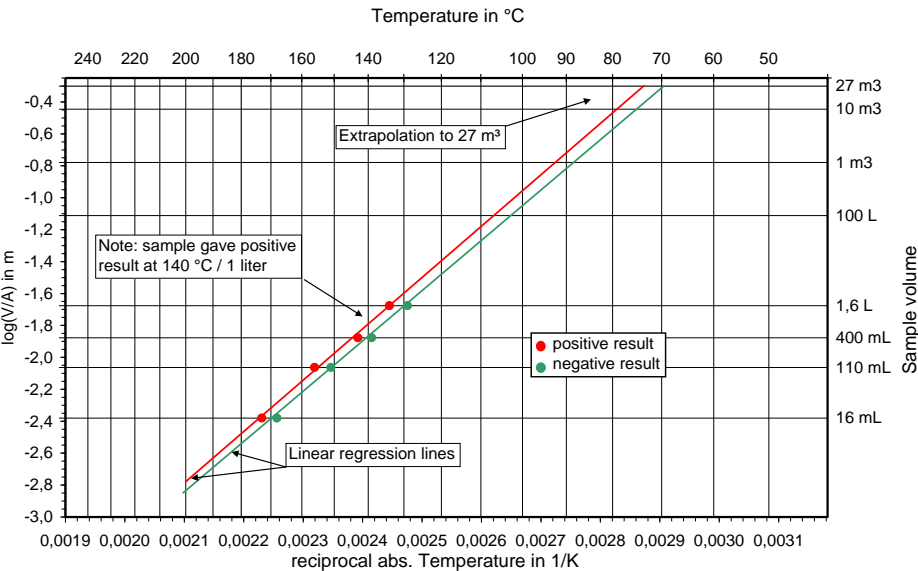

A conservative approach is required for the evaluation. The uncertainty of measurement must be taken into account. The extrapolation must be based on a linear regression of the negative and positive borderline data sets in the log (V/A) vs. 1/T diagram. ~~The maximum permissible difference between a positive and a negative result should be 5 K.~~ An exemption may be claimed if the more conservative endpoint for the particular volume is well beyond 50 °C (i.e. 55 °C or higher).

It should be noted that the slope of the line in the 1/T vs. volume diagram depends on the individual activation energy of the substance or mixture, and therefore it may vary within certain limits. It must be born in mind that this test regime has been developed to facilitate classification and that it may not suffice to solve safety issues in storage.

A significant increase in the accuracy of the extrapolation can be achieved by conducting tests on a semi-industrial scale. Experiments up to a volume of 1 m³ are presented in Martin Schmidt et al., 2022. For all materials investigated so far, the critical temperatures of the 1 m³ sample were higher than predicted by the extrapolation of laboratory tests according to Leuschke.



In Martin Schmidt et al., 2022, a further screening method based on the direct measurement of the heat flows at process temperatures (microcalorimetric low-temperature measurements) is also introduced.

3.12.5. Hazard communication for self-heating substances or mixtures

3.12.5.1. Pictograms, signal words, hazard statements and precautionary statements

Annex I: Table 2.11.2

Label elements for self-heating substances and mixtures

Classification	Category 1	Category 2
GHS Pictograms		
Signal Word	Danger	Warning
Hazard Statement	H251: Self-heating; may catch fire	H252: Self-heating in large quantities; may catch fire
Precautionary Statement Prevention	P235 P280	P235 P280
Precautionary Statement Response		
Precautionary Statement Storage	P407 P413 P420	P407 P413 P420
Precautionary Statement Disposal		

The wording of the Precautionary Statements is found in CLP Annex IV, Part 2.


Division 4.2 – substances and mixtures liable to spontaneous combustion – within Class 4 of the UN RTDG Model Regulations comprises the following entries:

- Whereas pyrophoric substances and mixtures in the modal transport regulations (ADR, RID, ADN and IMDG Code, ICAO TI) are assigned to packing group I, self-heating substances and mixtures are assigned to packing groups II and III. In cases where a substance or mixture is classified in Division 4.2, packing group II or III, the translation into the CLP system is straightforward.

3.12.7. Example of classification for self-heating substances or mixtures



- many organometallic compounds, especially substances or mixtures containing transition metals;
- many organic substances or mixtures; the tendency to self heat increases with decreasing particle size;
- many metals, especially catalysts.

Figure 9: Results of UN N.4 Test according to the UN-MTC

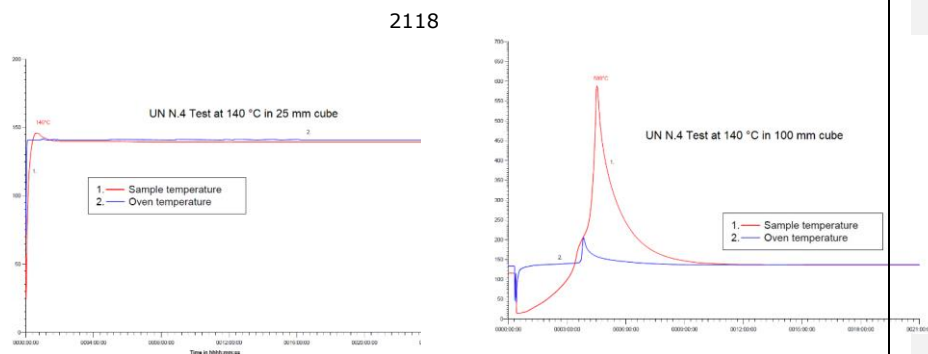

2119


2120

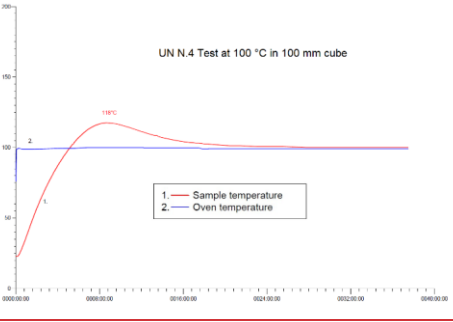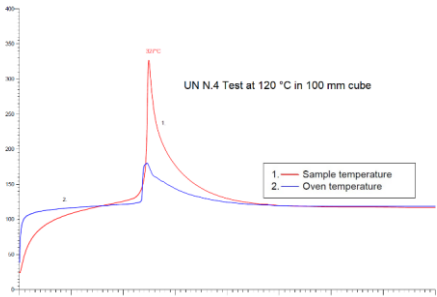

The temperature rises in the 25 mm cube from 140 °C to 146 °C (first diagram) and in the 100 mm cube from 100 °C to 118 °C (last diagram). At 120 °C and 140 °C in the 100 cube, the temperature increase is far beyond 60 °C.

For a substance or mixture packaged in a volume of 1000 litres, the classification comes to the following result.

Figure 10: Results of UN N.4 Test according to the UN-MTC

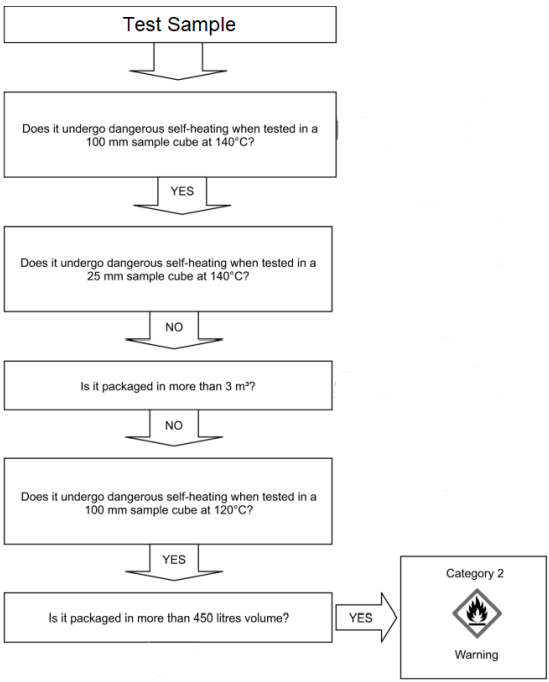

3.12.7.2. Example of substances and mixtures not fulfilling the classification criteria

In general, liquids show no self-heating behaviour unless adsorbed on a large surface.

Scientific background


A basic model for the thermal explosion of solids was first developed by Frank-Kamenetzskii (Frank-Kamenetzskii, 1969). It is based on the assumption that only the heat loss by thermal conduction is relevant for the phenomenon. In this case, the critical criterion for a thermal runaway reaction can be described as a linear relationship between the reciprocal absolute temperature and the logarithm of volume.

The classification scheme of the UN for self-heating substances and mixtures is based on charcoal as a reference system. The critical temperature for a 1 litre cube of charcoal is 140 °C and for a cube of 27 m³ 50 °C. When a parallel line is drawn in the 1/T vs. logarithm of volume diagram

from the reference points 1 litre / 120 °C and 1 litre / 100 °C, the corresponding volumes for a critical temperature of 50 °C are found to be 3 m³ and 450 l, respectively (see). The black dotted line in separates Category 1 from Category 2. For examples of results ~~the obtained in~~ Test N.24 see Section 33.3.1-4.6.5 of UN-MTC.

However, the slope of the line in the 1/T vs. volume diagram depends on the individual activation energy of the substance or mixture, and therefore it may vary within certain limits. It must be born in mind that this test regime has been developed to facilitate classification and that it may not suffice to solve safety issues in storage.

Figure 11: Volume dependency of the critical temperature for charcoal

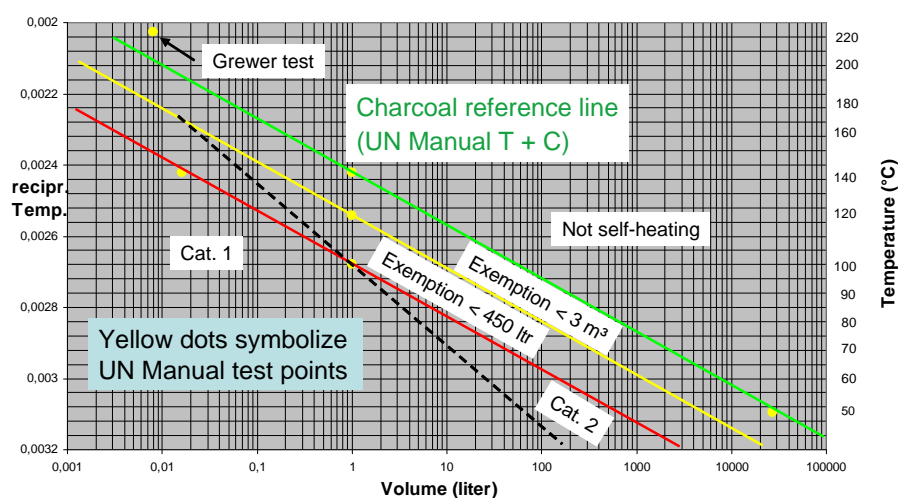

3.12.8. References

- Grewer, T. (1994). *Thermal hazards of chemical reactions*, Elsevier.
- Frank-Kamenetskii, D.A. (1969). *Diffusion and heat transfer in chemical kinetics*, 2nd edition, Plenum Press, New York, London.
- [Leuschke G. \(1976\). Self-Ignition of Powdered Materials, VFBD 5th International Fire Protection Seminar.](#)
- [Leuschke, G. \(1981\). Experimental investigations on self-ignition of dust deposits in hot environments, Runaway Reactions, Unstable Products and Combustible Powders, IChemE Symposium Series 68.](#)
- [Martin Schmidt, Marcus Gödde, Steffen Salg, René Erdt \(2022\). Self-ignition Behaviour of Bulk Materials: How Reliable is the Extrapolation of Laboratory Tests?, Chemical Engineering Transactions, Vol. 90, 289-294, DOI: 10.3303/CET2290049.](#)

2162 **3.13. Substances or mixtures which, in contact with water, emits**
2163 **flammable gases**

2164 **3.13.1. Introduction**

2165 The criteria for 'Substances and mixtures which, in contact with water, emit flammable gases'
2166 are found in Annex I, Section 2.12 of CLP and are identical to those in Chapter 2.12 of GHS⁴. |

2167 Depending on the chemical structure and/or the physical state (e.g. particle size) substances or
2168 mixtures may be able to react with water (even damp / air humidity) under normal ambient
2169 temperature conditions. Sometimes this reaction can be violent and/or with significant
2170 generation of heat. Especially if gases are evolved this reaction may become very dangerous
2171 during use. In addition, it is important to know whether a substance or mixture emits flammable
2172 gases after contact with water because special precautions are necessary especially with regard
2173 to explosion protection.

2174 Examples are demonstrated in the following table.

2175 **Table 2: Examples of hazards, depending on the property of the emitted gas, when substances**
2176 **and mixtures are in contact with water**

Type of emitted gas	Example of the hazard	CLP Reference
Gas (in general)	<ul style="list-style-type: none">• Heating up of the substance• Splashing of the substance and thus e.g. contact with skin etc. or additional risk during fire fighting• Pressure rise and bursting of e.g. the packaging, tank	Annex II, 1.1.3: Supplemental hazard information: EUH014*
Flammable gas	<ul style="list-style-type: none">• Ignition• Flash of fire	Annex I, 2.12: H260/H261
Toxic gas	<ul style="list-style-type: none">• Damage to health: intoxication (acute)	Annex II, 1.2.1: Supplemental hazard information: EUH029

2177 * For supplemental hazard information: see Section [Error! Reference source not found.](#)

2178 **3.13.2. Definitions and general considerations for classification of substances**
2179 **or mixtures which, in contact with water, emits flammable gases**

2180 The following definition is given in CLP for substances and mixtures which, in contact with water,
2181 emit flammable gases (CLP Annex I, 2.12).

Annex I: 2.12.1. *Substances or mixtures which, in contact with water, emit flammable gases means solid or liquid substances or mixtures which, by interaction with water, are liable to become spontaneously flammable or to give off flammable gases in dangerous quantities.*

3.13.3. Relation to other physical hazards

If the chemical identity of the emitted gas is unknown, the gas must be tested for flammability (unless it ignites spontaneously). ~~Other than under DSD/DPD, p~~Pyrophoric liquids and pyrophoric solids have to be considered for classification in this hazard class as well and data about pyrophoric properties are needed prior to testing for this hazard class.

3.13.4. Classification of substances and mixtures which, in contact with water, emits flammable gases

3.13.4.1. Identification of hazard information

For the classification of substances and mixtures which, in contact with water, emit flammable gases the following data are needed, if applicable:

- chemical structure;
- water solubility;
- chemical identity and flammability of the emitted gas;
- pyrophoric properties of the tested substance or mixture;
- particle size in case of solids;
- friability in case of solids;
- hazard properties in general;
- information concerning the experience in production or handling.

See also *IR & CSA, Chapter R.7a: Endpoint specific guidance*, Section R.7.1.7 (Water solubility), R.7.1.14 (Granulometry).

Information about the chemical structure is used to check whether the substance or mixture contains metals and/or metalloids.

Many different types of chemicals may belong to the hazard class of substances and mixtures which, in contact with water, emit flammable gases, for example, alkali metals, alkyl aluminium derivatives, alkyl metals, metal hydrides, metal phosphides, certain metal powders. A comprehensive list can be found in *Bretherick's Handbook of Reactive Chemical Hazards* (Urban, 2007).

The water solubility is used to decide whether the substance or mixture is soluble in water to form a stable mixture. This may also be decided based on information concerning experience in handling or use, e.g. the substance or mixture is manufactured with water or washed with water (see Section [Error! Reference source not found.](#)).

The chemical identity of the emitted gas is used to decide whether the evolved gas is flammable or not. If the chemical identity of the emitted gas is unknown, the gas must be tested for flammability (see Section [2.2](#)).

In case of pyrophoric substances and mixtures the UN Test N.5 of the UN-MTC, Part III, Section 33.5.4.1.3.1 must be executed under nitrogen atmosphere. Therefore, data about pyrophoric properties are needed prior to testing.

2219 The melting point, boiling point and information about viscosity are necessary to identify the
2220 physical state of the substance or mixture. See also *IR & CSA, Chapter R.7a: Endpoint specific*
2221 *guidance*, Section R.7.1.2 (Melting point/freezing point), R.7.1.3 (Boiling point), R.7.1.18
2222 (Viscosity).

2223 Even though the UN Test N.5 can be applied to both, solids and liquids, these data are necessary
2224 to decide whether information concerning the friability (for solids) in accordance with the test
2225 method is necessary.

2226 The particle size and the friability of a solid substance or mixture are crucial parameters for the
2227 classification of substances and mixtures which, in contact with water, emit flammable gases.
2228 These parameters have a significant effect on the test result. Thus specific requirements
2229 regarding the particle size and the friability are prescribed in the UN Test N.5. For further details
2230 regarding the test procedure see Section [Error! Reference source not found.](#).

2231 The references in Section [3.13.8](#) provide good quality data on physical hazards.

2232 3.13.4.2. Screening procedures and waiving of testing

2233 For the majority of substances and mixtures, flammability as a result of contact with water is
2234 not a typical property and testing can be waived based on a consideration of the structure and
2235 experiences in handling and use.

Annex I: 2.12.4.1. *The classification procedure for this class need not be applied if:*

- a) the chemical structure of the substance or mixture does not contain metals or metalloids; or*
- b) experience in handling and use shows that the substance or mixture does not react with water, e.g. the substance is manufactured with water or washed with water; or*
- c) the substance or mixture is known to be soluble in water to form a stable mixture.*

2236

2237 3.13.4.3. Classification criteria

Annex I: Table 2.12.1

Criteria for substances or mixtures which in contact with water emit flammable gas

Category	Criteria
1	Any substance or mixture which reacts vigorously with water at ambient temperatures and demonstrates generally a tendency for the gas produced to ignite spontaneously, or which reacts readily with water at ambient temperatures such that the rate of evolution of flammable gas is equal to or greater than 10 litres per kilogram of substance over any one minute.
2	Any substance or mixture which reacts readily with water at ambient temperatures such that the maximum rate of evolution of flammable gas is equal to or greater than 20 litres per kilogram of substance per hour, and which does not meet the criteria for Category 1.
3	Any substance or mixture which reacts slowly with water at ambient temperatures such that the maximum rate of evolution of flammable gas is equal to or greater than 1 litre per kilogram of substance per hour, and which does not meet the

criteria for Categories 1 and 2.

Note:

The test shall be performed on the substance or mixture in its physical form as presented. If for example, for the purposes of supply or transport, the same chemical is to be presented in a physical form different from that which was tested and which is considered likely to materially alter its performance in a classification test, the substance must also be tested in the new form.

2.12.2.2. A substance or mixture shall be classified as a substance or mixture which in contact with water emits flammable gases if spontaneous ignition takes place in any step of the test procedure.

3.13.4.4. Testing and evaluation of hazard information

3.13.4.4.1. Testing procedure

Care must be taken during testing as the emitted gas might be toxic or corrosive.

The testing procedure for substances and mixtures which in contact with water emit flammable gases is sensitive to a number of influencing factors and therefore must be carried out by experienced personnel. Some of these factors are described in the following:

1. Apparatus / measuring technique

In UN Test N.5 no special laboratory apparatus / measuring technique to determine the rate of gas evolution is required and no reference material is prescribed. As demonstrated in the past by a round robin test (Kunath, K. *et al.* 2011), the gas evolution rate measured by different apparatuses may vary widely. Therefore in order to avoid measuring and classification errors adequate quality control measures are necessary to validate the results and should be noted in the test report.

2. Particle size and/or friability

The particle size of a solid has a significant effect on the test result. Therefore, if for solids the percentage of powder with a particle size of less than 500 µm constitutes more than 1 % of the total mass, or if the substance or mixture is friable, then the complete sample must be ground to a powder before testing to account for a possible reduction in particle size during handling and transport.

In certain cases, grinding may not be applicable and/or the sample cannot be ground completely to a particle size of less than 500 µm (e.g. metal granules).

Information on these pre-treatments and the respective procedures, the particle size and the friability has to be provided in the test report.

3. Atmospheric parameters

Variations of the atmospheric parameters (mainly air pressure and temperature) during the test have a considerable influence on the test result. Therefore the substance or mixture must be tested at 20 °C, i.e. make sure that the test apparatus is acclimatised to 20 °C.

On the other hand it is difficult to regulate and stabilise the air pressure during the testing. To characterise this influencing factor and to avoid false positive results, an additional 'blank test'

2268 is highly recommended. The results of the blank test should be noted in the test report.

2269 4. Test with demineralised (distilled) water

2270 The UN Test N.5 is performed with demineralised (distilled) water. In practice, contact with
2271 water can be to water in the liquid state (fresh water, sea water) or humid air, respectively.
2272 Note that the reactivity and thus the gas evolution rate observed in practice may differ from
2273 the gas evolution rate value measured using demineralised water. This should be taken into
2274 account when handling substances and mixtures which in contact with water emit flammable
2275 gases.

2276 5. Stirring procedures during the test

2277 Stirring of the sample or water mixture during the test may have a considerable effect on the
2278 test result (e.g. significant increase or decrease of the gas evolution rate). Therefore, the sample
2279 or water mixture should not be stirred continuously during the test, e.g. by an automatic
2280 magnetic stirrer, even if the test sample has hydrophobic properties and moistening of the
2281 sample becomes impossible (see Kunath K. et al., 2011).

2282 6. Spontaneous ignition

2283 Spontaneous ignition of the evolved gas without contact with an additional ignition source, i.e.
2284 without the flame of the gas burner results in classification as Category 1. This does not
2285 necessarily mean that the evolved gas is pyrophoric but often the heat of reaction is sufficient
2286 to ignite the evolved gas (e.g. the hydrogen evolved when sodium reacts with water).

2287 **3.13.4.4.2. Evaluation of hazard information**

2288 In order to accurately interpret the test results the evaluating person must have sufficient
2289 experience in the application of the test methods and in the disturbing / influencing factors as
2290 described above.

2291 The evaluation of data comprises two steps:


- 2292 • evaluation of all available data; and
- 2293 • identification of the study or studies giving rise to the highest concern (key studies).

2294 The criteria for assignment to Category 2 or 3 are gas evolution rates of 20 and 1 litre per
2295 kilogram of substance or mixture per hour, respectively, but for Category 1 the relevant criterion
2296 is 10 litres per kilogram of substance or mixture over any one minute period (if the gas does not
2297 ignite spontaneously). This has to be considered while testing and for correct evaluation of the
2298 test results.

2299 The assignment to the respective hazard class/category will further determine the technical
2300 means to be taken to avoid dangerous events which, in combination with other safety
2301 characteristics such as i) explosion limits, ii) flash points (applicable only for liquids) or iii) self-
2302 ignition temperature, can lead to clear restrictions in the conditions of use.


2303 **3.13.4.5. Decision logic**

2304 Classification of substances and mixtures which, in contact with water, emit flammable gases is
2305 done according to decision logic 2.12.4.1 as included in the GHS.

 NOTE: The person responsible for the classification of substances and mixtures which, in contact with water, emit flammable gases should be experienced in this field and be familiar

with the criteria for classification.

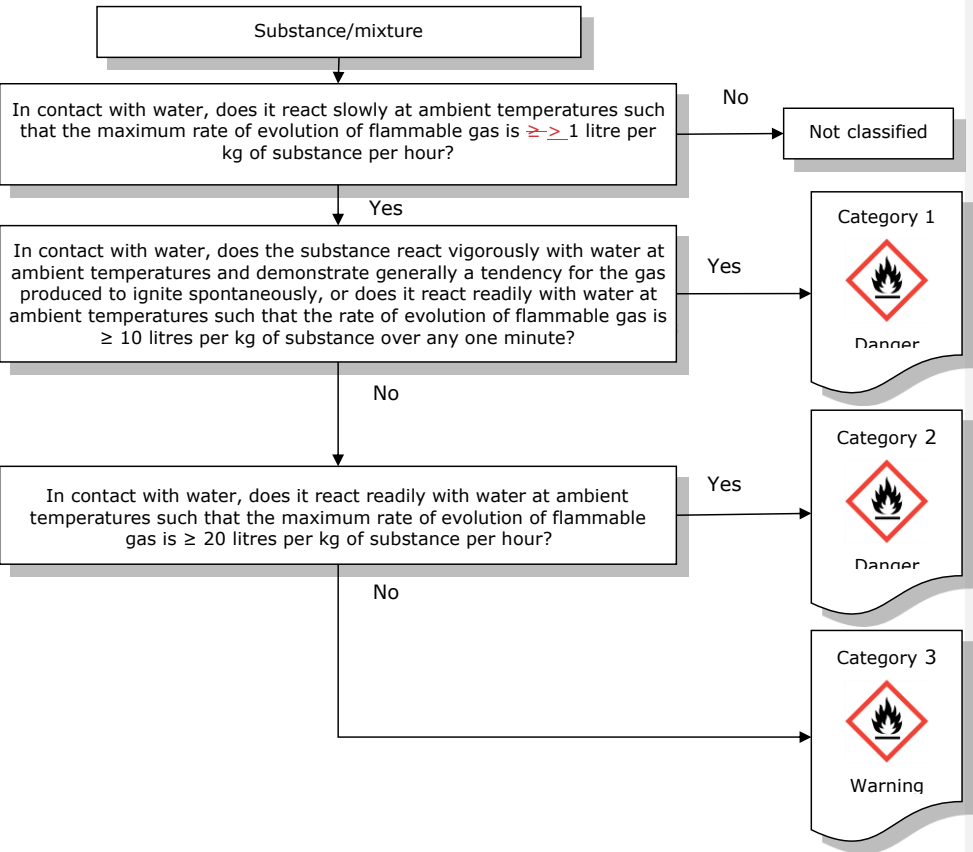


Figure 12: Decision logic for substances and mixtures which, in contact with water, emit flammable gases (Decision logic 2.12 of GHS)



3.13.5. Hazard communication for substances or mixtures which, in contact with water, emits flammable gases

3.13.5.1. Pictograms, signal words, hazard statements and precautionary statements

Annex I: Table 2.12.2			
Label elements for substances or mixtures which in contact with water emit flammable gases			
Classification	Category 1	Category 2	Category 3

GHS Pictograms			
Signal Word	<i>Danger</i>	<i>Danger</i>	<i>Warning</i>
Hazard Statement	<i>H260: In contact with water releases flammable gases which may ignite spontaneously</i>	<i>H261: In contact with water releases flammable gases</i>	<i>H261: In contact with water releases flammable gases</i>
Precautionary Statement Prevention	<i>P223 P231 + P232 P280</i>	<i>P223 P231 + P232 P280</i>	<i>P231 + P232 P280</i>
Precautionary Statement Response	<i>P302 + P335 + P334 P370 + P378</i>	<i>P302 + P335 + P334 P370 + P378</i>	<i>P370 + P378</i>
Precautionary Statement Storage	<i>P402 + P404</i>	<i>P402 + P404</i>	<i>P402 + P404</i>
Precautionary Statement Disposal	<i>P501</i>	<i>P501</i>	<i>P501</i>

2313 The wording of the Precautionary Statements is found in CLP Annex IV, Part 2.

2314 3.13.5.2. Additional labelling provisions

2315 Annex II of CLP provides the following additional labelling provisions for water-reactive
 2316 substances and mixtures. These statements must be assigned in accordance with CLP, Article
 2317 25 (1), to substances and mixtures classified for physical, health or environmental hazards.
 2318 There are no criteria or test methods provided for these EUH statements.

2319

<p>Annex II: 1.1.31. EUH014 – 'Reacts violently with water'</p> <p><i>For substances and mixtures which react violently with water, such as acetyl chloride, alkali metals, titanium tetrachloride.</i></p>
<p>Annex II: 1.2.1. EUH029 – 'Contact with water liberates toxic gas'</p> <p><i>For substances and mixtures which in contact with water or damp air, evolve gases classified for acute toxicity in category 1, 2 or 3 in potentially dangerous amounts, such as aluminium phosphide, phosphorus pentasulphide.</i></p>

2320 3.13.6. Relation to transport classification

2321 Division 4.3 within Class 4 of the UN RTDG Model Regulations covers substances and mixtures
2322 which in contact with water emit flammable gasses. Substances and mixtures which are classified
2323 and/or labelled in Division 4.3 in the modal transport regulations (ADR, RID, ADN and IMDG
2324 Code, ICAO TI) are classified as substances and mixtures which, in contact with water, emit
2325 flammable gases under CLP. See Annex VII for additional information on transport classification
2326 in relation to CLP classification.

2327 3.13.7. Example of classification for substances or mixtures which, in contact
2328 with water, emits flammable gases

2329 ~~Many different types of chemicals may belong to the hazard class of substances and mixtures~~
2330 ~~which, in contact with water, emit flammable gases, for example, alkali metals, alkyl aluminium~~
2331 ~~derivatives, alkyl metals, metal hydrides, metal phosphides, certain metal powders. A~~
2332 ~~comprehensive list can be found in Bretherick's Handbook of Reactive Chemical Hazards (Urban,~~
2333 ~~2007).~~

2334 3.13.7.1. Example of substances and mixtures fulfilling the classification
2335 criteria

2336 3.13.7.1.1. Example 1

PYROPHORIC SUBSTANCE FULFILLING THE CRITERIA FOR CLP CLASSIFICATION	
Substance:	Magnesium alkyls (Index No. 012-003-00-4)
Chemical structure:	R ₂ Mg
Flammable gas:	Hydrogen
Gas evolution rate:	N ot applicable
Spontaneous ignition:	N ot possible due to the nitrogen atmosphere during the UN Test N.5
DSD classification:	F; R14-17
Transport classification:	-
Reference:	Former Annex I to DSD and Annex VI to CLP
⇒ CLP Classification:	Water-react. 1; H260 Pyr. Sol. 1; H250
Supplemental Hazard Information:	EUH014

2337
2338 3.13.7.2. Example of substances and mixtures not fulfilling the classification
2339 criteria

2340 3.13.7.2.1. Example 2

MANGANESE ETHYLENE BIS (DITHIOCARBAMATE) COMPLEX WITH ZINC SALT 88 % (MANCOZEB)
--

Gas evolution rate:	0 litres per kilogram of substance per hour.
Spontaneous ignition:	N ot applicable
Transport classification:	N ot Class 4.3
Reference:	UN Test N.5, UN-MTC Table 33.4.1.4.5 section 33.5.4.5
⇒ CLP Classification:	Not classified as substance which, in contact with water, emit flammable gases

3.13.8. References

~~William M. Haynes, William M. et al. (2012) CRC Handbook of Chemistry and Physics 93rd Edition. CRC Press, Taylor and Francis, Boca Raton, FL~~

~~GESTIS-database on hazardous substances:
<http://www.dguv.de/bgia/en/gestis/stoffdb/index.jsp>~~

~~Janès, A., Marlair, G., Carson, D., Chaineaux, J. (2012) Towards the improvement of UN N.5 test method for the characterization of substances which in contact with water emit flammable gases, Journal of Loss Prevention in the Process Industries, Volume 25, Issue 3, 524-534, <https://www.sciencedirect.com/science/article/pii/S0950423011002166>~~

~~Kunath, K., Lüth, P., Uhlig, S. (2011). Interlaboratory test on the method UN Test N.5 / EC A.12 "Substances which, in contact with water, emit flammable gases" 2007. Short report. BAM Bundesanstalt für Materialforschung und -prüfung. Berlin. ISBN 978-3-9814634-1-5. http://www.bam.de/de/service/publikationen/publikationen_medien/short_report_rv_un_n_5.pdf~~

Field Code Changed

~~O'Neil, Maryadele J. et al. (2016, 2012) The Merck Index - An Encyclopaedia of Chemicals, Drugs, and Biologicals (14th Edition - Version 14.9). Merck Sharp & Dohme Corp., a subsidiary of Merck & Co., Inc.~~

~~Urban, Peter G. (2007). Bretherick's Handbook of Reactive Chemical Hazards, Volumes 1-2 (7th Edition). Elsevier.~~

~~Kunath, K., Lüth, P., Uhlig, S. (2011). Interlaboratory test on the method UN Test N.5 / EC A.12 "Substances which, in contact with water, emit flammable gases" 2007. Short report. BAM Bundesanstalt für Materialforschung und -prüfung. Berlin. ISBN 978-3-9814634-1-5. http://www.bam.de/de/service/publikationen/publikationen_medien/short_report_rv_un_n_5.pdf~~

Field Code Changed

3.14. Oxidising liquids

3.14.1. Introduction

The criteria for 'Oxidising liquids' are found in Annex I, Section 2.13 of CLP and are identical to those in Chapter 2.13 of GHS⁴.

The hazard class oxidising liquids comprises liquid substances and mixtures whose hazard is characterised by the fact that, in contact with other materials, they are able to cause or contribute to the combustion of those materials. The other materials do not necessarily have to belong to a certain hazard class in order to be able to be affected by the presence of oxidising substances or mixtures. This is for example the case when a solid material (e.g. wood) is soaked

with an oxidising liquid.

Certain combinations of combustible materials and oxidising substances or mixtures may even result in spontaneous combustion, thermal instability or form an explosive mixture, ~~this means that they may have explosive properties or may be regarded as self-reactive substances or mixtures.~~

Although widely known as oxidising materials, their hazard and behaviour might be better understood by considering them to be fire enhancing substances or mixtures.

~~The hazards communication of oxidising liquids intends to communicate the property that it may cause fire or explosion or that it may intensify fire.~~

Apart from the combustion hazard, the production of toxic and/or irritating fumes may cause an additional hazard. For example, when nitrates are involved in a fire, nitrous fumes may be formed.

The testing procedure and criteria for oxidising substances or mixtures ~~do not work properly~~ are not appropriate for ammonium nitrate compounds or solutions, ammonium nitrate based fertilizers and ammonium nitrate emulsions, suspensions or gels due to their complex hazard profiles. Therefore for classification and labelling of substances or mixtures containing ammonium nitrate, known experience should be used and expert judgement should be sought. For the classification procedures for ammonium nitrate emulsions, suspensions or gels – intermediate for blasting explosives, see Chapter Error! Reference source not found. of this guidance.

Annex I: 2.13.4.3

In the event of divergence between test results and known experience in the handling and use of substances or mixtures which shows them to be oxidising, judgments based on known experience shall take precedence over test results.

3.14.2. Definitions and general considerations for classification of oxidising liquids

The CLP text comprises the following definition for oxidising liquids.

Annex I: 2.13.1. Definition

Oxidising liquid means a liquid substance or mixture which, while in itself not necessarily combustible, may, generally by yielding oxygen, cause, or contribute to, the combustion of other material.

3.14.3. Relation to other physical hazards

Oxidising liquids that are mixed with combustible materials or reducing agents may have explosive properties and should be considered for classification in the hazard class Explosives (including the applicable screening procedures), see Chapter Error! Reference source not found. of this guidance ~~or as self-reactive substances and mixtures, see CLP, Annex I, 2.8.2.1 (b) and Chapter 2.8 of this guidance.~~

In rare cases, mixtures with oxidising liquids may exhibit self-reactive behaviour, see Chapter Error! Reference source not found. of this guidance. Expert judgement should be sought in

2408 case of doubt.

2409 The classification procedure and criteria for oxidising substances or mixtures is not applicable
2410 for organic peroxides. ~~Under DSD organic peroxides were considered to be oxidising substances~~
2411 ~~or mixtures because of the presence of the —O—O— bond.~~ The majority of the organic peroxides
2412 do not possess oxidising properties; their main hazards are reactivity and flammability. Under
2413 CLP organic peroxides are comprised in a separate hazard class (CLP Annex I, 2.15) and they
2414 must not be considered according to the procedures described for oxidising liquids. Organic
2415 peroxides were classified as oxidising (O; R7) according to the DSD, which was not appropriate
2416 since the vast majority of them do not exhibit oxidising properties.

2417 Inorganic oxidising liquids are not flammable and therefore do not have to be subjected to the
2418 classification procedures for the hazard classes flammable liquids or pyrophoric liquids. Also
2419 other liquids that are classified as oxidising liquids are normally not flammable, although a few
2420 exemptions may exist. Expert judgement should be sought in case of doubt.

2421 **3.14.4. Classification of substances and mixtures as oxidising liquids**

2422 **3.14.4.1. Identification of hazard information**

2423 Oxidising liquids may cause, or contribute to, the combustion of other material. Although the
2424 definition states that they generally do this by yielding oxygen, halogens can behave in a similar
2425 way. Therefore, any substance or mixture containing oxygen and/or halogen atoms should in
2426 principle be considered for inclusion into the hazard class oxidising liquids. This does not
2427 necessarily mean that every substance or mixture containing oxygen and/or halogen atoms
2428 should be subjected to the full testing procedure.

2429 **3.14.4.2. Screening procedures and waiving of testing**

2430 Liquids that are classified as explosives should not be subjected to the testing procedures for
2431 oxidising liquids.

2432 Organic peroxides should be considered for classification within the hazard class organic
2433 peroxides, see Chapter [Error! Reference source not found.](#) of this guidance. ~~For exceptional~~
2434 ~~cases, in particular low concentrated peroxyacetic acid formulations see 2nd paragraph in section~~
2435 ~~2.15.6.~~

2436 ~~Experience in the handling and use of substances or mixtures which shows them to be oxidising~~
2437 ~~is an important additional factor in considering classification as oxidising liquids. In the event of~~
2438 ~~divergence between test results and known experience, judgement based on known experience~~
2439 ~~should take precedence over test results.~~

2440 Before submitting a substance or a mixture to the full test procedure, an evaluation of its
2441 chemical structure may be very useful as it may prevent unnecessary testing. The person
2442 applying this procedure should have sufficient experience in testing and in theoretical evaluation
2443 of hazardous substances and mixtures. ~~Some substances may react exothermally with the~~
2444 ~~hydroxy groups in the cellulose molecule without affecting its polymeric structure. This reaction~~
2445 ~~occurs spontaneously upon mixing and should not be interpreted as an oxidation. Substances~~
2446 ~~known for such false positive behaviour are isocyanates and acid halides. Further, the following~~
2447 ~~text provides a guideline for the theoretical evaluation of potential oxidising properties on basis~~
2448 ~~of its composition and chemical structure. In case of doubt, the full test must be performed.~~

2449 ~~The CLP text comprises the following screening considerations:~~

Annex I: 2.13.4.1.

~~For organic substances or mixtures the classification procedure for this hazard class need not~~

to be applied if:

(a) the substance or mixture does not contain oxygen, fluorine or chlorine; or

(b) the substance or mixture contains oxygen, fluorine or chlorine and these elements are chemically bonded only to carbon or hydrogen.

2.13.4.2.

For inorganic substances or mixtures, the classification procedure for this hazard class need not be applied if they do not contain oxygen or halogen.

~~For organic substances or mixtures the classification procedure for this hazard class need not to be applied if:~~

~~a. the substance or mixture does not contain oxygen, fluorine or chlorine; or~~

~~b. the substance or mixture contains oxygen, fluorine or chlorine and these elements are chemically bonded only to carbon or hydrogen.~~

~~For inorganic substances or mixtures, the classification procedure for this hazard class need not be applied if they do not contain oxygen or halogen.~~

On basis of this theoretical evaluation only a distinction can be made between 'potentially oxidising' (i.e. further testing required) and 'non-oxidising' (i.e. no further testing for this hazard class required). It is not possible to assign a hazard category on basis of a theoretical evaluation. Even though classification cannot be excluded based on screening, in some cases it might not be necessary to test a substance or mixture. However, this decision requires expert judgement.

Any substance or mixture that complies with the above waiving criteria can be safely regarded to have no oxidising properties and, hence, needs not to be tested and needs not to be regarded as an oxidising liquid. However, such a substance or mixture may still possess other hazardous properties that require classification into another hazard class.

In case a mixture of an oxidising substance and a non-hazardous inert substance is offered for classification, the following should be taken into account:

- An inert material by definition does not contribute to the oxidising capability of the oxidising substance. Hence, the mixture can never be classified into a more severe hazard category.
- If an oxidising substance is mixed with an inert material, the oxidising capability of the mixture does not linearly decrease with decreasing content of oxidising substance. The relationship is more or less logarithmic and depends on the characteristics of the oxidising substance. For instance, a mixture containing 50 % of a strong oxidiser and 50 % of an inert material may retain 90 % of the oxidising capability of the original oxidising component. Non-testing classification of mixtures based solely on test data for the original oxidising substance should therefore be done with extreme care and only, if sufficient experience in testing exists.
- The determination of the oxidising properties of an aqueous solution of solid oxidising substances and the classification as an oxidising mixture is not necessary provided that the total concentration of all solid oxidisers in the aqueous solution is less than or equal to 20 % (w/w).

2484
2485

3.14.4.3. Classification criteria

2486 The testing procedures for oxidising liquids are based on the capability of an oxidising liquid to
2487 enhance the combustion of a combustible material. Therefore, in the applicable test method
2488 substances and mixtures that are submitted for classification testing are mixed with a
2489 combustible material. ~~In principle, dried fibrous cellulose is used as a combustible material.~~
2490 The mixture of the potentially oxidising liquid and cellulose is then ignited and its behaviour is
2491 observed and compared to the behaviour of reference materials.

2492 For liquids the mixture with cellulose is ignited under confinement in an autoclave and the
2493 pressure rise rate that is caused by the ignition and the subsequent reaction is recorded. The
2494 pressure rise rate is compared to that of three reference material mixtures. The higher the
2495 pressure rise rate, the stronger the oxidising capability of the liquid tested.

Annex I: 2.13.2.1.

An oxidising liquid shall be classified in one of the three categories for this class using test O.2 in Part III, sub-section 34.4.2 of the UN RTDG, Manual of Tests and Criteria in accordance with Table 2.13.1:

Table 2.13.1

Criteria for oxidising liquids

Category	Criteria
1	Any substance or mixture which, in the 1:1 mixture, by mass, of substance (or mixture) and cellulose tested, spontaneously ignites; or the mean pressure rise time of a 1:1 mixture, by mass, of substance (or mixture) and cellulose is less than that of a 1:1 mixture, by mass, of 50 % perchloric acid and cellulose.
2	Any substance or mixture which, in the 1:1 mixture, by mass, of substance (or mixture) and cellulose tested, exhibits a mean pressure rise time less than or equal to the mean pressure rise time of a 1:1 mixture, by mass, of 40 % aqueous sodium chlorate solution and cellulose; and the criteria for Category 1 are not met.
3	Any substance or mixture which, in the 1:1 mixture, by mass, of substance (or mixture) and cellulose tested, exhibits a mean pressure rise time less than or equal to the mean pressure rise time of a 1:1 mixture, by mass, of 65 % aqueous nitric acid and cellulose; and the criteria for Category 1 and 2 are not met.

2496 For additional information regarding the use of non-testing data see Section [Error! Reference](#)
2497 [source not found.](#) below and Urban, 2007 (see Section [3.14.7](#)).

2498

3.14.4.4. Testing and evaluation of hazard information

2499 The test methods for oxidising liquids are designed to give a final decision regarding their
2500 classification. Apart from testing, also experience in the handling and use of substances or
2501 mixtures which shows them to be oxidising is an important additional factor in considering
2502 classification in this hazard class. The CLP text comprises the following classification
2503 consideration:

Annex I: 2.13.4 Additional Classification Considerations

2.13.4.3 In the event of divergence between test results and known experience in the handling and use of substances or mixtures which shows them to be oxidising, judgements based on known experience shall take precedence over test results.

~~In the event of divergence between test results and known experience, judgement based on known experience should take precedence over test results. However, a~~ substance or mixture must not be classified into a less severe Category or as non-oxidising based on experience only

3.14.4.5. Decision logic

Classification of oxidising liquids is done according to decision logic 2.13 as included in the GHS.


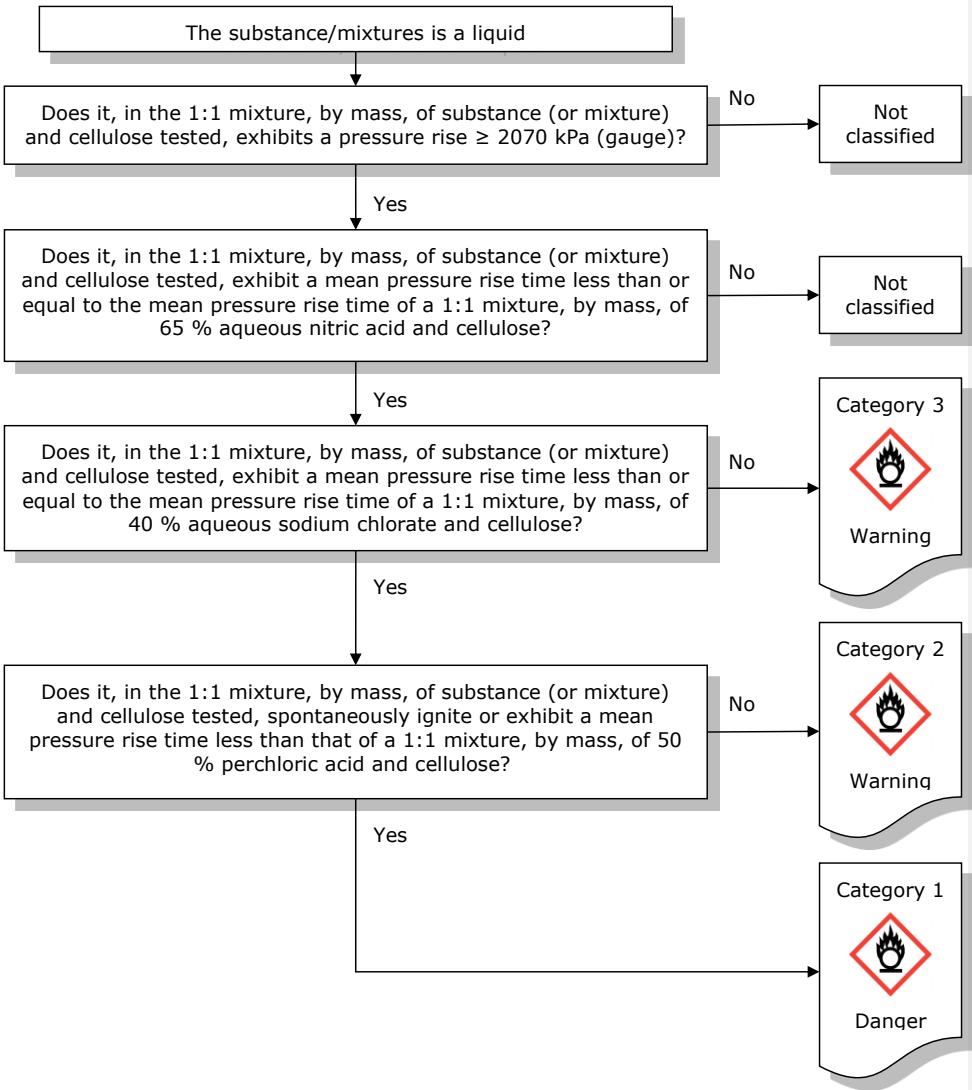
 NOTE: The person responsible for the classification of oxidising liquids should be experienced in this field and be familiar with the criteria for classification.

Figure 13: Decision logic for oxidising liquids (Decision logic 2.13 of GHS)






2511
2512 **3.14.4.6. Hazard communication for oxidising liquids**

2513 **3.14.4.6.1. Pictograms, signal words, hazard statements and precautionary**
2514 **statements**

2515 The pictograms and hazard statements are designed to indicate that oxidising substances and
2516 mixtures may cause or contribute to fire or explosion and therefore in principle should be
2517 separated from combustible materials.

Annex I : Table 2.13.2

Label elements for oxidising liquids			
	Category 1	Category 2	Category 3
GHS Pictograms			
Signal Word	Danger	Danger	Warning
Hazard Statement	H271: May cause fire or explosion; strong oxidiser	H272: May intensify fire; oxidiser	H272: May intensify fire; oxidiser
Precautionary Statement Prevention	P210 P220 P280 P283	P210 P220 P280	P210 P220 P280
Precautionary Statement Response	P306 + P360 P371 + P380 + P37 P370 + P378	P370 + P378	P370 + P378
Precautionary Statement Storage	P420		
Precautionary Statement Disposal	P501	P501	P501

2518 The wording of the Precautionary Statements is found in CLP Annex IV, Part 2.

2519 3.14.5. Relation to transport classification

2520 Division 5.1 within Class 5 of the UN RTDG Model Regulations covers oxidising liquids and
 2521 oxidising solids, using the same tests and criteria as the CLP. Therefore, a liquid substance or
 2522 mixture classified as Division 5.1 (sometimes referred to as Class 5.1) according to any of the
 2523 modal transport regulations (ADR, RID, ADN and IMDG Code, ICAO TI) is normally also classified
 2524 as an oxidising liquid according to the CLP. Packing Groups I, II and III of the transport
 2525 regulations correspond directly to Categories 1, 2 and 3 of the CLP, respectively. See Annex VII
 2526 for additional information on transport classification in relation to CLP classification.

2527 3.14.6. Example of classification for oxidising liquids

2528 3.14.6.1. Example of substances and mixtures fulfilling the classification 2529 criteria

2530 The list of substances and mixtures fulfilling the criteria for classification is only presented for
 2531 information purposes. This list is not exhaustive. For examples of results see Section 34.4.2.5

2532 of UN-MTC.

2533 • Ferric nitrate, saturated aqueous solution

2534 • Lithium perchlorate, saturated aqueous solution

2535 • Magnesium perchlorate, saturated aqueous solution

2536 • Perchloric acid, 55 %

2537 • Sodium nitrate, 45 % aqueous solution

2538 **3.14.6.2. Example of substances and mixtures not fulfilling the classification**
2539 **criteria**

2540 • Nickel nitrate, saturated aqueous solution

2541 • Potassium nitrate, 30 % aqueous solution

2542 • Silver nitrate, saturated aqueous solution

2543 **3.14.7. Reference**

2544 Urban, Peter G. (2007). *Bretherick's Handbook of Reactive Chemical Hazards, Volumes 1-2*
2545 (7th Edition). Elsevier.

2546 **3.15. Oxidising solids**

2547 **3.15.1. Introduction**

2548 The criteria for 'Oxidising solids' are found in Annex I, Section 2.14 of CLP and are identical to
2549 those in Chapter 2.14 of GHS⁴.

2550 The hazard class oxidising solids comprises substances and mixtures whose hazard is
2551 characterised by the fact that, in contact with other materials, they are able to cause or
2552 contribute to the combustion of those materials. The other materials do not necessarily have to
2553 belong to a certain hazard class in order to be affected by the presence of an oxidising solid.
2554 This is for example the case when a liquid fuel (e.g. gas oil) mixes with an oxidising solid. Certain
2555 combinations of combustible materials and oxidising substances or mixtures may even result in
2556 spontaneous combustion, thermal instability or form an explosive mixture, ~~this means that they~~
2557 ~~may have explosive properties or may be regarded as self-reactive substances or mixtures.~~

2558 Although widely known as 'oxidising materials', their hazard and behaviour might be better
2559 understood by considering them to be 'fire enhancing substances'.

2560 ~~The hazards communication of oxidising solids intends to communicate the property that it may~~
2561 ~~cause fire or explosion or that it may intensify fire.~~

2562 Apart from the combustion hazard, the production of toxic and/or irritating fumes may cause an
2563 additional hazard. For example, when nitrates are involved in a fire, nitrous fumes may be
2564 formed.

2565 The testing procedure and criteria for oxidising substances or mixtures ~~are not appropriate do~~
2566 ~~not work properly~~ for ammonium nitrate based products, ~~ammonium nitrate compounds,~~
2567 ~~ammonium nitrate based fertilizers and ammonium nitrate gels.~~ Therefore, ~~for~~ For classification
2568 ~~and labelling of substances and mixtures containing ammonium nitrate, known of such products,~~
2569 ~~experience should be used applied~~ and expert judgement should be sought. ~~For the classification~~

	140	Title
2570	procedures for ammonium nitrate gels—intermediate for blasting explosives, see Section 2.1 of	
2571	this guidance.	
2572	Ammonium nitrate based fertilizers are classified based on their composition according to the	
2573	UN Manual of Tests and Criteria, Section 39. For the classification of ammonium nitrate based	
2574	emulsions, suspensions or gels (intermediate for blasting explosives), see Section 2.1 of this	
2575	guidance.	
	<div> <p>Annex I: 2.14.4.3</p> <p>In the event of divergence between test results and known experience in the handling and use of substances or mixtures which shows them to be oxidising, judgments based on known experience shall take precedence over test results.</p> </div>	
2576		
2577	3.15.2. Definitions and general considerations for classification of oxidising	
2578	solids	
2579	The CLP text comprises the following definition for oxidising solids.	
	<div> <p>Annex I: 2.14.1. Definition</p> <p><i>Oxidising solid means a solid substance or mixture which, while in itself is not necessarily combustible, may, generally by yielding oxygen, cause, or contribute to, the combustion of other material.</i></p> </div>	
2580	<u>Special consideration on particle size</u>	
2581	The oxidising properties of a solid depend on its particle size. Smaller particles enable a more	
2582	intimate contact between the solid oxidiser and a combustible solid. The smaller the particle size,	
2583	the higher the oxidising capability of the solid. As a consequence, it may happen that large	
2584	particles of a certain solid are considered to be non-hazardous, while small particles of the same	
2585	solid need to be classified into the hazard class of oxidising solids. <u>In rare cases, very small</u>	
2586	<u>particles of a solid oxidiser may even show explosive properties (e.g. ammonium perchlorate).</u>	
2587	Hence it is very important that oxidising properties for solids are investigated on the substance	
2588	or mixture as it is actually presented (including how it can reasonably be expected to be used,	
2589	see Article 8 (6) of CLP). This is indicated by the Note 2 cited in CLP Annex I, 2.14.2.1.	
	<div> <p>Annex I: 2.14.2.1.</p> <p>[...]</p> <p><i>Note 2: The test shall be performed on the substance or mixture in its physical form as presented. If for example, for the purposes of supply or transport, the same chemical is to be presented in a physical form different from that which was tested and which is considered likely to materially alter its performance in a classification test, the substance shall also be tested in the new form.</i></p> </div>	
2590		
2591	3.15.3. Relation to other physical hazards	
2592	Oxidising solids that are mixed with combustible materials or reducing agents may have	
2593	explosive properties and should be considered for classification in the hazard class Explosives	
2594	(including the applicable screening procedures), see Chapter Error! Reference source not	

2595 **found.** of this guidance.

2596 ~~In rare cases, mixtures with oxidising solids. Such mixtures~~ may also exhibit self-reactive
2597 behaviour, see Chapter **Error! Reference source not found.** of this guidance. Expert
2598 judgement should be sought in case of doubt.

2599 The classification procedure and criteria for oxidising substances and mixtures is not applicable
2600 for organic peroxides. ~~Under DSD organic peroxides were considered to be oxidising substances~~
2601 ~~because of the presence of the O-O bond.~~ The majority of the organic peroxides do not
2602 possess oxidising properties; their main hazards are reactivity and flammability. Under CLP
2603 organic peroxides comprise a separate hazard class (CLP Annex I, 2.15) and they must not be
2604 considered according to the procedures described for oxidising solids. Organic peroxides were
2605 classified as oxidising (O; R7) according to the DSD, which was not appropriate since the vast
2606 majority of them do not exhibit oxidising properties.

2607 Inorganic oxidising solids are not flammable and therefore do not need to be subject to the
2608 classification procedures for the hazard classes flammable solids or pyrophoric solids. Also other
2609 solids **of organic or partially organic nature** that are classified as oxidising solids are normally
2610 not flammable, although a few exceptions may exist. Expert judgement should be sought in case
2611 of doubt.

2612 **3.15.4. Classification of substances and mixtures as oxidising solids**

2613 **3.15.4.1. Identification of hazard information**

2614 Oxidising solids may cause, or contribute to, the combustion of other material. Although the
2615 definition in Annex I: 2.14.1, quoted above, states that they generally do this by yielding oxygen,
2616 halogens can behave in a similar way. Therefore, any substance or mixture containing oxygen
2617 and/or halogen atoms should in principle be considered for inclusion into the hazard categories
2618 oxidising solids. This does not necessarily mean that every substance or mixture containing
2619 oxygen and/or halogen atoms should be subjected to the full testing procedure.

2620 **3.15.4.2. Screening procedures and waiving of testing**

2621 Solids that are classified as explosives should not be subjected to the testing procedures for
2622 oxidising solids.

2623 Organic peroxides should be considered for classification within the hazard class organic
2624 peroxides, see Chapter **Error! Reference source not found.** of this guidance.

2625 ~~Experience in the handling and use of substances or mixtures which shows them to be oxidising~~
2626 ~~is an important additional factor in considering classification as oxidising solids. In the event of~~
2627 ~~divergence between test results and known experience, judgement based on known experience~~
2628 ~~should take precedence over test results.~~

2629 Before submitting a substance or a mixture to the full test procedure, an evaluation of its
2630 chemical structure may be very useful as it may prevent unnecessary testing. The person
2631 applying this procedure should have sufficient experience in testing and in theoretical evaluation
2632 of hazardous substances and mixtures. The following text provides a guideline for the theoretical
2633 evaluation of potential oxidising properties on the basis of its composition and chemical
2634 structure. In case of doubt, the full test must be performed.

2635 ~~For organic substances or mixtures the classification procedure for this hazard class need not~~
2636 ~~be applied if:~~

2637 ~~a. the substance or mixture does not contain oxygen, fluorine or chlorine; or~~

~~b. the substance or mixture contains oxygen, fluorine or chlorine and these elements are chemically bonded only to carbon or hydrogen.~~

~~For inorganic substances or mixtures, the classification procedure for this hazard class need not be applied if they do not contain oxygen or halogen.~~

The CLP text comprises the following screening considerations:

Annex I: 2.14.4.1.

For organic substances or mixtures the classification procedure for this hazard class need not to be applied if:

(a) the substance or mixture does not contain oxygen, fluorine or chlorine; or

(b) the substance or mixture contains oxygen, fluorine or chlorine and these elements are chemically bonded only to carbon or hydrogen.

2.14.4.2.

For inorganic substances or mixtures, the classification procedure for this hazard class need not be applied if they do not contain oxygen or halogen.

On the basis of this theoretical evaluation a distinction can only be made between 'potentially oxidising' (i.e. further testing required) and 'non-oxidising' (i.e. no further testing for this hazard class required). It is not possible to assign a hazard category on the basis of a theoretical evaluation. Even though for 'potentially oxidising' substances, classification cannot be excluded based on screening, in some cases it might not be necessary to test a substance or mixture. However, this decision requires expert judgement.

Any substance or mixture that complies with the above waiving criteria can be safely regarded to have no oxidising properties and, hence, need not be tested and need not be regarded as an oxidising solid. However, such a substance or mixture may still possess other hazardous properties that require classification into another hazard class.

In case a mixture of an oxidising substance and a non-hazardous inert substance is offered for classification, the following should be taken into account:

- An inert material by definition does not contribute to the oxidising capability of the oxidising substance. Hence, the mixture can never be classified into a more severe hazard category.
- If an oxidising substance is mixed with an inert material, the oxidising capability of the mixture does not linearly decrease with decreasing content of oxidising substance. The relationship is more or less logarithmic and depends on the characteristics of the oxidising substance. For instance, a mixture containing 50 % of a strong oxidiser and 50 % of an inert material may retain 90 % of the oxidising capability of the original oxidising component. Non-testing classification of mixtures based solely on test data for the original oxidising substance should therefore be done with extreme care and only if sufficient experience in testing exists.

3.15.4.3. Classification criteria

The testing procedures for oxidising solids are based on the capability of an oxidising solid to

2670 enhance the combustion of a combustible material. Therefore, in the applicable test method
 2671 solids that are submitted to classification testing are mixed with a combustible material. ~~In~~
 2672 ~~principle,~~ dried fibrous cellulose is used as a combustible material. The mixture of the
 2673 potentially oxidising solid and cellulose is then ignited and its behaviour is observed and
 2674 compared to the behaviour of reference material mixtures.

2675 For solids the mixture with cellulose is ignited at atmospheric conditions and the time necessary
 2676 for the combustion reaction to consume the mixture is recorded. The faster the combustion rate,
 2677 the stronger the oxidising capability of the solid tested.

2678 The UN-MTC currently has two methods for the determination of oxidising properties of solids,
 2679 i.e. tests O.1 and O.3. In test O.1, the reaction between the oxidiser and the combustible
 2680 material is observed visually while in test O.3 a gravimetric method is applied. Both methods
 2681 can be used although in certain cases the one or the other method may be preferred. In this
 2682 case, expert judgement should be sought.

Annex I: 2.14.2.1. An oxidising solid shall be classified in one of the three categories for this class using test O.1 in Part III, sub-section 34.4.1 or test O.3 in Part III, sub-section 34.4.3 of the UN RTDG, Manual of Tests and Criteria, in accordance with Table 2.14.1:

Table 2.14.1

Criteria for oxidising solids

Category	Criteria using test O.1	Criteria using test O.3
1	Any substance or mixture which, in the 4:1 or 1:1 sample-to-cellulose ratio (by mass) tested, exhibits a mean burning time less than the mean burning time of a 3:2 mixture, (by mass), of potassium bromate and cellulose.	Any substance or mixture which, in the 4:1 or 1:1 sample-to-cellulose ratio (by mass) tested, exhibits a mean burning rate greater than the mean burning rate of a 3:1 mixture (by mass) of calcium peroxide and cellulose.
2	Any substance or mixture which, in the 4:1 or 1:1 sample-to-cellulose ratio (by mass) tested, exhibits a mean burning time equal to or less than the mean burning time of a 2:3 mixture (by mass) of potassium bromate and the criteria for Category 1 are not met.	Any substance or mixture which, in the 4:1 or 1:1 sample-to-cellulose ratio (by mass) tested, exhibits a mean burning rate equal to or greater than the mean burning rate of a 1:1 mixture (by mass) of calcium peroxide and cellulose and the criteria for Category 1 are not met.
3	Any substance or mixture which, in the 4:1 or 1:1 sample-to-cellulose ratio (by mass) tested, exhibits a mean burning time equal to or less than the mean burning time of a 3:7 mixture (by mass) of potassium bromate and cellulose and the criteria for Categories 1 and 2 are not met.	Any substance or mixture which, in the 4:1 or 1:1 sample-to-cellulose ratio (by mass) tested, exhibits a mean burning rate equal to or greater than the mean burning rate of a 1:2 mixture (by mass) of calcium peroxide and cellulose and the criteria for Categories 1 and 2 are not met.

Note 1

Some oxidising solids also present explosion hazards under certain conditions (when stored in large quantities). Some types of ammonium nitrate may give rise to an explosion hazard under extreme conditions and the 'Resistance to detonation test' (IMSBC Code (International Maritime Solid Bulk Cargoes Code, IMO), Appendix 2, Section 5) can be used to assess this hazard. Appropriate information shall be made in the SDS.

Note 1 may also apply to other oxidising ammonium salts. Experience indicates that the conditions required for ammonium nitrate to present an explosion hazard involve a combination of factors, such as storage in large volumes (multiple tonnes) and either contamination (e.g. with metals, acids, organics) or excessive heat (e.g. under conditions of fire). The resistance to detonation (RTD) test is extensively described in Regulation (EC) No 2003/2003 for ammonium nitrate.

For additional information regarding the use of non-testing data see Section [Error! Reference source not found.](#) below and Urban, 2007 (see Section [Error! Reference source not found.](#)).

3.15.4.4. Testing and evaluation of hazard information

~~The test methods¹⁷ for oxidising solids are designed to give a final decision regarding their classification. It should be recalled that experience in the handling and use of substances or mixtures, besides testing, is an important additional factor in considering classification in this hazard class. The test methods for oxidising solids are designed to give a final decision regarding their classification. Apart from testing, also experience in the handling and use of substances or mixtures which shows them to be oxidising is an important additional factor in considering classification in this hazard class. The CLP text comprises the following classification consideration:~~

Annex I: 2.14.4 Additional Classification Considerations

2.14.4.3

In the event of divergence between test results and known experience in the handling and use of substances or mixtures which shows them to be oxidising, judgements based on known experience shall take precedence over test results.

~~A substance or mixture must not be classified into a less severe Category or as non-oxidising based on experience only.~~

3.15.4.5. Decision logic


Classification of oxidising solids is done according to decision logic 2.14 as included in the GHS.






NOTE: The person responsible for the classification of oxidising solids should be experienced in this field and be familiar with the criteria for classification.

Figure 14: Decision logic for oxidising solids (Decision logic 2.14 of GHS)

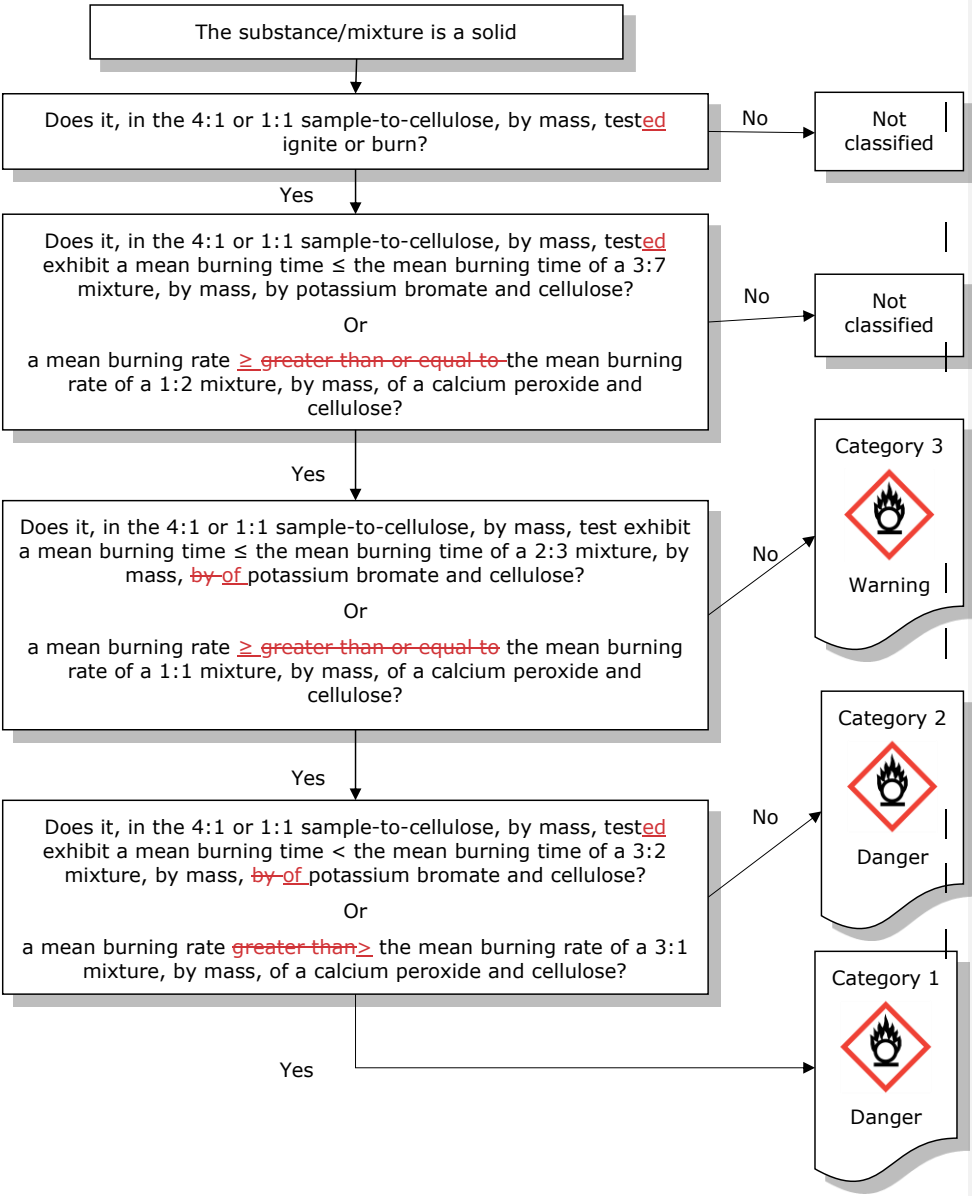¹⁷ As from December 2012 an alternative test method for oxidising solids, Test O.3, has been included in the UN-MTC (see document ST/SG/AC.10/40/Add.2). Test O.3 is an improved version of Test O.1 using a different reference substance and gravimetric measurements of the burning rate. Reference to Test O.3 has been included in the 5th revised edition of the GHS.



2710 mixtures may cause or contribute to fire or explosion and therefore in principle should be
 2711 separated from combustible materials.

Annex I: Table 2.14.2			
Label elements for oxidising solids			
	Category 1	Category 2	Category 3
GHS Pictograms			
Signal Word	Danger	Danger	Warning
Hazard Statement	H271: May cause fire or explosion; strong oxidiser	H272: May intensify fire; oxidiser	H272: May intensify fire; oxidiser
Precautionary Statement Prevention	P210 P220 P280 P283	P210 P220 P280	P210 P220 P280
Precautionary Statement Response	P306 + P360 P371 + P380 + P373 P370 + P378	P370 + P378	P370 + P378
Precautionary Statement Storage	P420		
Precautionary Statement Disposal	P501	P501	P501

2712 The wording of the Precautionary Statements is found in CLP Annex IV, Part 2.

2713 3.15.6. Relation to transport classification

2714 Division 5.1 within Class 5 of the UN RTDG Model Regulations covers oxidising liquids and
 2715 oxidising solids, using the same tests and criteria as the CLP. Therefore, a solid substance or
 2716 mixture classified as Division 5.1 (sometimes referred to as Class 5.1) according to any of the
 2717 modal transport regulations (ADR, RID, ADN and IMDG Code, ICAO TI) is normally also classified
 2718 as an oxidising solid according to CLP. Packing Groups I, II and III of the transport regulations
 2719 correspond directly to Categories 1, 2 and 3 of CLP, respectively. See Annex VII for additional
 2720 information on transport classification in relation to CLP classification.

2721 **3.15.7. Example of classification for oxidising solids**2722 **3.15.7.1. Example of substances and mixtures fulfilling the classification**
2723 **criteria**

2724 The list of substances and mixtures fulfilling the criteria for classification is only presented for
2725 information purposes. Note that oxidising properties of these substances may differ depending
2726 on particle size. This list is not exhaustive. For examples of results see section 34.4. ~~3.61-5~~ of
2727 UN-MTC.

- 2728 • Calcium nitrate, anhydrous
- 2729 • Chromium trioxide
- 2730 • ~~Potassium nitrite~~
- 2731 • Potassium nitrate
- 2732 • Potassium perchlorate
- 2733 • Potassium permanganate
- 2734 • Sodium chlorate
- 2735 • Sodium nitrite
- 2736 • Sodium nitrate
- 2737 • Strontium nitrate, anhydrous

2738
2739 **3.15.7.2. Example of substances and mixtures not fulfilling the classification**
2740 **criteria**

- 2741 • Calcium nitrate, tetrahydrate
- 2742 • Cobalt nitrate, hexahydrate

2743 **3.15.8. Reference**

2744 Urben, Peter G. (2007). *Bretherick's Handbook of Reactive Chemical Hazards, Volumes 1-2*
2745 (7th Edition). Elsevier.

2746 **3.16. Organic peroxides**2747 **3.16.1. Introduction**

2748 The criteria for 'Organic peroxides' are found in Annex I, Section 2.15 of CLP and are identical
2749 to those in Chapter 2.15 of GHS⁴.

2750 The hazard class organic peroxides is unique in the respect that it is the only category to which
2751 chemicals are assigned on the basis of their chemical structure. Organic peroxides cannot be
2752 seen as an 'intrinsic property'; it is a family of chemical substances and mixtures which may
2753 have various properties. However, the type of peroxide is determined by testing.

3.16.2. Definitions and general considerations for classification of organic peroxides

In CLP, the following definition is given for organic peroxides.

Annex I: 2.15.1. Definition

Organic peroxides means liquid or solid organic substances which contain the bivalent -O-O- structure and may be considered derivatives of hydrogen peroxide, where one or both of the hydrogen atoms have been replaced by organic radicals. The term organic peroxide includes organic peroxide mixtures (formulations) containing at least one organic peroxide. Organic peroxides are thermally unstable substances or mixtures, which can undergo exothermic self-accelerating decomposition. In addition, they can have one or more of the following properties:

(i) be liable to explosive decomposition;

(ii) burn rapidly;

(iii) be sensitive to impact or friction;

(iv) react dangerously with other substances.

2.15.1.2. *An organic peroxide is regarded as possessing explosive properties when in laboratory testing the mixture (formulation) is liable to detonate, to deflagrate rapidly or to show a violent effect when heated under confinement.*

3.16.3. Relation to other physical hazards

In addition to the definition (CLP Annex I, 2.15.1), organic peroxides may:

a. be flammable;

b. emit flammable gas when heated.

In general, organic peroxides do not have or have only weak oxidising properties and thus are not classified as oxidisers but they are a distinct hazard class.

The additional (subsidiary) labelling, as indicated in the list of classified organic peroxides included in the UN RTDG Model Regulations, Section 2.5.3.2.4, represents the additional hazardous properties.

Neither the burning properties nor the sensitivity to impact and friction form part of the classification procedure for organic peroxides in CLP. However, these properties may be of importance for the safe handling of organic peroxides (see Section [Error! Reference source not found.](#), additional testing).

In addition, the following should be noted:

Explosive properties

The explosive properties do not have to be determined according to the CLP Annex I, Chapter 2.1, because explosive properties are incorporated in the ~~decision logic for classification of~~ organic peroxides. ~~Note that organic peroxides may have explosive properties when handled~~

2776 ~~under higher confinement.~~

2777 ~~Flammable properties~~

2778 ~~The hazard statement for flammable properties for liquid organic peroxides should be based on~~
2779 ~~the appropriate category for flammable liquids, as long as the flash point is relevant, (see Section~~
2780 ~~2.15.4.3.2). The translation table in Annex VII to CLP can be used for this.~~

2781 **3.16.4. Classification of substances and mixtures as organic peroxides**

2782 **3.16.4.1. Identification of hazard information**

2783 ~~As a consequence of the hazard class definition, if the chemical structure does not contain the~~
2784 ~~bivalent -O-O- structure, the substance is not classified as organic peroxide.~~

2785 The classification of an organic peroxide in one of the seven categories 'Types A to G' is
2786 dependent on its detonation, deflagration and thermal explosion properties, its response to
2787 heating under confinement, its explosive power and the concentration and the type of diluent
2788 added to desensitize the organic peroxide. Specifications of acceptable diluents that can be
2789 used safely are given in the UN RTDG Model Regulations, 2.5.3.5. The classification of an organic
2790 peroxide as Type A, B or C is dependent on the type of packaging in which the organic peroxide
2791 is tested as it affects the degree of confinement to which the organic peroxide is subjected. This
2792 has to be considered when handling the organic peroxide; stronger packaging may result in more
2793 violent reactions when the organic peroxide decomposes. This is why it is important that storage
2794 and transport is done in packaging, allowed for the type of organic peroxide, that conforms the
2795 requirements of the UN-packaging or IBC instruction (P520/IBC520) or tank instruction (T23).

2796 ~~The traditional aspects of explosive properties, such as detonation, deflagration and thermal~~
2797 ~~explosion, are incorporated in the decision logic of CLP Figure 2.15.1. Consequently, explosive~~
2798 ~~property determination as prescribed for the hazard class 'explosives' needs not to be conducted~~
2799 ~~for organic peroxides.~~

2800 A list of currently classified organic peroxides is included in the UN RTDG Model regulations,
2801 Section 2.5.3.2.4.

2802 **3.16.4.2. Classification criteria**

2803 ~~In CLP, organic peroxides are not classified as oxidisers but they are a distinct hazard class.~~

Annex I: 2.15.2.1. Any organic peroxide shall be considered for classification in this class,
unless it contains:

a) not more than 1,0 % available oxygen from the organic peroxides when containing not
more than 1,0 % hydrogen peroxide; or

b) not more than 0,5% available oxygen from the organic peroxides when containing more
than 1,0 % but not more than 7,0 % hydrogen peroxide.

[...]

2804 In CLP decision logic Annex I, Figure 2.15.1, classification of organic peroxides is based on
2805 performance based testing both small scale tests and, where necessary, some larger scale test
2806 with the organic peroxide in its packaging. The concept of 'intrinsic properties' is, therefore, not
2807 applicable to this hazard class.

2808 Organic peroxides are classified into one of the seven categories of 'Types A to G' according to
2809 the classification criteria of CLP. The classification principles are given in decision logic Figure

2810 2.15.1 of CLP and the Test Series A to H, as described in the Part II of the UN-MTC, should be
2811 performed.

Annex I: 2.15.2.2. *Organic peroxides shall be classified in one of the seven categories of 'Types A to G' for this class, according to the following principles:*

- (a) any organic peroxide which, as packaged, can detonate or deflagrate rapidly shall be defined as organic peroxide TYPE A;*
- (b) any organic peroxide possessing explosive properties and which, as packaged, neither detonates nor deflagrates rapidly, but is liable to undergo a thermal explosion in that package shall be defined as organic peroxide TYPE B;*
- (c) any organic peroxide possessing explosive properties when the substance or mixture as packaged cannot detonate or deflagrate rapidly or undergo a thermal explosion shall be defined as organic peroxide TYPE C;*
- (d) any organic peroxide which in laboratory testing:*
 - (i) detonates partially, does not deflagrate rapidly and shows no violent effect when heated under confinement; or*
 - (ii) does not detonate at all, deflagrates slowly and shows no violent effect when heated under confinement; or*
 - (iii) does not detonate or deflagrate at all and shows a medium effect when heated under confinement;**shall be defined as organic peroxide TYPE D;*
- (e) any organic peroxide which, in laboratory testing, neither detonates nor deflagrates at all and shows low or no effect when heated under confinement shall be defined as organic peroxide TYPE E;*
- (f) any organic peroxide which, in laboratory testing, neither detonates in the cavitated state nor deflagrates at all and shows only a low or no effect when heated under confinement as well as low or no explosive power shall be defined as organic peroxide TYPE F;*
- (g) any organic peroxide which, in laboratory testing, neither detonates in the cavitated state nor deflagrates at all and shows no effect when heated under confinement nor any explosive power, provided that it is thermally stable, i.e. the SADT is 60 °C or higher for a 50 kg package⁽¹⁾, and, for liquid mixtures, a diluent having a boiling point of not less than 150 °C is used for desensitisation, shall be defined as organic peroxide TYPE G. If the organic peroxide is not thermally stable or a diluent having a boiling point less than 150 °C is used for desensitisation, the organic peroxide shall be defined as organic peroxide TYPE F.*

Where the test is conducted in the package form and the packaging is changed, a further test shall be conducted where it is considered that the change in packaging will affect the outcome of the test.

⁽¹⁾ See UN RTDG, Manual of Test and Criteria, sub-sections 28.1, 28.2, 28.3 and Table 28.3.

2812 A list of currently classified organic peroxides is included in the UN RTDG Model Regulations,
2813 Section 2.5.3.2.4.

2814 **3.16.4.3. Testing and evaluation of hazard information**

2815 **3.16.4.3.1. Thermal stability tests and temperature control**

2816 In addition to the classification tests given in decision logic Figure 2.15.1 of CLP, the thermal
2817 stability of the organic peroxide has to be assessed in order to determine the SADT. For the
2818 determination of the SADT, the testing method in UN-MTC, Part II, Section 28, may be used.

2819 The SADT is defined as the lowest temperature at which self-accelerating decomposition of an
2820 organic peroxide may occur in the packaging as used in transport, handling and storage. The
2821 SADT is a measure of the combined effect of the ambient temperature, decomposition kinetics,
2822 package size and the heat transfer properties of the organic peroxide and its packaging.

2823 There is no relation between the SADT of an organic peroxide and its classification in one of the
2824 seven categories 'Types A to G'. The SADT is used to derive safe handling, storage and transport
2825 temperatures (control temperature) and alarm temperature (emergency temperature).

2826 Depending on its SADT an organic peroxide needs temperature control and the rules as given in
2827 CLP Annex I, 2.15.2.3, consist of the following two elements:

2828 1. Criteria for temperature control:

2829 The following organic peroxides need to be subjected to temperature control:

- 2830 a. Organic peroxide types B and C with a SADT ≤ 50 °C;
- 2831 b. Organic peroxide type D showing a medium effect when heated under
2832 confinement with a SADT ≤ 50 °C or showing a low or no effect when heated
2833 under confinement with a SADT ≤ 45 °C; and
- 2834 c. Organic peroxide types E and F with a SADT ≤ 45 °C.

2835 2. Derivation of control and emergency temperatures:

Type of receptacle	SADT *	Control temperature	Emergency temperature
Single packaging and IBC's	20 °C or less	20 °C below SADT	10 °C below SADT
	over 20 °C to 35 °C	15 °C below SADT	10 °C below SADT
	over 35 °C	10 °C below SADT	5 °C below SADT
Tanks	< 50 °C	10 °C below SADT	5 °C below SADT

2836 * i.e. the SADT of the organic peroxide as packaged for transport, handling and storage

2837 It should be emphasized that the SADT is dependent on the nature of the organic peroxide itself,
2838 together with the volume and heat-loss characteristics of the packaging or vessel in which the
2839 organic peroxide is handled. The temperature at which self-accelerating decomposition occurs
2840 falls:

- 2841 • as the size of the packaging or vessel increases; and
- 2842 • with increasing efficiency of the insulation on the package or vessel.

2843 The SADT is only valid for the organic peroxide as tested and when handled properly. Mixing the

organic peroxide with other chemicals, or contact with incompatible materials (including incompatible packaging or vessel material) may reduce the thermal stability due to catalytic decomposition, and lower the SADT. This may increase the risk of decomposition and has to be avoided.

3.16.4.3.2. Additional considerations and testing

Explosive properties

The sensitivity of organic peroxides to impact (solids and liquids) and friction (solids only) may be of importance for the safe handling of the organic peroxide if they have pronounced explosive properties (e.g. they are liable to detonate, to deflagrate rapidly or show a violent effect when heated under confinement). Test methods to determine these properties are described in Test Series 3 of the UN-MTC (see Test 3 (a) (ii) and 3 (b) (i)). This information on the mechanical sensitivity ~~should~~could be included in the SDS.

Burning properties

In some national storage guidelines the burning rate is commonly used for classification for the purposes of storage and consequential storage requirements. Test methods are incorporated in these national storage regulations.

Flash point

The flash point for liquid organic peroxides is only relevant in the temperature range where the organic peroxide is thermally stable. Above the SADT of the organic peroxide determination of the flash point is not relevant because decomposition products are evolved.



NOTE: In case a flash point determination seems reasonable (expected flash point below the SADT) a test method using small amount of sample is recommended. In case the organic peroxide is diluted or dissolved, the diluent may determine the flash point.

Auto-ignition temperature

The determination of the auto ignition temperature is not relevant for organic peroxides. Available test methods are for non-decomposing vapour phases but the vapours of organic peroxides decompose during execution of the test and auto ignition of these organic peroxide vapours can never be excluded. This information should be included in the SDS.

Self-ignition temperature

~~Also the~~ The determination of the self-ignition temperature (applicable for solids) is not relevant, ~~since the~~ since the thermal stability of organic peroxides is quantitatively given by the SADT.

Control and Emergency temperatures

The Control and Emergency temperatures are based on the SADT as in most cases determined by UN Test Series H.4. In UN Test Series H.2 and H.3, the heat loss applied in the calculating the SADT should be representative for the packaging, IBC, tank or vessel in which the substance or mixture is handled or stored. In UN Test H.4, the The Dewar vessel used ~~in the UN Test H.4~~ is supposed to be representative for the organic peroxide handled in packages. For handling the organic peroxide in larger quantities (IBCs/tanks/vessels etc.) and/or in (thermally) insulated containers, the SADT has to be determined for that quantity with that degree of insulation. From that SADT the Control and Emergency temperatures can be derived (see also Section Error! Reference source not found.).

2882 3.16.4.3.3. Additional classification considerations

2883 Currently the following properties are not incorporated in the classification of organic peroxides
2884 under the CLP:

- 2885 • mechanical sensitivity i.e. impact and friction sensitivity (for handling purposes);
- 2886 • burning properties (for storage purposes);
- 2887 • flash point for liquids; and
- 2888 • burning rate for solids.

2889 Furthermore:

Annex I: 2.15.4.2. Mixtures of already classified organic peroxides may be classified as the same type of organic peroxide as that of the most dangerous component. However, as two stable components can form a thermally less stable mixture, the SADT of the mixture shall be determined.

Note: The sum of the individual parts can be more hazardous than the individual components.

2890 ~~Formulated commercial organic peroxides are classified according to their SADT.~~


2891 3.16.4.4. Decision logic


2892 The decision logic for organic peroxides is applicable according to CLP.

❗ NOTE: The person responsible for the classification of organic peroxides should be experienced in this field and be familiar with the criteria for classification.

2893 ~~Figure 14: Decision logic 2.15 for organic peroxides~~

Annex I: Figure 2.15.1 Organic Peroxide

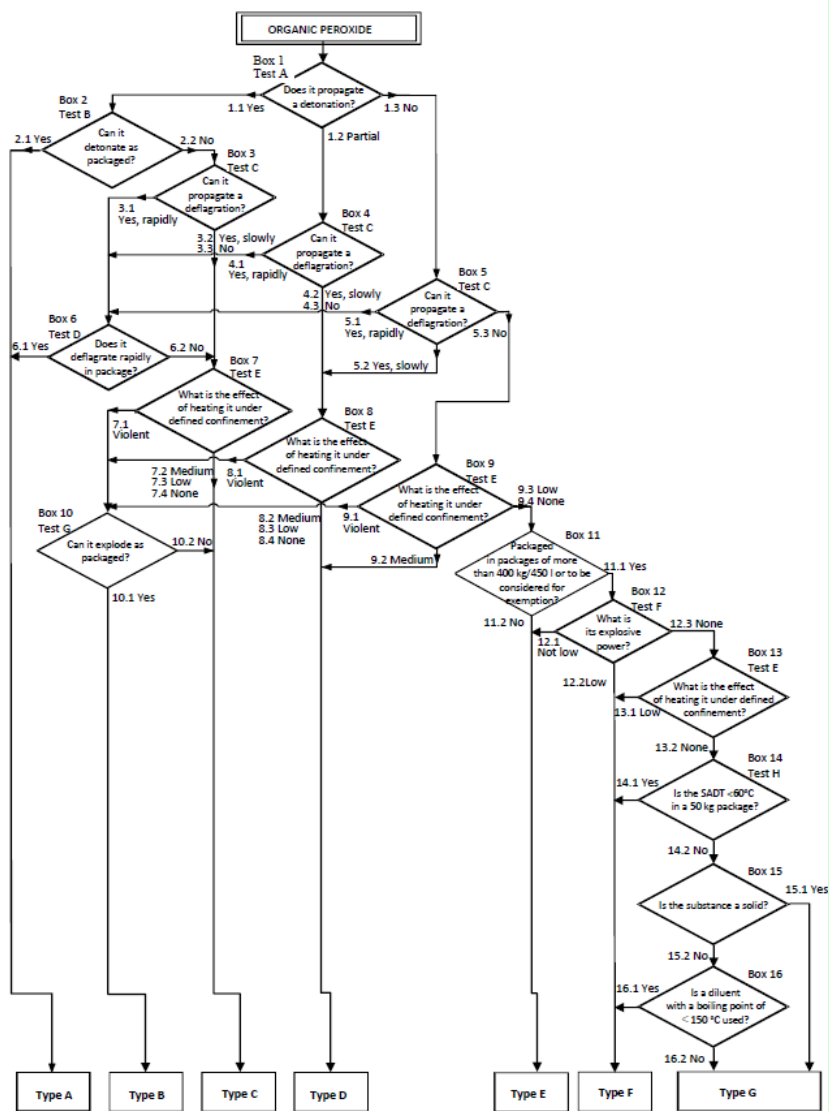

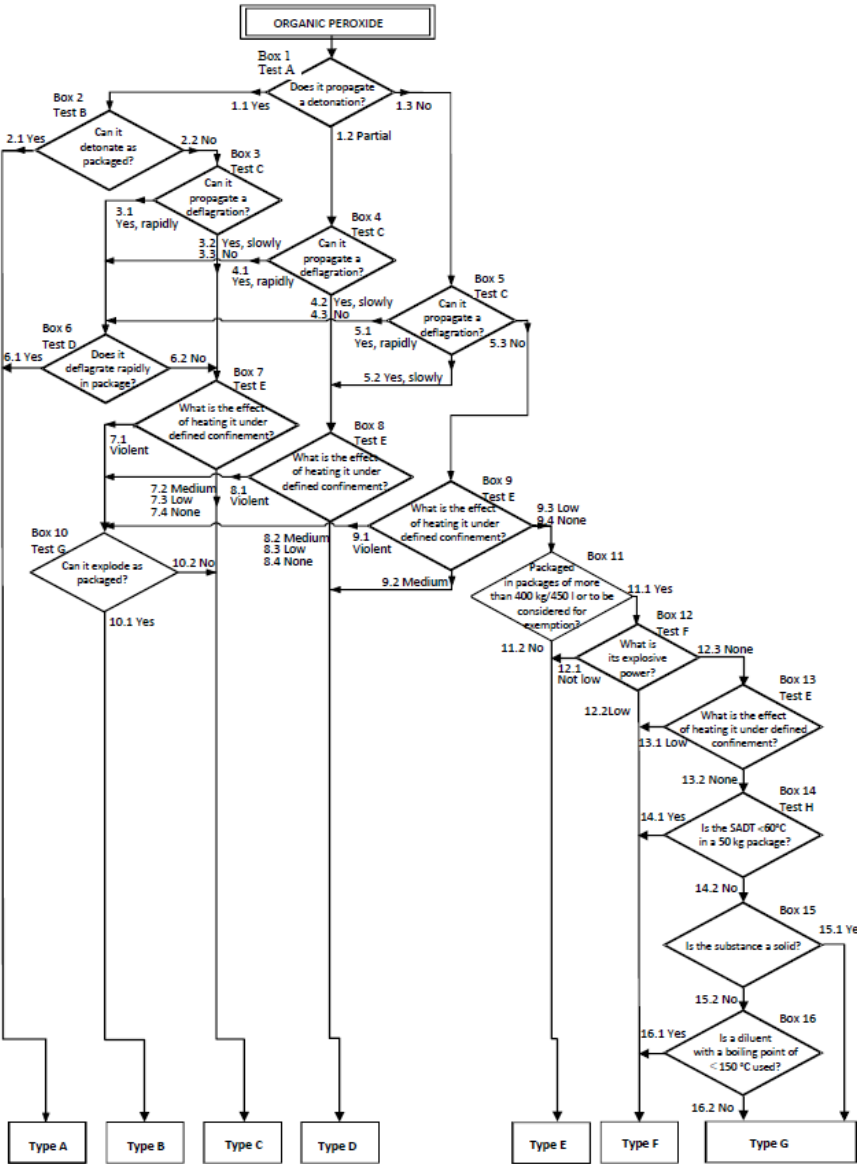

2895
2896






3.16.5. Hazard communication for organic peroxides

3.16.5.1. Pictograms, signal words, hazard statements and precautionary statements

According to CLP the following label elements must be used for organic peroxide meeting the criteria for this hazard class:

Annex I: Table 2.15.1

Label elements for organic peroxides

Classification	Type A	Type B	Type C & D	Type E & F	Type G ¹
GHS pictograms		 			There are no label elements allocated to this hazard category
Signal Word	Danger	Danger	Danger	Warning	
Hazard Statement	H240: Heating may cause an explosion	H241: Heating may cause a fire or explosion	H242: Heating may cause a fire	H242: Heating may cause a fire	
Precautionary statement	P210	P210	P210	P210	
Prevention	P234 P235 P240 P280	P234 P235 P240 P280	P234 P235 P240 P280	P234 P235 P240 P280	
Precautionary statement	P370 + P372 +	P370 + P380 +	P370 + P378	P370 + P378	
Response	P380 + P373	P375[+ P378] ^{1,2}			
Precautionary statement	P403	P403	P403	P403	
Storage	P410	P410	P410	P410	
	P411	P411	P411	P411	
	P420	P420	P420	P420	

Precautionary statement	P501	P501	P501	P501	
Disposal					
¹ <i>Type G has no hazard communication elements assigned but should be considered for properties belonging to other hazard classes.</i>					
² <i>See introduction to Annex I for details on the use of square brackets.</i>					

2902 The wording of the Precautionary Statements is found in CLP Annex IV, Part 2.

2903 3.16.5.2. Additional labelling provisions

2904 Additional hazardous properties, resulting in additional (subsidiary) labelling, are indicated in the
2905 list of classified organic peroxides included in the UN RTDG Model Regulations, section 2.5.3.2.4.

2906 3.16.6. Relation to transport classification

2907 Division 5.2 within Class 5 of the UN RTDG Model Regulations covers organic peroxides. A list of
2908 currently classified organic peroxides is included in the UN RTDG Model Regulations, Section
2909 2.5.3.2.4. This table includes organic peroxides Type B - Type F (and some formulations Type
2910 G, so-called exempted organic peroxides).

2911 An exceptional case in this respect is a peroxyacetic acid formulation, as currently classified in
2912 the UN RTDG Model Regulations under UN 3149, with the following description: HYDROGEN
2913 PEROXIDE AND PEROXYACETIC ACID MIXTURE with acid(s), water and not more than 5 %
2914 peroxyacetic acid, STABILISED. In the classification procedure for organic peroxides, see
2915 decision logic in Section 3.16.4.4, this formulation will be assigned to organic peroxide Type G,
2916 and consequently no label elements are allocated. In view of the above, this formulation can be
2917 classified, also in accordance with CLP, as an Oxidising liquid, Category 2. See Annex VII for
2918 additional information on transport classification in relation to CLP classification.

2919 3.16.7. Example of classification for organic peroxides

2920 3.16.7.1. Example of substances and mixtures fulfilling the classification 2921 criteria

2922 Substance to be classified: Example Peroxide

2923 Molecular formula: n.a.

2924 According to CLP Annex I, Section 2.15.2.1, the substance has an active oxygen content of 7.40
2925 % and thus has to be considered for classification in the hazard class organic peroxides.

2926 Test results and classification according to CLP decision logic 2.15.1 for organic peroxides and
2927 the UN-MTC, Part II, is as follows:

CLASSIFICATION TEST RESULTS	
1. Name of the organic peroxide:	Example Peroxide
2. General data	
2.1. Composition:	Example Peroxide, technically pure (97 %)
2.2. Molecular formula:	n.a. Not applicable

CLASSIFICATION TEST RESULTS		
2.3.	Active oxygen content:	7.18 %
2.4.	Physical form:	L iquid
2.5.	Colour:	c Colourless
2.6.	Density (apparent):	900 kg/m ³
3. Detonation (T est s Series A)		
	Box 1 of the decision logic:	Does the peroxide propagate a detonation?
3.1.	Method:	UN Test A.1: BAM 50/60 steel tube test
3.2.	Sample conditions:	p Peroxide assay 97 %
3.3.	Observations:	f Fragmented part of the tube: 18 cm
3.4.	Result:	No
3.6.	Exit:	1.3
4. Deflagration (t est s Series C)		
	Box 5 of the decision logic:	Can the peroxide propagate a deflagration?
4.1.	Method 1:	Time/pressure test (T est C.1)
4.1.1.	Sample conditions:	a Ambient temperature
4.1.2.	Observations:	4000 ms
4.1.3.	Result:	Yes, slowly
4.2.	Method 2:	Deflagration test (test-Test C.2)
4.2.1.	Sample conditions:	t Temperature: 25 °C
4.2.2.	Observations:	d Deflagration rate: 0.74 mm/s
4.2.3.	Result:	Yes, slowly
4.3.	Final result:	Yes, slowly
4.4.	Exit:	5.2
5. Heating under confinement (T est s Series E)		
	Box 8 of the decision logic:	What is the effect of heating it under confinement?
5.1.	Method 1:	Koenen test (t est E.1)
5.1.1.	Sample conditions:	-
5.1.2.	Observations:	L imiting diameter: 2.0 mm f Fragmentation type 'F'
5.1.3.	Result:	Violent
5.2.	Method 2:	Dutch pressure vessel test

CLASSIFICATION TEST RESULTS	
5.2.1. Sample conditions:	(test E.2) -
5.2.2. Observations:	L imiting diameter: 6.0 mm (with 10 g)
5.2.3. Result:	Medium
5.3. Final result:	Violent
5.4. Exit:	8.1
6. Explosion test in package (test-Test s Series G)	
Box 10 of the decision logic:	Can it explode as packaged?
6.1. Method:	Thermal explosion test in package (t est G.1)
6.2. Sample conditions:	30 litre packaging,
6.3. Observations:	n No fragmentation (N.F.)
6.4. Result:	No
6.5. Exit:	10.2
7. Thermal stability (outside of the decision logic)	
7.1. Method:	Heat accumulation storage test (T est H.4)
7.2. Sample conditions:	m Mass 380 g. Half life time of cooling of Dewar vessel with 400 ml DMP: 10.0 h rs . (representing substance in package)
7.3. Observations: self	a Accelerating decomposition at 35 °C n No self accelerating decomposition at 30 °C
7.4. Result:	SADT 35 °C
8. General remarks:	The decision logic is given in Figure x ¹⁸
9. Final classification	
Hazard class:	Organic peroxide, Type C, liquid, temperature controlled
Label:	Flame (GHS02)
Signal word:	Danger
Hazard statement:	H242: Heating may cause a fire
Temperature control:	Needed based on SADT (35 °C, in package)
Control temperature*:	20 °C (in package)
Emergency temperature*:	25 °C (in package)

¹⁸ Not attached to this example.

*see UN-MTC, table 28.2.

3.16.7.2. Additional remarks

Explosive properties

As shown in Section 3.16.7.1 a substance and a mixture may have explosive properties when handled under greater confinement and where the packaging in which it was tested in UN Test G.1 (see point 6 of classification test results above) is changed. Such information should be given in the SDS.

The example in Section 3.16.7.1 shows a violent effect when heated under confinement (see point 5.3 of the above results). Consequently, also the impact sensitivity according to UN Test Series 3, Test 3 (a) (ii), BAM Fallhammer should be determined. For this example it amounts to 20 J. Such information should be given in the SDS.

Burning properties

For the example in Section 3.16.7.1 the burning properties as determined by the test method described in the storage guidelines, currently in place in France, Germany, Netherlands and Sweden, is 7.0 kg/min/m². Based on this figure and the classification as organic peroxide type C, the storage classification can be assigned in those countries.

Flash point

The example substance thermally decomposes before the temperature at which the vapour can be ignited is reached (see Section 3.16.4.3) and consequently a flash point cannot be determined.

3.17. Corrosive to metals

3.17.1. Introduction

The criteria for 'Corrosive to metals' are found in Annex I, Section 2.16 of CLP and are identical to those in Chapter 2.16 of GHS⁴.

~~The hazard class corrosive to metals is a physico-chemical property that is new in the EU classification scheme and appears for the first time in CLP. So far, only the health hazard corrosivity to skin was considered in the classification scheme. To some extent, both properties relate to each other and, in the context of transport of dangerous goods, have been considered for classification in class 8, despite the different nature of the hazard (material damage versus living tissue damage).~~

A substance or a mixture that is corrosive to metal under normal conditions is a substance or a mixture liable to undergo an irreversible electrochemical reaction with metals that leads to significant damage or, in some cases, even to full destruction of the metallic components. The corrosive to metal property is a quite complex property, since it is a substance (or mixture) related as well as a material (metal) related property. This means a corrosive substance or mixture leads to corroded material (metal), according to a number of external conditions. From the material side, many types of corrosion processes may occur, according to configurations, liquid or fluid media inducing the corrosion process, nature of metal, potential passivation occurring by oxide formation during corrosion.

From the substance or mixture side, many parameters may influence the corrosion properties of a substance or mixture, such as the nature of the chemical or the pH. From an electrochemistry point of view, corrosion conditions are often studied using Pourbaix diagrams, which plot the electrochemical potential (in Volt) that develops according to electrical charges transfer versus

Figure 15: Potential pH (also called Pourbaix) diagram for iron in water at 25 °C, indicating stable form of the Fe element and implicitly, corrosion domains



2976

2976
2977
2978
2979
2980
2981

2982
2983

2984

Annex I: 2.16.1. Definition

A substance or a mixture that is corrosive to metals means a substance or a mixture which by chemical action will materially damage, or even destroy, metals.

A substance or a mixture that is corrosive to metals means a substance or a mixture which by chemical action will materially damage, or even destroy, metals.

2986

2987

2988

2989

2990

2991
2992

According to the test method to be employed for considering classification under this hazard class, we may state at least that gases are out of the scope of the corrosive to metal hazard class. Neither the corrosivity of gases nor the formation of corrosive gases is currently covered by CLP classes and are therefore **not** applicable here.

~~According to the classification criteria~~Based on practical considerations, only substances and mixtures for which the application of the UN Test C.1 (described in part III, Section 37.4.1-1 of the UN-MTC) is relevant and needs to be considered. Application of classification criteria in the UN-MTC, Section 37.4 excludes solids, while 'liquids and solids that may become liquids (during transport)', have to be considered for such a classification.

The wording 'solids that may become liquids' was developed for UN RTDG Model Regulations classification purposes, and needs further explanation. Solids may become liquids by melting (due to increase in temperature). Solids having a melting point lower than 55 °C (which is the test temperature required in UN Test C.1) must then be taken into consideration. The other physical way to transform a solid into liquid is by dissolution in water or another solvent. Classification of solid substances that may become liquids water intake from humid air environment by dissolution is subject to further expert judgement, and may need adaptation of the classification criteria or test protocol (see Section [Error! Reference source not found.](#)). Interaction with liquids may come from air moisture or unintentional contact with water. Other solvent traces may result from the extraction process during manufacturing and these may induce corrosion in practice, as far as it allows some mobility of subsequent ions. Expert judgement would also be required for low melting point solids that also partially convert into gas phase through sublimation process (e.g. methyl isothiocyanate).

Substances and mixtures in a liquid state must be tested without any modification before testing. For other cases (solids that may become liquids), appropriate testing procedures require further work by the Committees of experts in charge of developing and updating the GHS at UN level. It needs to be further specified how such substances or mixtures must be prepared (transformed into liquids) to be able to determine their corrosivity to metals. As an example, it is thought that the quantity of solvent (water or any other solvent) to liquefy the test substance before testing would greatly influence results of the UN Test C.1 test and may not necessarily represent the real life situation of a product during transport, handling or use.

Non-testing data

Following parameters are helpful to evaluate corrosive properties before testing:

- melting points for solids;
- chemical nature of the substances and mixtures under evaluation (e.g. strong acids);
- pH values (liquids).

See also IR & CSA, Chapter R.7a: Endpoint specific guidance, Section R.7.1.2 (Melting point/freezing point).

Literature may also provide information on widely used substances and liquids 'compatibility tables', taking account of the corrosiveness of the products that may serve to decide whether testing must be conducted before assigning the corrosive to metals hazard class, on basis of expert judgement.

The following substances and mixtures should be considered for classification in this class:

- substances and mixtures having acidic or basic functional groups;
- substances or mixtures containing halogen;

- substances able to form complexes with metals and mixtures containing such substances.

3.17.4.2. Screening procedures and waiving of testing

Experience may have proven the corrosivity of given substances and mixtures. In such case no more testing is needed (see examples in Section [Error! Reference source not found.](#)).

Generally extreme pH-values point to a higher likelihood that the substance or mixture is corrosive. However, it cannot lead to immediate classification in the hazard class corrosive to metals. As a proof of that, Figure 15 shows that immunity zones (where steel does not corrode) still exist on the full spectrum of pH values as far as carbon steel is concerned.

Corrosivity is so complex that the evaluation of a mixture cannot be extrapolated from similar behaviour of constituents of a mixture. However, if one significant component of a mixture is corrosive to metals the mixture is likely to be corrosive to metals as well. Testing the actual mixture is therefore highly recommended. As already mentioned, solids are currently difficult to test according to the current CLP requirements, as the UN Test C.1 was designed for liquids.

Where an initial test on either steel or aluminium indicates the substance or mixture being tested is corrosive, the follow up test on the other metal is not required.

3.17.4.3. Classification criteria

Substances and mixtures of hazard class corrosive to metals are classified in a single hazard category on the basis of the outcome of the UN Test C.1 (UN-MTC, Part III, Section 37, paragraph 37.4).

Annex I: Table 2.16.1	
Criteria for substances and mixtures corrosive to metals	
Category	Criteria
1	Corrosion rate on either steel or aluminium surfaces exceeding 6,25 mm per year at a test temperature of 55 °C when tested on both materials.

3.17.4.4. Testing and evaluation of hazard information

3.17.4.4.1. General considerations

It is important to point out that the criteria of corrosion rate will never be applied in an absolute way, but by extrapolating the measured rate of corrosion over the test period to the annual assumed correlating corrosion rate. This exercise has to take account of the fact that the corrosion rate is not necessarily constant over time. Expert judgement may be required to consolidate the optimum test duration and to ascertain test results. However, the possibility of increasing the testing period from minimum one week to four weeks as well as the use of two different metals in the UN Test C.1 act as barriers against erroneous classification.

Whatever the result of the classification may be, the classification as corrosive to metals relates to steel and/or aluminium only and does not provide information with regard to the corrosivity potential to other metals than those tested.

Two types of corrosion phenomena need to be distinguished for classification of substances and mixtures in this hazard class, although not reported in CLP: the uniform corrosion attack and the localised corrosion (e.g. pitting corrosion, shallow pit corrosion).

3072 Table 3: (Section 37.4.1.4.1 of the UN-MTC) translates the corresponding minimum mass loss
3073 rates leading to classify the test substance or mixture as corrosive to metals for standard metal
3074 specimens (2 mm of thickness), according to time of exposure, for reasons of uniform corrosion
3075 process. In case of use of metal plates of a thickness that differs from the specified 2 mm (see
3076 comments in Section 3.17.4.2), the values in Table 3 and Table 4 need adjustments due to the
3077 fact that the corrosion process depends on the surface of specimen.

Table 3: Minimum mass loss of specimens after different exposure times (corresponding to the criterion of 6.25 mm/year, correspond to Table 37.4.1.1 of UN-MTC)

Exposure time (time)	Mass loss (%)
7-days	13.5-%
14-days	26.5-%
21-days	39.2-%
28-days	51.5-%

Table 4: (Section 37.4.1.4.2 of the UN-MTC) indicates the criteria leading to classification of the test substance or mixture as corrosive to metals for standard metal specimens, according to time of exposure, for reasons of localised corrosion process.

Table 4: Minimum intrusion depths after exposure times (corresponding to the criterion of localized corrosion of 6.25 mm/year, correspond to Table 37.4.1.2 of UN-MTC)

Exposure time (time)	Min. intrusion depth (µm)
7-days	120-µm
14-days	240-µm
21-days	360-µm
28-days	480-µm

It is not mentioned explicitly in the text that localised corrosion as well as uniform corrosion has also be taken into account. However, localised corrosion, that is entirely part of UN Test C.1 protocol, has actually to be taken into account. In addition, although the type of corrosion is not reflected in the classification result, this valuable information should be given in the SDS.

3.17.4.4.2. Additional notes on best practice for testing

Competence required for testing

The overall evaluation of appropriate data for considering the corrosion properties of a substance or a mixture and in particular for testing it according to the mentioned criteria for this hazard class requires certain qualifications and experience. Expertise is often needed for this hazard class, which relates to a complex and multi-faceted hazardous phenomenon.

Selection of metal specimens

CLP refers to two types of metals (carbon steel and aluminium) meeting accurate specifications (technical characteristics of metal sheets and plate thickness). Thicker metal sheets, such as cast materials, of which the thickness is reduced to 2 mm by any form of mechanical treatment, may never be used. Mechanical reduction of sheet (metal) thickness could induce corrosion enhanced process due to cross section heterogeneity in metal grain and impurities. It is far better to use slightly different specifications of metal in the correct thickness or slightly different specimen plate thicknesses. It is recognised that it will not always be easy to obtain metal specimens with the profile as described above.

Regarding the type of aluminium or steel to be used for this test see UN-MTC, Sub-section 37.4.1.2.

3106 Minimum corrosive media volume

3107 In order to prevent any limitation on the corrosion process due to full consumption of the
3108 corrosive media before the end of the testing period, a minimum volume of substance or mixture
3109 (1.5 L, according to the UN-MTC) has to be used. (Note: volume/surface ratio of 10 mL/cm² is
3110 stated in DIN 50905, similar in ASTM G31-72.)

3111 Adjustment of the test temperature

3112 Corrosion processes are temperature dependent. In the context of CLP, the property corrosive
3113 to metals is assessed through testing metal specimens at a specified temperature of 55 °C ± 1
3114 °C. In practice, it may be difficult with standard testing equipment to stay within the temperature
3115 window (55 °C ± 1 °C) of the gas phase, all over the test period. In such case, the test can be
3116 performed conservatively at a slightly higher temperature and somewhat lower accuracy (e.g.
3117 57 °C ± 3 °C).

3118 Selecting the appropriate test duration

3119 The evaluation of the criterion of 6.25 mm/year is generally based on a test duration not
3120 exceeding 1 month. There is, however, the option to stop the test procedure already after 1
3121 week (see Table 1). For the decision on test duration, the non-linear behaviour of the corrosion
3122 process must be taken due account of. In borderline cases a non-appropriate test duration may
3123 result in either false positive or false negative results.

3124 Specimen cleaning

3125 Attention must be paid to the correct cleaning of the corroded residue before measurement of
3126 the corrosion characteristics. In case of adhesive corroded layer, the same cleaning process
3127 needs to be carried out on a non corroded sample to verify if the cleaning procedure is not
3128 significantly abrasive. For further information see UN-MTC, Sub-section 37.4.1.3.

3129 Testing soluble solids

3130 As said in Section [Error! Reference source not found.](#), for solids that may become liquids
3131 through dissolution in water or in a solvent, the adequate testing procedure is more complex
3132 (not explicitly describe in the UN C.1 test protocol). In no case will simple dilution of the solid
3133 substance or mixture in any quantity of water lead to satisfactory testing of the substance or
3134 mixture for corrosion to metals.

3135 For the specific case where the corrosion potential is linked to the presence of solvent traces
3136 (other than water), expert judgement is needed to determine if further testing must be
3137 performed (where the solid is put in interaction with the metallic part considered).

3138 Example of equipment relevant for the performance UN Test C.1

3139 **Figure 16: Example of testing equipment available on the market to perform UN Test C.1**




3.17.4.5. Decision logic

Classification of substances and mixtures corrosive to metals is done according to decision logics 2.16.4.1 as included in the GHS.

NOTE: The person responsible for the classification of substances and mixtures corrosive to metals should be experienced in this field and be familiar with the criteria for classification.

Figure 17: Decision logic for substances and mixtures corrosive to metals (Decision logic 2.16 of GHS)

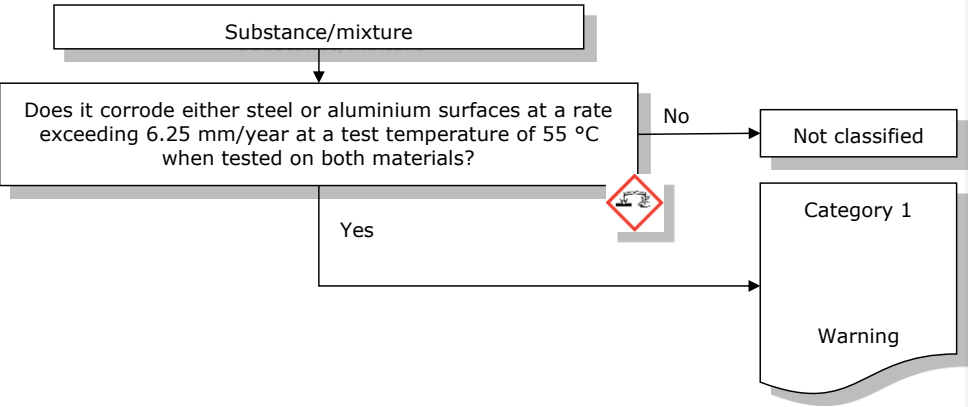

3.17.5. Hazard communication for corrosive to metals

3.17.5.1. Pictograms, signal words, hazard statements and precautionary statements

Table 2.16.2 of CLP Annex I provides the label elements for hazard class corrosive to metals. The hazard statement H290, using the wording 'may', reflects that classification under this hazard class does not cover all metals (testing only considers carbon steel and aluminium). Thus we may find examples of substances and mixtures that are classified in this hazard class corrosive to metals but will not induce corrosive action on other more corrosive resistant metals (e.g. platinum) than those serving as reference materials.

Label elements must be used for substances and mixtures meeting the criteria for classification in this hazard class in accordance with Table 2.16.2.

Annex I: 2.16.3. Table 2.16.2	
Label elements for substances and mixtures corrosive to metals	
Classification	Category 1
GHS Pictogram	
Signal Word	Warning
Hazard Statement	H290: May be corrosive to metals
Precautionary Statement, Prevention	P234
Precautionary Statement, Response	P390
Precautionary Statement, Storage	P406
Precautionary Statement, Disposal	

Note:

Where a substance or mixture is classified as corrosive to metals but not corrosive to skin and/or eyes, the labelling provisions set out in Section 1.3.6 shall be used.

3160 The wording of the Precautionary Statements is found in CLP Annex IV, Part 2.

3161 Further, in Section 1.3.6 of CLP Annex I a derogation from labelling requirements for substances
3162 or mixtures classified as corrosive to metals but not corrosive to skin and/or eyes is provided.

Annex I: 1.3.6 Substances or mixtures classified as corrosive to metals but not classified as skin corrosion or as serious eye damage (Category 1)

Substances or mixtures classified as corrosive to metals but not classified as skin corrosion or as serious eye damage (Category 1) which are in the finished state as packaged for consumer use do not require on the label the hazard pictogram GHS05.

3163
3164 **3.17.6. Relation to transport classification**

3165 Class 8 of the UN RTDG Model Regulations covers substances and mixtures that are classified
3166 for corrosivity to skin, metals or both. Valuable information can be obtained from UN RTDG Model
3167 Regulations and the modal transport regulations (ADR, RID, ADN and IMDG Code, ICAO TI).
3168 Existing test results obtained in the context of the modal transport regulations (ADR, RID, ADN
3169 and IMDG Code, ICAO TI) may be applied since the UN Test C.1 serves as reference for testing
3170 in both classification systems. See Annex VII for additional information on transport classification
3171 in relation to CLP classification.
3172 **3.17.7. Example of classification for corrosive to metals**

3173 The following table lists some examples of substances and mixtures that should be classified,
3174 or not, in Class 2.16 (according to known UN Test C.1 results) in comparison with predicted
3175 results for skin corrosion hazard.

3176 **Table 5: Examples of classified and non classified substances and mixtures in Class 2.16**


3177 Note: 'Corroded' means corrosion attack in the sense of UN Test C.1;
3178 'Not corroded' means corrosion resistant in the sense of UN Test C.1;
3179 'Positive' or 'Negative' are results from skin corrosion.

Substance or mixture	Steel	Aluminium	CLP Annex I, 2.16 classification	Skin (for comparison)
Hydrofluoric acid > 70 % (UN1790)	Not corroded	Corroded	Classified	Positive
Highly concentrated nitric acid (97 %) (UN2031)	Not corroded	Corroded	Classified	Positive
HNO ₃ red fuming (UN2032)	Not corroded	Not corroded	Not classified	Positive
Hydrochloric acid (diluted)	Corroded	Corroded	Classified	Negative

(UN1789)				
NaOH solutions (UN1824)	Not corroded	Corroded	Classified	Positive

3.17.7.1. Example of metal specimen plates after exposure to a corrosive mixture

Figure 18: Example of corroded metal plates after testing according to UN Test C.1 for a classified mixture

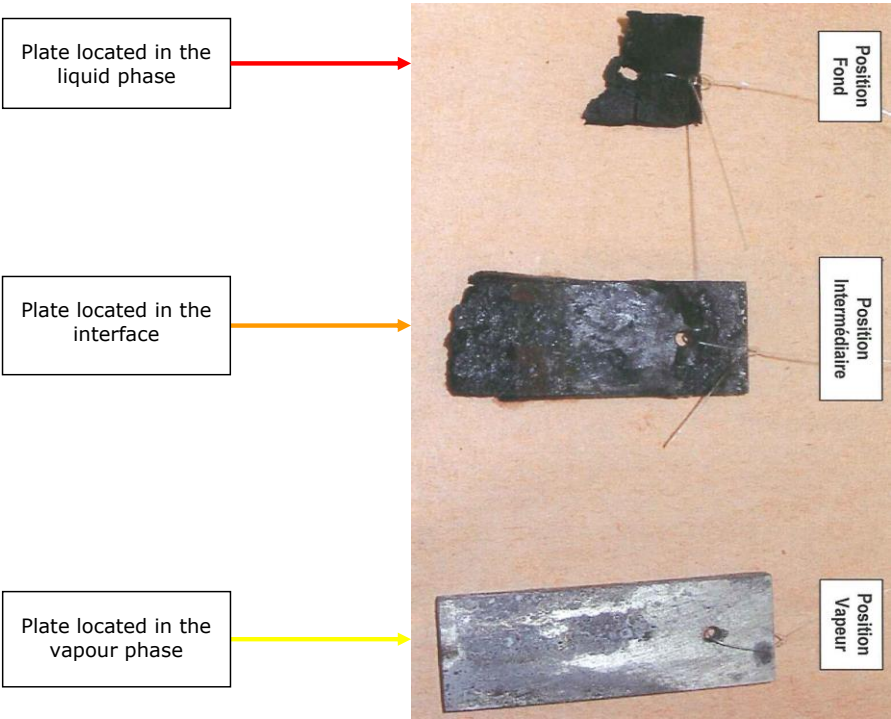

This example shows that the corrosion may develop at different rates according to the accurate position of the specimen related to the corroding mixture (sunk in the liquid, placed in the gas phase above liquid or at the liquid/gas interface).

3.17.8. References

ASTM G31-72(2004) *Standard Practice for Laboratory Immersion Corrosion Testing of Metals*.

Jones, D.A., *Principles and Prevention of Corrosion*, 2nd edition, 1996, Prentice Hall, Upper Saddle River, NJ. ISBN 0-13-359993-0 Page 50-52.

DIN 50905-1: 2007, *Corrosion of metals - Corrosion testing - Part 1: General guidance* (Korrosion der Metalle - Korrosionsuntersuchungen - Teil 1: Grundsätze).

3195

3196 **3.18. Desensitised explosives**3197 **3.18.1. Introduction**

3198 Desensitised explosives are covered in Annex I, section 2.17 of CLP. As the definition implies,
3199 they are derived from explosive substances and mixtures (see CLP section 2.1.1.1 (a) and (c)).
3200 However, desensitisation of explosive articles (CLP 2.1.1.1 (b)) is not possible.

3201 The desensitisation is achieved on the one hand by a dilution effect (reduction of the
3202 decomposition energy), on the other hand by disruption of the propagation of a shock wave in
3203 combination with an energy-absorbing endothermic evaporation.

3204 As the definition implies, desensitised explosives are generally mixtures consisting of the original
3205 explosive substance or mixture and the phlegmatiser or diluent. However, if the phlegmatiser is
3206 built directly into the crystal lattice and thus chemically bonded (see note in CLP 2.17.1.2. (a)),
3207 such desensitised explosive would be not a mixture but a substance.

3208 For the "regular" desensitised explosives it is essential that the original explosive and the diluent
3209 be HOMOGENEOUSLY mixed. For a solvent-based solid desensitised explosive this means that
3210 the diluent has to be evenly distributed among the crystals and not form a wet suspension in
3211 the lower part of a package with dry material on the top. Therefore, at least a sufficient amount
3212 of liquid has to remain between the crystals in order to function effectively as desensitiser;
3213 separation of excess material is tolerable. For desensitised explosives where a solid phlegmatizer
3214 is added to the explosive one has to make sure that the components are permanently
3215 homogeneously mixed. This is usually the case if the components have similar crystal sizes and
3216 comparable densities. See also note 1 in section [3.18.4.3](#).

3217 **3.18.2. Definitions and general considerations for desensitised explosives**

3218 CLP comprises the following definition for substances and mixtures that are desensitised
3219 explosives.

Annex I: 2.17.1.1 Definition

Desensitised explosives are solid or liquid explosive substances or mixtures which are phlegmatised to suppress their explosive properties in such a manner that they do not mass explode and do not burn too rapidly and therefore may be exempted from the hazard class 'Explosives' (see also paragraph 3 in section 2.1.4.1) ⁽¹⁾

2.17.1.2. The hazard class of desensitised explosives comprises:

(a) Solid desensitised explosives: explosive substances or mixtures, which are wetted with water or alcohols or are diluted with other substances, to form a homogeneous solid mixture to suppress their explosive properties.

NOTE: This includes desensitisation achieved by formation of hydrates of the substances.

(b) Liquid desensitised explosives: explosive substances or mixtures, which are dissolved or suspended in water or other liquid substances, to form a homogeneous liquid mixture to suppress their explosive properties.

⁽¹⁾ Unstable explosives as defined in Section 2.1 can also be stabilised by desensitisation and consequently may be classified as desensitised explosives, provided all criteria of Section 2.17 are met. In this case the desensitised explosive shall be tested according to test series 3 (Part I of the UN RTDG, Manual of Tests and Criteria) because information about

its sensitiveness to mechanical stimuli is likely to be important for determining conditions for safe handling and use. The results shall be communicated in the safety data sheet.

3.18.3. Relation to other physical hazards

The only possibility to "enter" the class of desensitised explosives is from the class of explosives (section 3.2) by dilution or phlegmatisation.

Classification as explosive and desensitised explosive are mutually exclusive. Further, note 3 in CLP Annex I table 2.17.1 explicitly states that "desensitised explosives do not fall additionally within the scope of sections [...] 3.7 (flammable liquids) and 3.8 (flammable solids)."

Explosives may sometimes be an active ingredient in aerosols, specifically used for medical purposes (i.e. nitroglycerine spray for treatment of heart emergencies); however, the concentration is usually so small that the respective aerosol is neither classified as explosive nor as desensitised explosive, because the decomposition energy will fall below the lower limit of 300 J/g of CLP 2.17.2.1 (c), so that classification as desensitised explosive does not apply.

Since desensitised explosives are by definition explosives that have been phlegmatised, they cannot be self-reactive substances and mixtures according to CLP Annex I 2.8.2.1 (a). By definition in Annex I section 2.15.1.1, organic peroxides cannot be classified as desensitised explosives.

Generally, desensitised explosives will not be classified as oxidising solids or liquids, respectively. It is advisable to also check the chapter about explosives in this guidance.

Although a simultaneous classification as pyrophoric solid / liquid (sections 3.10 and 3.11), self-heating (section 3.12) or water-reactive (section 3.13) cannot be precluded, such combination would be applicable only in extremely rare cases where the resulting intrinsic increase of risk has been intentionally accepted or designed. Substances and mixtures of these chapters usually consist of chemicals that are reactive towards air or water whereas explosives have a certain decomposition energy stored as potential energy in the molecule or mixture that can be released.

In rare cases, desensitised explosives may also be corrosive to metals (section 3.17); however, one has to be aware that metals used in test method UN C.1 of the UN-MTC may trigger decomposition. Therefore, it may not be possible to perform this test. In case of doubt, expert judgement should be applied.

3.18.4. Classification of substances and mixtures as desensitised explosives

Annex I:

2.17.2.1. Any explosive while in a desensitised state shall be considered in this class unless, in that state:

(a) It is intended to produce a practical explosive or pyrotechnic effect;

(b) It has a mass explosion hazard according to test series 6 (a) or 6 (b) or the corrected burning rate according to the burning rate test described in part V, subsection 51.4 of the UN RTDG, Manual of Tests and Criteria is greater than 1 200 kg/min; or

(c) The exothermic decomposition energy is less than 300 J/g.

NOTE 1: Substances or mixtures, which meet the criterion (a) or (b) in their desensitised state shall be classified as explosives (see Section 2.1). Substances or mixtures which meet the criterion (c) may fall within the scope of other physical hazard classes.

NOTE 2: The exothermic decomposition energy may be estimated using a suitable calorimetric technique (see section 20, sub-section 20.3.3.3 in Part II of the UN RTDG, Manual of Tests and Criteria).

3249 For a proper classification process, the following questions should be clearly answered:

- 3250 1. Is the "original" substance or mixture (= substance or mixture before desensitisation) an
3251 explosive as defined in chapter 2.1? If not, a classification as desensitised explosive is
3252 not applicable.
- 3253 2. Is the substance or mixture in the desensitised form intended to produce a practical
3254 explosive or pyrotechnic effect? If yes, it remains in the class of explosives.
- 3255 3. Does the diluent or phlegmatiser fulfil the intended function, especially with respect to a
3256 permanent homogeneous distribution (see explanations in section 2.17.1 above)? If not,
3257 a classification as desensitised explosive is not possible.
- 3258 4. What is the value of exothermic decomposition energy? If the answer is less than 300
3259 J/g, the class of desensitised explosives is not applicable; in this case, potential
3260 classification as flammable liquids or flammable solids should be checked.
- 3261 5. Is the phlegmatised explosive too sensitive or thermally unstable in accordance with ~~Test~~
3262 ~~Series~~ 3 of the UN-MTC? If yes, such mixture will remain an explosive of class 2.1. Where
3263 a mixture contains nitrocellulose, additional data of the nitrocellulose as described in
3264 Appendix 10 of the UN-MTC are needed in order to be used in nitrocellulose mixtures
3265 considered in this class.

3266 Subsequently, testing is required:

3267 Test 6 (a) and 6 (b) according to sections 16.4 and 16.5 of the UN-MTC should be performed to
3268 establish that the intended desensitised explosive has no mass explosion hazard.

3269 Alternatively, Test Series 2 according to Part I, section 2 of the UN-MTC may be performed with
3270 the phlegmatised explosive. If a negative result ("") is obtained in each of the three individual
3271 tests, it is "too insensitive for inclusion in the class of explosives" and thus may qualify for
3272 classification as a desensitised explosive. In this case, Test 6 (a) and 6 (b) need not be
3273 performed.

3274 Finally, the burning rate test of section 51.4 of the UN-MTC will confirm the classification as a
3275 desensitised explosive and lead to the assignment of the category. However, if the corrected
3276 burning rate is found to be 1200 kg/min or more, such material is moved back to the class of
3277 explosives.

3278 3.18.4.1. Identification of hazard information

3279 Since desensitised explosives are derived from explosives it is advisable to gather information
3280 about these properties first. In a second step, the diluent or phlegmatiser should be checked;
3281 key requirements are:

- 3282 • The diluent (phlegmatizer) has to be chemically inert towards the explosive. This means that
3283 this compound does not interact with the explosive in any way that would reduce the thermal
3284 or chemical stability.

174	Title
3285	<ul style="list-style-type: none"> Further, the diluent must be effective in its function as a desensitiser (see also section 3.18.1) with a homogeneous distribution over extended periods of time (i.e. duration of storage).
3286	
3287	
3288	3.18.4.2. Screening procedures and waiving of testing
3289	The screening procedures for explosives are described in section 3.2.4.2 of this guidance.
3290	Phlegmatised mixtures with a decomposition energy below 300 J/g should not be classified as desensitised explosive (see Annex I, section 2.17.2.1 (c)).
3291	
3292	3.18.4.3. Classification criteria
3293	Substances and mixtures of hazard class desensitised explosives are classified in four hazard categories on the basis of the corrected burning rate (UN-MTC, sub-section 51.4), according to Annex I, Table 2.17.1.
3294	
3295	

Annex I: Table 2.17.1

Criteria for desensitised explosives

Category	Criteria
1	Desensitised explosives with a corrected burning rate (AC) equal to or greater than 300 kg/min but not more than 1 200 kg/min
2	Desensitised explosives with a corrected burning rate (AC) equal to or greater than 140 kg/min but less than 300 kg/min
3	Desensitised explosives with a corrected burning rate (AC) equal to or greater than 60 kg/min but less than 140 kg/min
4	Desensitised explosives with a corrected burning rate (AC) less than 60 kg/min

Note 1: Desensitised explosives shall be prepared so that they remain homogeneous and do not separate during normal storage and handling, particularly if desensitised by wetting. The manufacturer/supplier shall give information in the safety data sheet about the shelf-life and instructions on verifying desensitisation. Under certain conditions the content of desensitising agent (e.g. phlegmatiser, wetting agent or treatment) may decrease during supply and use, and thus, the hazard potential of the desensitised explosive may increase. In addition, the safety data sheet shall include advice on avoiding increased fire, blast or projection hazards when the substance or mixture is not sufficiently desensitised.

Note 2: Explosive properties of desensitised explosives shall be determined by test series 2 of the UN RTDG, Manual of Tests and Criteria, and shall be communicated in the safety data sheet.

Note 3: For the purposes of storage, supply and use, desensitised explosives do not fall additionally within the scope of Sections 2.1 (explosives), 2.6 (flammable liquids) and 2.7 (flammable solids).

3296	3.18.4.4. Testing and evaluation of hazard information
3297	General considerations
3298	Due to the high risks relating to the handling of explosives, the testing personnel should be sufficiently qualified and experienced in performing the required tests. Please refer to section 3.2.4.4 for further details.
3299	
3300	

3301 **Additional notes on best practice for testing**


3302 Before applying the desensitiser, the explosive properties of the “original” substance or mixture
3303 should be known (in general: results of Test Series 2, 3 (a) and 3 (b) of the UN-MTC; further
3304 data about thermal stability such as Test 3 (c) or appropriate data determined according to
3305 section 20.3.3.3 of the UN-MTC or data from application of microcalorimetric methods).

3306 Subsequently, the effect of the diluent / phlegmatiser should be examined; see section [3.18.4.4](#)
3307 of this guidance.

3308 **3.18.4.5. Decision logic**

3309 Classification of substances or mixtures as desensitised explosives is done according to decision
3310 logics 2.17.1 in Annex I CLP.

 **NOTE: The person responsible for desensitised explosives should be experienced in this field and be familiar with the criteria for classification.**

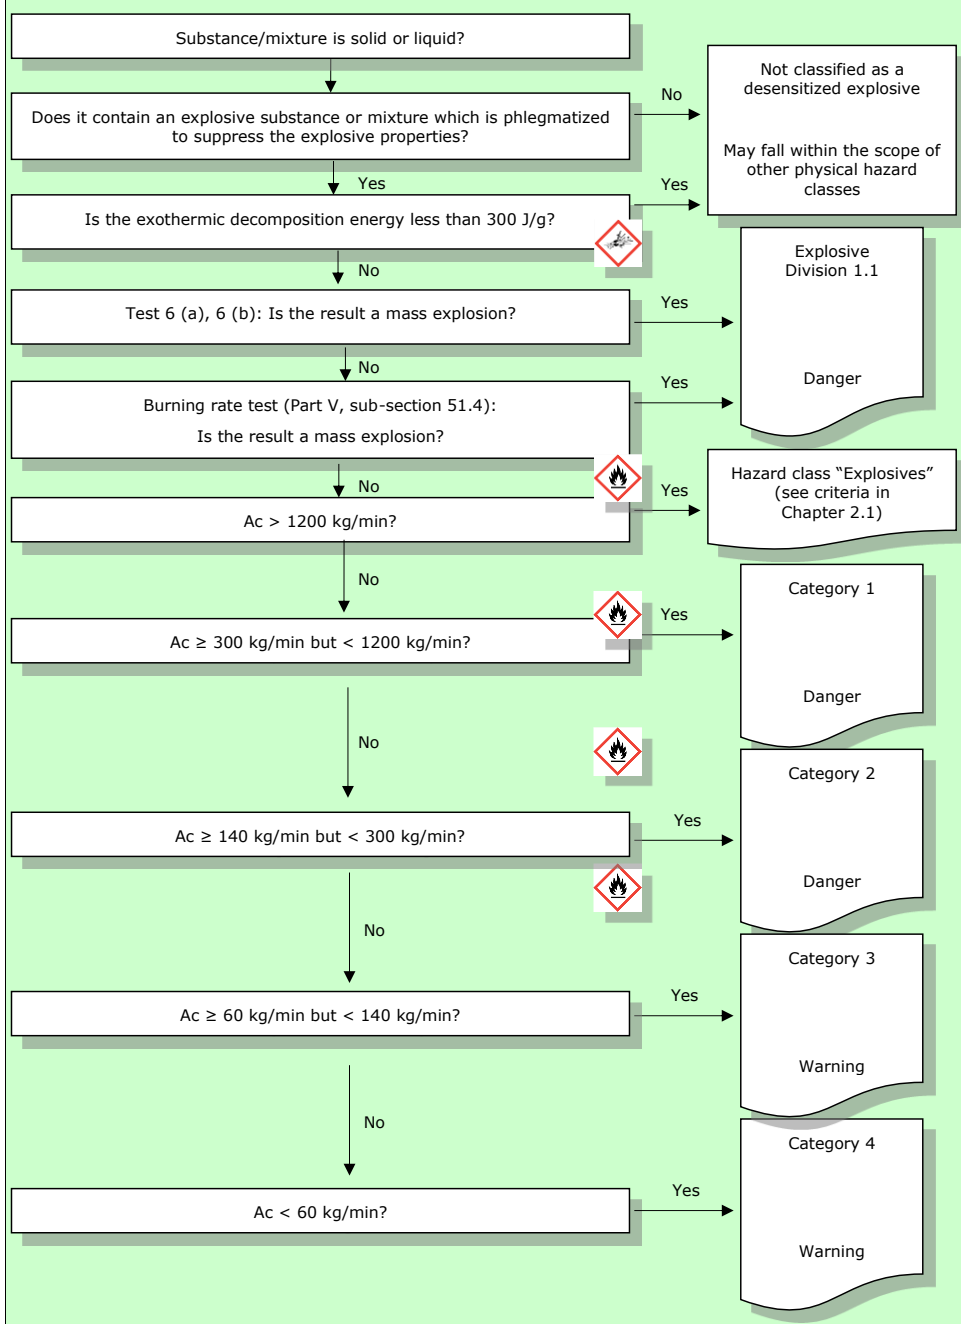



Annex I: Figure 2.17.1 *Desensitised explosives*

3.18.5. Hazard communication for desensitised explosives**3.18.5.1. Pictograms, signal words, hazard statements and precautionary statements**

Table 2.17.2 of CLP Annex I provides the label elements for hazard class desensitised explosives.

Label elements must be used for substances and mixtures meeting the criteria for classification in this hazard class in accordance with Table 2.17.2.

Annex I: 2.16.3. Table 2.17.2 Label elements for desensitised explosives

Classification	Category 1	Category 2	Category 3	Category 4
GHS Pictogram				
Signal Word	Danger	Danger	Warning	Warning
Hazard Statement	H206 Fire, blast or projection hazard; increase risk of explosion if desensitising agent is reduced	H207 Fire or projection hazard; increased risk of explosion if desensitising agent is reduced	H207 Fire or projection hazard; increased risk of explosion if desensitising agent is reduced	H208 Fire hazard; increased risk of explosion if desensitising agent is reduced
Precautionary Statement Prevention	P210	P210	P210	P210
	P212	P212	P212	P212
	P230	P230	P230	P230
	P233	P233	P233	P233
	P280	P280	P280	P280
Precautionary Statement Response	P370 + P380+ P375	P370 + P380+ P375	P370 + P380+ P375	P371 + P380+ P375
Precautionary Statement Storage	P401	P401	P401	P401
Precautionary Statement Disposal	P501	P501	P501	P501

The wording of the Precautionary Statements is found in CLP Annex IV, Part 2.

3.18.6. Relation to transport classification

Since desensitised explosives have a high rank in the precedence tables of the Dangerous Goods Regulations, such substances and mixtures will be classified likewise in CLP. Unlike in the CLP,

3321 desensitised explosives are not a hazard class of their own for transport. Instead such substances
3322 and mixtures are transported under specific UN-numbers in class 3 (liquids) or division 4.1
3323 (solids).

3324 **3.18.7. Examples of classification for desensitised explosives**

3325 A detailed example for the classification of a new substance as a desensitised explosive can be
3326 found on the UN Website using the following link:

3327 [ST/SG/AC.10/C.3/2021/32 \(unece.org\)](https://www.un.org/press/en/2021/sgsm162021.htm)

3328 This document describes in detail testing that has been performed for the original explosive
3329 substance, and subsequently the test results in the desensitised form up to the assignment of a
3330 category.

EUROPEAN
P.O. BOX 400, FI-00121 HELSINKI, FINLAND

ECHA.EUROPA.EU

CHEMICALS

AGENCY

